



Review DRAFT – 5-16-03

Lower Skagit River Tributaries Temperature Total Maximum Daily Load

May 2003 - DRAFT

Publication No. 03-03-025



Printed on Recycled Paper

This report is available on the Department of Ecology home page on the World Wide Web at <http://www.ecy.wa.gov/biblio/0303025.html>

For additional copies of this publication, please contact:

Department of Ecology Publications Distributions Office

Address: PO Box 47600, Olympia WA 98504-7600

E-mail: ecypub@ecy.wa.gov

Phone: (360) 407-7472

Refer to Publication Number 03-03-025

The Department of Ecology is an equal opportunity agency and does not discriminate on the basis of race, creed, color, disability, age, religion, national origin, sex, marital status, disabled veteran's status, Vietnam era veteran's status, or sexual orientation.

If you have special accommodation needs or require this document in alternative format, please contact Joan LeTourneau, Environmental Assessment Program, at (360)-407-6764 (voice). Ecology's telecommunications device for the deaf (TDD) number at Ecology Headquarters is (360) 407-6006.



Lower Skagit River Tributaries Temperature Total Maximum Daily Load

by

Brian Zalewsky

Washington State Department of Ecology
Environmental Assessment Program

May 2003 - DRAFT

Water Body Numbers:

Publication No. 03-03-025



Printed on Recycled Paper

This page is purposely left blank

Table of Contents

	<u>Page</u>
List of Appendices	ii
List of Figures	iii
List of Tables	v
Abstract	vii
Acknowledgements	viii
Introduction	1
Overview of Stream Heating Processes	4
Pollutants and Surrogate Measures	17
Background	19
The Study Area	19
Land Use in the Study Area	22
Fisheries Resources	27
Salmonid Stream Temperature Requirements	28
Instream Flows in the Lower Skagit River	32
Water Withdrawals	33
Stakeholders and Key Projects in the Study Area	34
Applicable Water Quality Criteria	41
Water Quality and Resource Impairments	42
Seasonal Variation	44
Technical Analysis	47
Stream Heating Processes	47
Current Conditions	47
Analytical Framework	63
Calibration and Verification of the QUAL2k Model	66
Loading Capacity	73
Carpenter Creek	75
Fisher Creek	75
Hansen Creek	75
Lake Creek	76
Nookachamps Creek	76
East Fork Nookachamps Creek	76
Load Allocations	84
Margin of Safety	89
Management Recommendations	90
References Cited	92

List of Appendices

- A. Instream water temperature standard exceedences and station disposition report for the 2001 lower Skagit River tributaries temperature TMDL
- B. Tables
 - B1. Riparian codes used in Shade model vegetation classification.
 - B2. Additional riparian codes used for 100 year old riparian vegetation.
 - B3. 7Q2 and 7Q10 low flow model inputs for discharge, width, depth, and velocity.
 - B4. Summary of flow measurements in the lower Skagit River study area.

List of Figures

1.	Lower Skagit River study area.	3
2.	Conceptual model of factors that affect stream temperature.	4
3.	Heat transfer processes in the QUAL2k model that affect water temperature.	5
4.	Heat fluxes in Hansen Creek near the mouth under current riparian vegetation conditions.	7
5.	Parameters that affect shade, and geometric relationships.	10
6.	Relationship between angular canopy density and riparian buffer width for small streams in old-growth riparian stands.	12
7.	Riparian buffer effects on microclimate.	14
8.	Pathways of human influence on water temperatures in stream channels.	17
9.	Generalized land use within the study area.	23
10.	Landstat image of Carpenter Creek and Fisher Creek sub-basin showing matrix of land uses.	24
11.	Landstat image of Hansen Creek sub-basin showing matrix of land uses.	25
12.	Landstat image of Nookachamps Creek and East Fork Nookachamps Creek sub-basin showing matrix of land uses.	26
13.	Highest daily maximum temperatures in the lower Skagit River tributaries in 2000 on the hottest day of the year.	45
14.	Maximum 7-day averages of daily maximum temperature in the lower Skagit River tributaries in 2000.	46
15.	Location of Ecology air and water temperature recording devices, relative humidity station, and NOAA NCDC Cooperative weather station.	48
16.	Daily maximum water temperatures in Carpenter Creek and Fisher Creek from June to September 2001.	49
17.	Daily maximum water temperatures in Hansen Creek, Red Creek, Lake Creek (03N04), Nookachamps Creek, and Otter Pond Creek from June to September 2001.	50
18.	Daily maximum water temperatures in East Fork Nookachamps Creek and Turner Creek from June to September 2001.	51
19.	Location of Skagit County air and water temperature recording devices, Ecology relative humidity station, and NOAA NCDC Cooperative weather station.	52
20.	Relationship between bankfull width and drainage area in the lower Skagit River tributaries.	53
21.	Ecology and NOAA NCDC stations for climate data.	57

List of Figures (cont.)

22.	Effective shade from current riparian vegetation in Carpenter Creek and Fisher Creek	60
23.	Effective shade from current riparian vegetation in Hansen Creek and Lake Creek.	61
24.	Effective shade from current riparian vegetation in Nookachamps Creek and East Fork Nookachamps Creek.	63
25.	Predicted and observed water temperatures in Carpenter Creek during calibration and verification periods.	67
26.	Predicted and observed water temperatures in Fisher Creek during calibration and verification periods.	68
27.	Predicted and observed water temperatures in Hansen Creek during calibration and verification periods.	69
28.	Predicted and observed water temperatures in Lake Creek during calibration and verification periods.	70
29.	Predicted and observed water temperatures in Nookachamps Creek during calibration and verification periods.	71
30.	Predicted and observed water temperatures in East Fork Nookachamps Creek during calibration and verification periods.	72
31.	Predicted daily maximum temperatures in Carpenter Creek under critical conditions for the TMDL.	77
32.	Predicted daily maximum temperatures in Fisher Creek under critical conditions for the TMDL.	78
33.	Predicted daily maximum temperatures in Hansen Creek under critical conditions for the TMDL.	79
34.	Predicted daily maximum temperatures in Lake Creek under critical conditions for the TMDL.	80
35.	Predicted daily maximum temperatures in Nookachamps Creek under critical conditions for the TMDL.	81
36.	Predicted daily maximum temperatures in East Fork Nookachamps Creek under critical conditions for the TMDL.	82

List of Tables

1. 1998 303(d) Listings for temperature in the lower Skagit River.	1
2. Factors that influence stream shade.	10
3. Stream type classifications in the lower Skagit River study area.	27
4. Tolerable and preferred temperature ranges (°C) for adult migration, spawning, and incubation of embryos for native salmonids in the Pacific Northwest.	29
5. Lower lethal, upper lethal, and preferred temperatures for selected salmonids.	30
6. Modes of thermally induced cold water fish mortality.	31
7. Summary of consumptive water rights in the lower Skagit River tributaries.	34
8. Highest daily maximum temperatures in the lower Skagit River tributaries during 2001.	43
9. Estimated 7Q2 and 7Q10 flows for selected streams in the study area.	53
10. Summary of hydraulic geometry relationships with flow in the lower Skagit River study area.	54
11. Estimated Manning's roughness coefficients (n)	55
12. Rosgen classification for the lower Skagit River study area.	55
13. Estimated daily maximum and minimum air temperatures at Mount Vernon 3NW on days and weeks with the highest daily maximum temperatures for a median year and 90 th percentile year.	56
14. Comparison between air temperatures at Mount Vernon 3NW and Ecology stations during 2001 calibration and verification periods.	58
15. Summary of RMSE of differences between the predicted and observed daily maximum temperatures in the lower Skagit River study area.	66
16. Load allocations for effective shade in Carpenter Creek.	84
17. Load allocations for effective shade in Fisher Creek.	85
18. Load allocations for effective shade in Hansen Creek.	85
19. Load allocations for effective shade in Lake Creek.	86
20. Load allocations for effective shade in Nookachamps Creek.	87
21. Load allocations for effective shade in East Fork Nookachamps Creek.	88

This page is purposely left blank

Abstract

The study area for this TMDL includes the major tributaries to the lower Skagit River below Skiyou Island. The 303(d) listings for temperature in streams in lower Skagit River basin include Carpenter Creek, Fisher Creek, Hansen Creek, Lake Creek, Nookachamps Creek, East Fork Nookachamps Creek, Red Creek, Turner Creek, and Otter Pond Creek.

Significant reductions in water temperature are predicted for hypothetical conditions with 100-yr old riparian vegetation, improvements in riparian microclimate, and reductions in channel width. Maximum reductions in water temperature would likely occur under conditions resulting from a combination of mature riparian vegetation, historic channel complexities, and pre-settlement flow regimes. Potential reduced temperatures are predicted to be less than the 18 °C in class A waters in most of the segments that were evaluated. Those segments not expected to be less than the 18°C standard comprise the outlets of Lake Mc Murray and Big Lake. Surface water temperatures in both Big Lake and Lake Mc Murray frequently exceed 22°C during the summer months.

This technical assessment uses effective shade as a surrogate measure of heat flux to fulfill the requirements of Section 303(d) for a Total Maximum Daily Load (TMDL) for temperature. Effective shade is defined as the fraction of incoming solar short wave radiation above the vegetation and topography that is blocked from reaching the surface of the stream.

In addition to the load allocations for effective shade, other management activities are recommended for compliance with water quality standards for water temperature, including measures to promote water use efficiency and increase groundwater inflows into the streams.

Acknowledgements

We would like to thank the following people for their contributions to this study:

- Dustin Bilhimer (Ecology) for his analyses of GIS and other environmental data.
- Greg Pelletier, Mindy Roberts, and Anita Stohr (Ecology) for consultation on GIS and modeling.
- Darrel Anderson and Greg Pelletier (Ecology) for review of the draft report and many valuable comments.
- Sally Lawrence (Ecology) for review of the draft report and coordination of the public review process for the study and drafting of the section of the report on the instream flow rules.
- Joan LeTourneau for formatting the final report.

Introduction

The lower Skagit River Basin includes portions of Skagit and Snohomish Counties in northwest Washington (Figure 1). Ecology's assessment of the lower Skagit River watershed identified the system as a high priority for the development of a Total Maximum Daily Load (TMDL) for temperature. The purpose of the lower Skagit River Temperature TMDL is to characterize water temperatures in the basin and establish load and wasteload allocations for heat sources in order to meet water quality standards for surface water temperature. This study focuses on the 303(d) listings in Carpenter Creek, Fisher Creek, Hansen Creek, Nookachamps Creek, East Fork Nookachamps Creek, Red Creek, Turner Creek, and Otter Pond Creek for exceeding the States water quality standards for temperature (Table 1).

Table 1. 1998 303(d) listings for temperature in the lower Skagit River.

WB NAME	Township	Range	Section	Watercourse IIP 303(d) number	Waterbody ID number	1996 303(d) List	1998 303(d) List
CARPENTER CREEK	33N	04E	17	YA61IC	WA-03-1011		X
CARPENTER CREEK	33N	04E	20	YA61IC	WA-03-1011		X
CARPENTER CREEK	33N	04E	9	YA61IC	WA-03-1011		X
COAL CREEK	35N	05E	10	RE17FI	None11		X
CUMBERLAND CREEK	35N	06E	23	QX54OS	None7		X
DAY CREEK	35N	06E	28	QT99QB	None8		X
FISHER CREEK	33N	04E	30	JK73SN	WA-03-1012		X
HANSEN CREEK	35N	05E	29	PU87PF	WA-03-1019		X
HANSEN CREEK	35N	05E	20	PU87PF	WA-03-1019		X
HANSEN CREEK	35N	05E	17	PU87PF	WA-03-1019		X
INDIAN (BIG) SLOUGH				390KRD	WA-03-3100	X	X
INDIAN (BIG) SLOUGH				390KRD	WA-03-3100	X	X
INDIAN (BIG) SLOUGH				390KRD	WA-03-3100		X
JOE LEARY SLOUGH				390KRD	WA-03-3000		X
JOE LEARY SLOUGH				390KRD	WA-03-3000	X	X
JOE LEARY SLOUGH				390KRD	WA-03-3000	X	X
JONES CREEK	35N	06E	17	UT72SQ	None9		X
MUD LAKE CREEK	34N	04E	11	IL21OS	None10		X
NOOKACHAMPS CREEK	34N	04E	25	LZ60MT	WA-03-1017		X
NOOKACHAMPS CREEK	34N	04E	25	LZ60MT	WA-03-1017		X
NOOKACHAMPS CREEK	33N	05E	8	ZZ50GP	WA-03-1017		X
NOOKACHAMPS CREEK	34N	04E	4	LZ60MT	WA-03-1017		X
NOOKACHAMPS CREEK	34N	04E	14	LZ60MT	WA-03-1017		X
NOOKACHAMPS CREEK, E.F.	34N	04E	11	DV97DN	WA-03-4200		X
NOOKACHAMPS CREEK, E.F.	34N	05E	19	FE06WU	WA-03-4200		X
OTTER POND CREEK	34N	04E	25	GK78TY	None5		X
RED CREEK	35N	05E	17	TL30EW	None6		X
TURNER CREEK	34N	05E	18	EI77IQ	None12		X
WISEMAN CREEK	35N	05E	27	XZ26WG	None13		X

Waterbodies in bold denote 303(d) listings not included in the study area.

Section 303(d) of the federal Clean Water Act mandates that the state establish Total Maximum Daily Loads (TMDLs) for surface waters that do not meet standards after application of technology-based pollution controls. The U.S. Environmental Protection Agency (EPA) has promulgated regulations (40 CFR 130) and developed guidance (EPA, 1991) for establishing TMDLs.

Under the Clean Water Act, each state has its own water quality standards designed to protect, restore, and preserve water quality. Water quality standards consist of designated uses, such as cold water biota and drinking water supply, and criteria, usually numeric criteria, to achieve those uses. When a lake, river, or stream fails to meet water quality standards, the Clean Water Act requires the state to place the water body on a list of "impaired" water bodies and to prepare an analysis called a Total Maximum Daily Load (TMDL).

The goal of a TMDL is to ensure the impaired water will attain water quality standards. A TMDL includes a written, quantitative assessment of water quality problems and of the pollutant sources that cause the problem. The TMDL determines the amount of a given pollutant that can be discharged to the water body and still meet standards, the loading capacity, and allocates that load among the various sources. If the pollutant comes from a discrete source (referred to as a point source) such as an industrial facility's discharge pipe, that facility's share of the loading capacity is called a wasteload allocation. If it comes from a diffuse source (referred to as a nonpoint source) that portion of the loading capacity is called a load allocation.

The TMDL must also consider seasonal variations and include a margin of safety that takes into account any lack of knowledge about the causes of the water quality problem or its loading capacity. The sum of the individual allocations and the margin of safety must be equal to or less than the loading capacity.

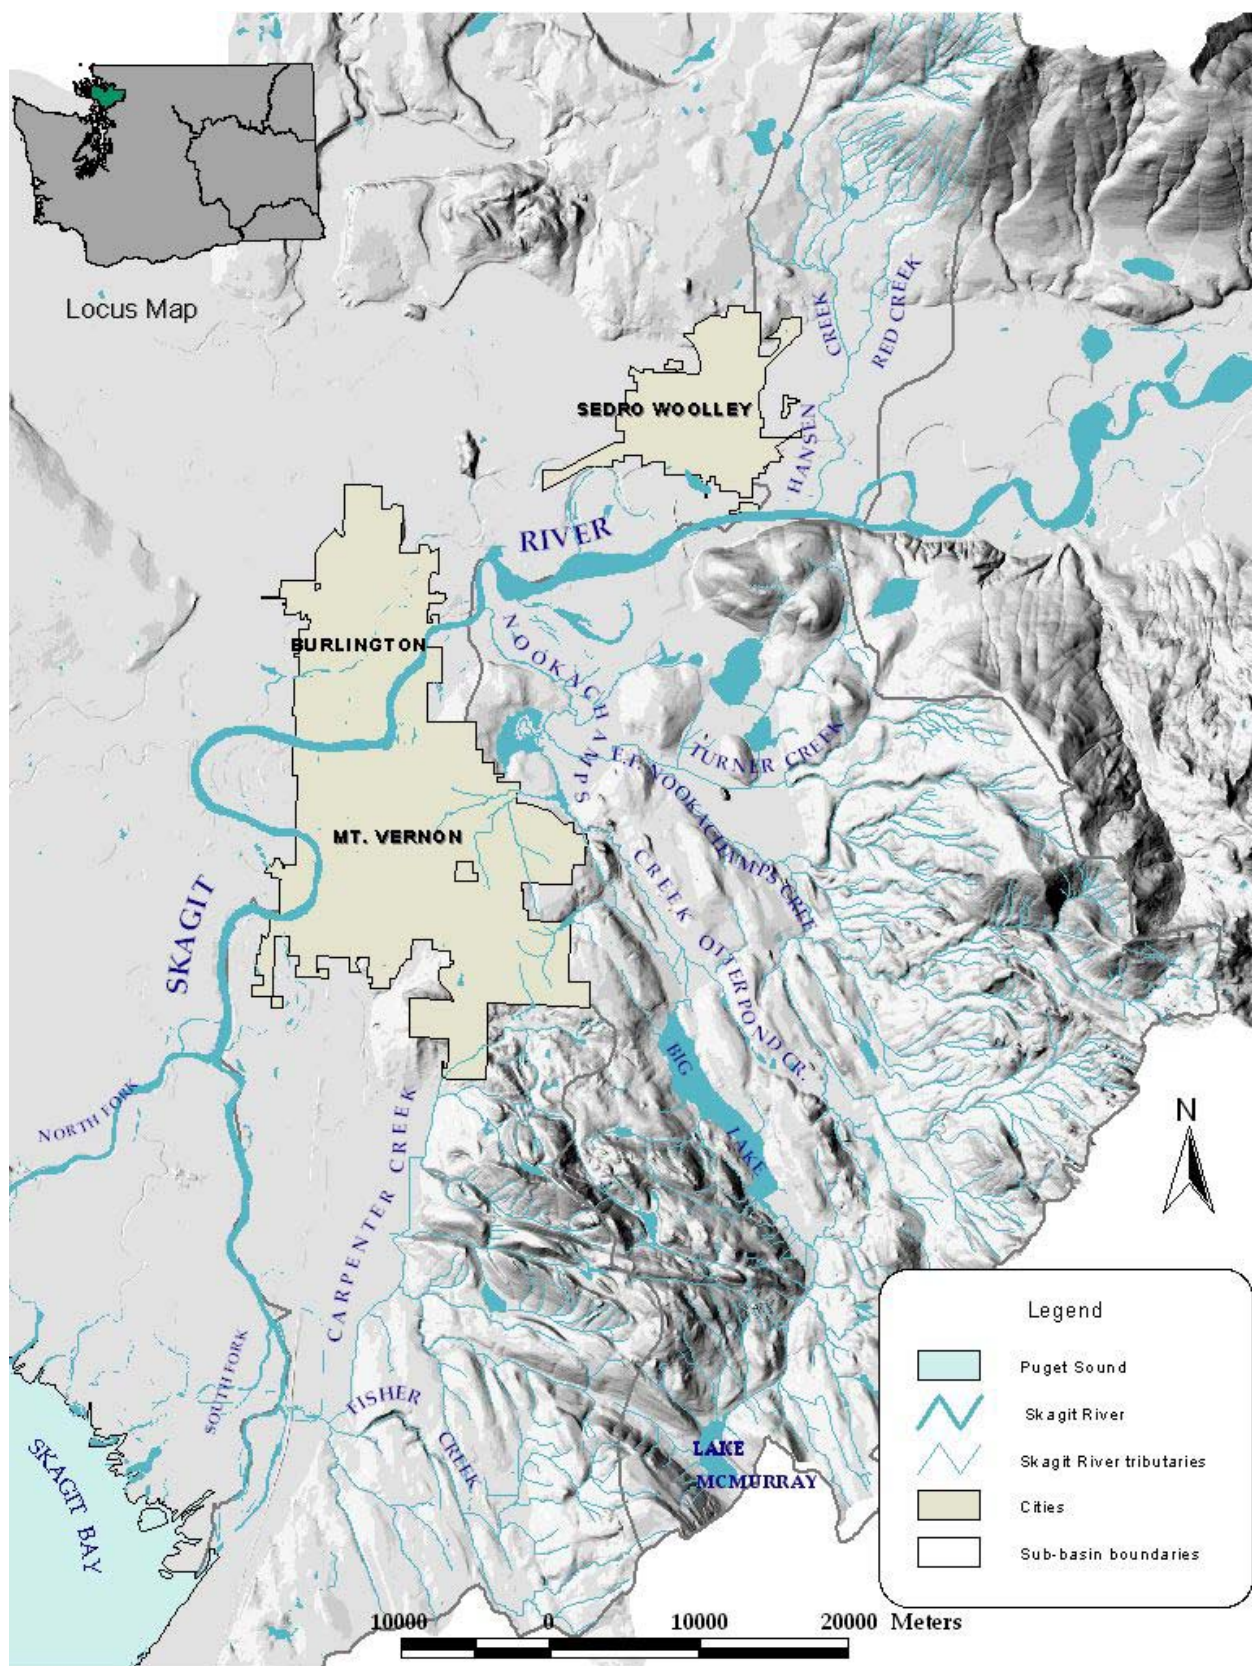


Figure 1. Study area- Lower Skagit River.

Overview of Stream Heating Processes

At any particular instant of time, a defined stream reach is capable of sustaining a particular water column temperature. A parcel of water traversing a stream/river reach enters that reach with a given temperature. If that temperature is greater than the energy balance is capable of supporting, the temperature will decrease. If that temperature is less than energy balance is capable of supporting, the temperature will increase. Stream temperature change within a stream segment is induced by the energy balance in the parcel of water that is affected by the surrounding environment during transport of the parcel through the reach. The general relationships between stream parameters, thermodynamic processes (heat and mass transfer) and stream temperature change is outlined in Figure 2.

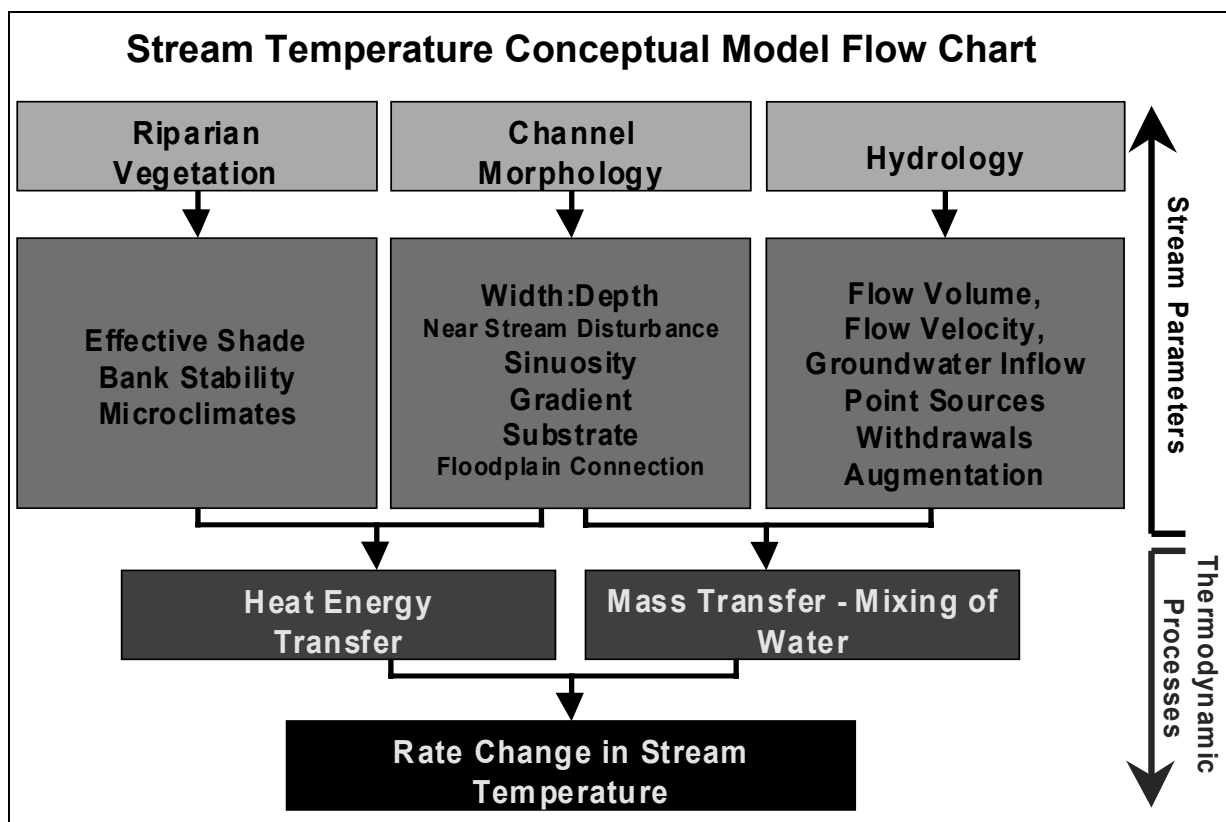


Figure 2. Conceptual model of factors that affect stream temperature.

Adams and Sullivan (1987) reported that the following environmental variables were the most important drivers of water temperature in forested streams:

- **Stream depth.** Stream depth is the most important variable of stream size for evaluating energy transfer. Stream depth affects both the magnitude of the stream temperature fluctuations and the response time of the stream to changes in environmental conditions.

- **Air temperature.** Daily average stream temperatures are strongly influenced by daily average air temperatures. When the sun is not shining, the water temperature in a volume of water tends to approach the dew-point temperature (Edinger et al. 1974).
- **Solar radiation and riparian vegetation.** The daily maximum temperatures in a stream are strongly influenced by removal of riparian vegetation because of diurnal patterns of solar heat flux. Daily average temperatures are less affected by removal of riparian vegetation.
- **Groundwater.** Since groundwater is generally much cooler than the stream temperatures during summer, inflows can have an important depressing effect on stream temperature. This effect will depend on the rate of groundwater inflow relative to the flow in the stream as well as the difference in temperatures between the groundwater and the stream.

Heat Budgets and Temperature Prediction

The transport and fate of heat in natural waters has been the subject of extensive study. Edinger et al. (1974) provide an excellent and comprehensive report of this research. Thomann and Mueller (1987) and Chapra (1997) have summarized the fundamental approach to mathematical modeling of temperature in natural waters that was used in this temperature TMDL analysis. Figure 3 shows the major heat energy processes or fluxes in a heat budget that controls the changes in temperature in a given volume of water.

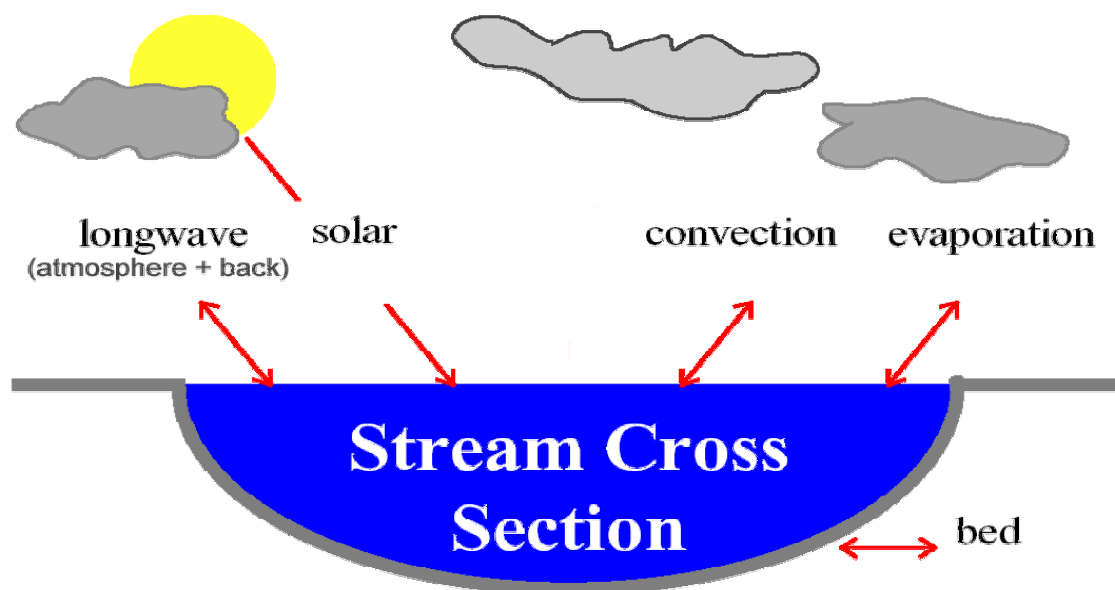


Figure 3. Heat transfer processes in the QUAL2K model that affect water temperature (net heat flux = solar + longwave atmosphere + longwave back + convection + evaporation + bed). Heat flux between the water and stream bed occurs through conduction and hyporheic exchange.

The heat flux components with the greatest magnitude, and therefore the greatest influence on water temperature, are as follows (Edinger et al. 1974):

- **Short-wave solar radiation.** Short-wave solar radiation is the radiant energy which passes directly from the sun to the earth. Short-wave solar radiation is contained in a wavelength range between 0.14 μm and about 4 μm . At NOAA's ISIS station in Seattle the daily average global short-wave solar radiation for July-August 2001 was 240 W/m² (NOAA, 2003). The peak values during daylight hours are typically about 3 times higher than the daily average. Short-wave solar radiation constitutes the major thermal input to an un-shaded body of water during the day when the sky is clear.
- **Long-wave atmospheric radiation.** The long-wave radiation from the atmosphere ranges in wavelength range from about 4 μm to 120 μm . Long-wave atmospheric radiation depends primarily on air temperature and humidity and increases as both of those increase. It constitutes the major thermal input to a body of water at night and on warm cloudy days. The daily average heat flux from long-wave atmospheric radiation typically ranges from about 300 to 450 W/m² at mid latitudes (Edinger et al. 1974).
- **Long-wave back radiation from the water to the atmosphere.** Water sends heat energy back to the atmosphere in the form of long-wave radiation in the wavelength range from about 4 μm to 120 μm . Back radiation accounts for a major portion of the heat loss from a body of water. Back radiation increases as water temperature increases. The daily average heat flux out of the water from long-wave back radiation typically ranges from about 300 to 500 W/m² (Edinger et al. 1974).

Figure 4 shows the relative importance of the fluxes in the heat budget at a station near the mouth of Hansen Creek with current riparian vegetation. The solar short wave radiation flux is typically the dominant component of the heat budget during the daytime in unshaded streams. The daily changes in water temperature typically follow the same pattern as solar radiation delivered to a stream. The solar shortwave flux can be controlled by managing vegetation in the riparian areas adjacent to the stream. Shade that is produced by riparian vegetation can reduce the solar shortwave flux. The net heat flux to a stream can be managed by increasing the shade from vegetation, which reduces the shortwave solar flux. Other processes, such as longwave radiation, convection, and evaporation also result in heat flux into or out of a stream.

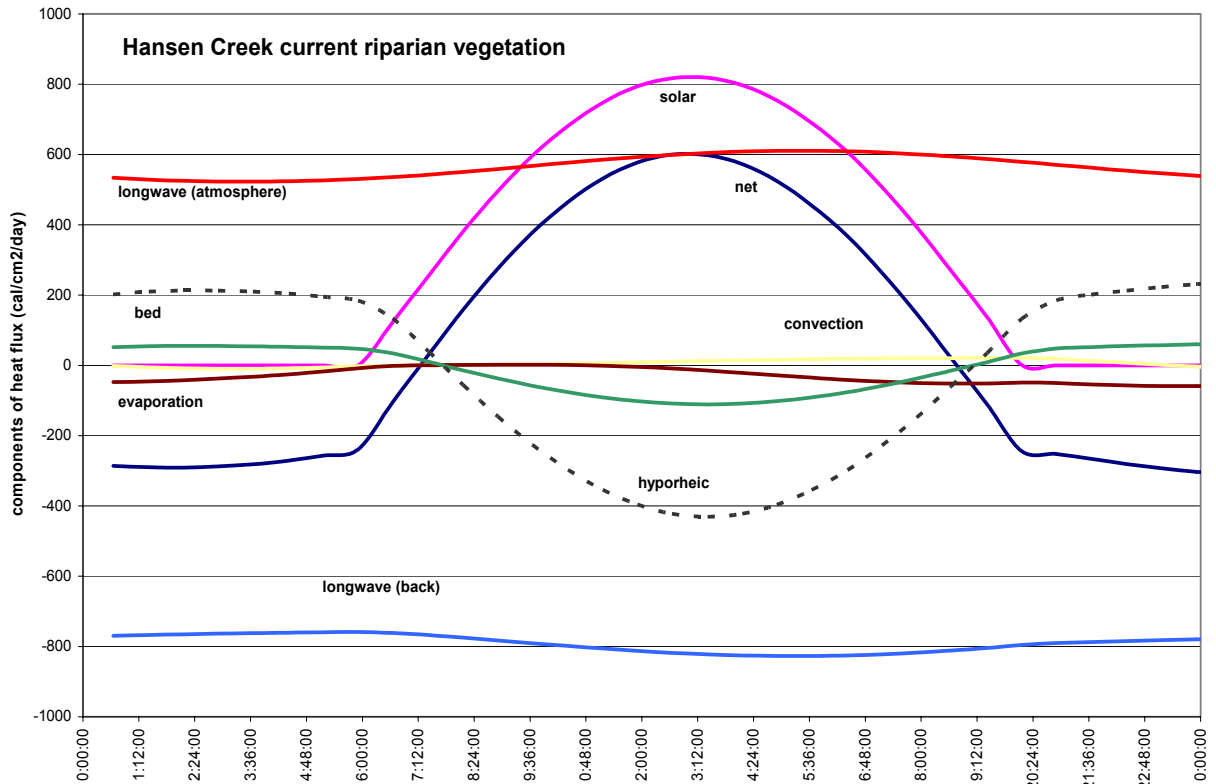


Figure 4. Heat fluxes in Hansen Creek near the mouth under current riparian vegetation conditions. (net heat flux = solar + longwave atmosphere + longwave back + air convection + evaporation + sediment conduction + hyporheic)

Heat exchange between the stream and the streambed has an important influence on water temperature. The temperature of the stream bed is typically warmer than the overlying water at night and cooler than the water during the daylight hours. Heat is typically transferred from the water into the stream bed during the day then back into the stream during the night (Adams and Sullivan, 1989). This has the effect of dampening the diurnal range of stream temperature variations without affecting the daily average stream temperature.

The bulk temperature of a vertically mixed volume of water in a stream segment under natural conditions tends to increase or decrease with time during the day according to whether the net heat flux is either positive or negative. When the sun is not shining, the water temperature tends toward the dew-point temperature (Edinger et al. 1974; Brady et al. 1969). The equilibrium temperature of a natural body of water is defined as the temperature at which the water is in equilibrium with its surrounding environment and the net rate of surface heat exchange would be zero. The dominant contribution to the seasonal variations in the equilibrium temperature of water is from seasonal variations in the air temperature and dew-point temperature. The main source of hourly fluctuations in water temperature during the day is solar radiation. Solar radiation generally reaches a maximum during the day when the sun is highest in the sky unless cloud cover or shade from vegetation interferes.

The complete heat budget for a stream also accounts for the mass transfer processes which depend on the amount of flow and the temperature of water flowing into and out of a particular volume of water in a segment of a stream. Mass transfer processes in open channel systems can occur through advection, dispersion, and mixing with tributaries and groundwater inflows and outflows. Mass transfer relates to transport of flow volume downstream, instream mixing and the introduction or removal of water from a stream. For instance, flow from a tributary will cause a temperature change if the temperature is different from the receiving water.

Thermal Role of Riparian Vegetation

The role of riparian vegetation in maintaining a healthy stream condition and water quality is well documented and accepted in the scientific literature. Summer stream temperature increases due to the removal of riparian vegetation is well documented (*e.g.* Holtby 1988, Lynch et al. 1984, Rishel et al. 1982, Patric 1980, Swift and Messer 1971, Brown et al. 1971, and Levno and Rothacher 1967). These studies generally support the findings of Brown and Krygier (1970) that loss of riparian vegetation results in larger daily temperature variations and elevated monthly and annual temperatures. Adams and Sullivan (1989) also concluded that daily maximum temperatures are strongly influenced by the removal of riparian vegetation because of the effect of diurnal fluctuations in solar heat flux.

Summaries of the scientific literature on the thermal role of riparian vegetation in forested and agricultural areas are provided by Belt et al., 1992, Beschta et al. 1987, Bolton and Monahan 2001, Castelle and Johnson 2000, CH2MHill 2000, GEI 2002, Ice 2001, and Wenger 1999. All of these summaries recognize that the scientific literature indicates that riparian vegetation plays an important role in controlling stream temperature. The list of important benefits that riparian vegetation has upon the stream temperature includes:

- Near stream vegetation height, width and density combine to produce shadows that can reduce solar heat flux to the surface of the water.
- Riparian vegetation creates a thermal microclimate that generally maintains cooler air temperatures, higher relative humidity, lower wind speeds, and cooler ground temperatures along stream corridors.
- Bank stability is largely a function of near stream vegetation. Specifically, channel morphology is often highly influenced by land cover type and condition by affecting flood plain and instream roughness, contributing coarse woody debris and influencing sedimentation, stream substrate compositions and stream bank stability.

The warming of water temperatures as a stream flows downstream is a natural process. However, the rates of heating can be dramatically reduced when high levels of shade exist and heat flux from solar radiation is minimized. The overriding justification for increases in shade from riparian vegetation is to minimize the contribution of solar heat flux in stream heating. There is a natural maximum level of shade that a given stream is capable of attaining. The importance of shade decreases as the width of a stream increases.

The distinction between reduced heating of streams and actual cooling is important. Shade can significantly reduce the amount of heat flux that enters a stream. Whether there is a reduction in the amount of warming of the stream, maintenance of inflowing temperatures, or cooling of a stream as it flows downstream depends on the balance of all of the heat exchange and mass transfer processes in the stream.

Effective Shade

Shade is an important parameter that controls the stream heating derived from solar radiation. Solar radiation has the potential to be one of the largest heat transfer mechanisms in a stream system. Human activities can degrade near-stream vegetation and/or channel morphology, and in turn, decrease shade. Reductions in stream surface shade have the potential to cause significant increases in heat delivery to a stream system. Stream shade is an important factor in describing the heat budget for the present analysis. Stream shade may be measured or calculated using a variety of methods including hemispherical photography, solar pathfinder, and angular canopy densitometer (Chen, 1996, Chen et al., 1998, Ice, 2001, OWEB, 1999, Teti, 2001).

Shade is the amount of solar energy that is obscured or reflected by vegetation or topography above a stream. Effective shade is defined as the fraction or percentage of the total possible solar radiation heat energy that is prevented from reaching the surface of the water:

$$\text{effective shade} = (J_1 - J_2)/J_1$$

where J_1 is the potential solar heat flux above the influence of riparian vegetation and topography and J_2 is the solar heat flux at the stream surface.

In the Northern Hemisphere, the earth tilts on its axis toward the sun during summer months, allowing longer day length and higher solar altitude, both of which are functions of solar declination (i.e., a measure of the earth's tilt toward the sun) (Figure 5). Geographic position (i.e., latitude and longitude) fixes the stream to a position on the globe, while aspect provides the stream/riparian orientation (direction of stream flow). Near-stream vegetation height, width and density describe the physical barriers between the stream and sun that can attenuate and scatter incoming solar radiation (i.e., produce shade) (Table 5). The solar position has a vertical component (i.e., solar altitude) and a horizontal component (i.e., solar azimuth) that are both functions of time/date (i.e., solar declination) and the earth's rotation.

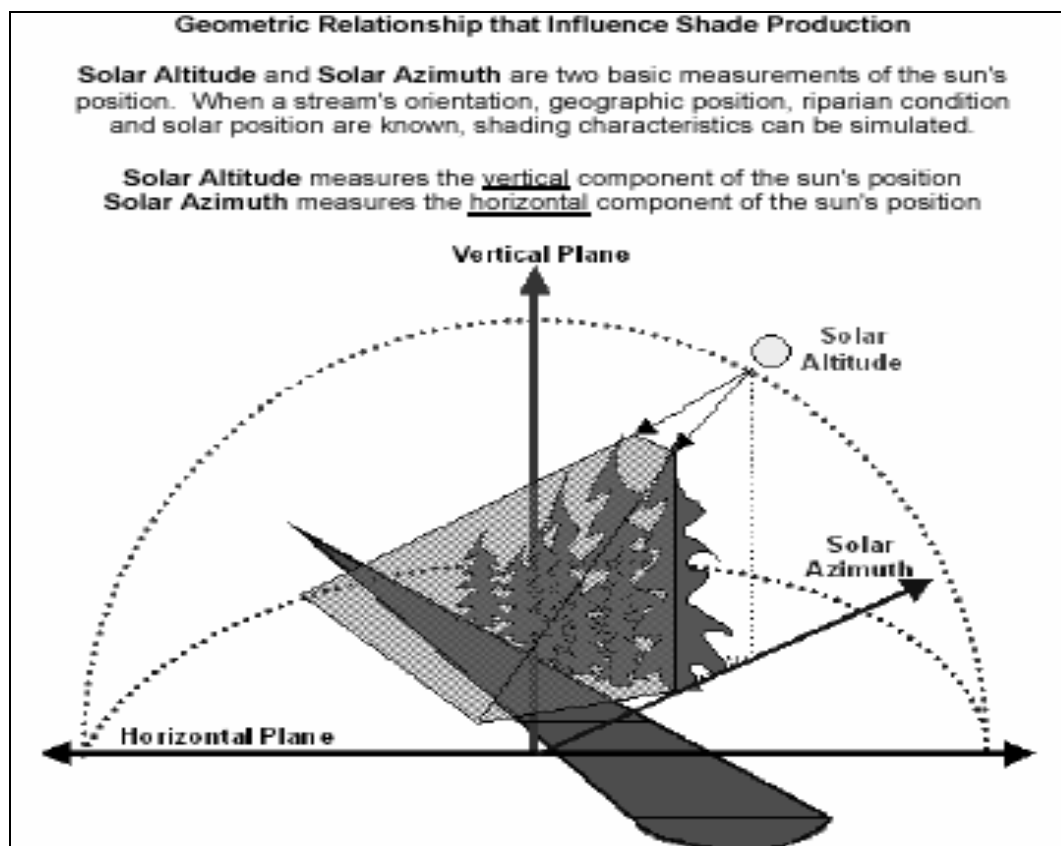


Figure 5. Parameters that affect shade and geometric relationships.

Table 2. Factors that influence stream shade (bold indicates influenced by human activities).

Description	Parameter
Season/time	Date/time
Stream characteristics	Aspect, channel width, depth, velocity
Geographic position	Latitude, longitude
Vegetative characteristics	Riparian vegetation height, width, and density
Solar position	Solar altitude, solar azimuth

While the interaction of these shade variables may seem complex, the mathematics that describes them is relatively straightforward geometry. Using solar tables or mathematical simulations, the potential daily solar load can be quantified. The shade from riparian vegetation can be measured with a variety of methods, including (Ice, 2001, OWEB, 1999, Teti, 2001):

- Hemispherical photography
- Angular canopy densiometer
- Solar pathfinder

Hemispherical photography is generally regarded as the most accurate method for measuring shade, although the equipment that is required is significantly more expensive compared with other methods. Angular canopy densiometers (ACD) provide a good balance of cost and

accuracy for measuring the importance of riparian vegetation for preventing increases in stream temperature (Teti, 2001, Beschta et al. 1987.) Whereas canopy density is usually expressed as a vertical projection of the canopy onto a horizontal surface, the ACD is a projection of the canopy measured at an angle above the horizon at which direct beam solar radiation passes through the canopy. This angle is typically determined by the position of the sun above the horizon during that portion of the day (usually between 10 A.M. and 2 P.M. in mid to late summer) when the potential solar heat flux is most significant. Typical values of the ACD for old-growth stands in western Oregon have been reported to range from 80% to 90%.

Computer programs for the mathematical simulation of shade may also be used to estimate shade (Ecology 2002, Chen, 1996, Chen et al., 1998, Boyd, 1996, and Park, 1993).

Riparian Buffers and Effective Shade

Tree retention in riparian areas provides shade to streams and minimizes undesirable water temperature changes (Brazier and Brown 1973; Steinblums et al. 1984). The shading effectiveness, as measured by the angular canopy density (ACD) of riparian vegetation can be correlated to riparian area width (Figure 6). Angular canopy densities for a given riparian buffer width varies over space and time because of differences among site potential vegetation, forest development stages (e.g., height and density), and stream width. For example, a 50-footwide riparian area with fully developed trees could provide from 45 to 72 percent of the potential shade in the two studies shown in Figure 6. The Brazier and Brown (1973) shade data show a stronger relationship between ACD and buffer strip width than the Steinblums et al. (1984) data—the r^2 correlation for ACD and buffer width was 0.87 and 0.61 in Brazier and Brown (1973) and Steinblums et al. (1984), respectively. This difference supports the use of the Brazier and Brown curve as a base for measuring shade effectiveness under various riparian buffer proposals. These results reflect the natural variation among old growth sites studied, and show a possible range of potential shade.

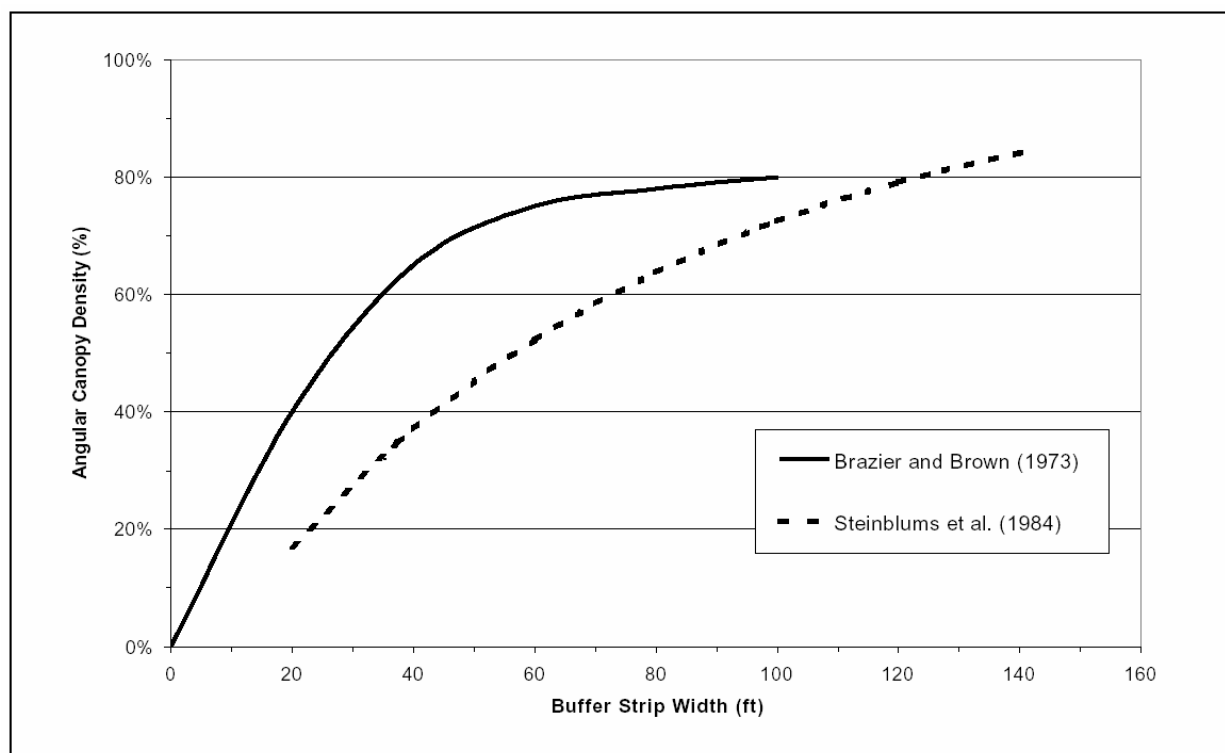


Figure 6. Relationship between angular canopy density and riparian buffer width for small streams in old-growth riparian stands (after Beschta et al. 1987 and CH2MHill 2000).

Several studies report that most of the potential shade comes from the riparian area within about 75 feet (23 m) of the channel (CH2MHill 2000, Castelle and Johnson 2000):

- Beschta et al. (1987) report that a 98-foot-wide (30-m) buffer provides the same level of shading as that of an old-growth stand.
- Brazier and Brown (1973) found that a 79-foot (24-m) buffer would provide maximum shade to streams.
- Steinblums et al. (1984) concluded that a 56-foot (17-m) buffer provides 90 percent of the maximum ACD.
- Corbett and Lynch (1985) concluded that a 39-foot (12-m) buffer should adequately protect small streams from large temperature changes following logging.
- Broderson (1973) reported that a 49-foot-wide (15-m) buffer provides 85 percent of the maximum shade for small streams.
- Lynch et al. (1985) found that a 98-foot-wide (30-m) buffer maintains water temperatures within 2°F (1°C) of their former average temperature.

GEI (2002) reviewed the scientific literature related to the effectiveness of buffers for shade protection in agricultural areas in Washington and concluded that buffer widths of 10 m (33 feet) provide nearly 80 percent of the maximum potential shade in agricultural areas. Wenger (1999) concluded that a minimum continuous buffer width of 10-30 m should be preserved or restored along each side of all streams on a municipal or county-wide scale to provide stream temperature control and maintain aquatic habitat. GEI (2002) considered the recommendations of Wenger (1999) to be relevant for agricultural areas in Washington.

Steinblums et al. (1984) found that shade could be delivered to streams from beyond 75 feet and potentially out to 140 feet. In some site-specific cases, forest practices between 75 and 140 feet from the channel have the potential to reduce shade delivery by up to 25 percent of maximum. However, any reduction in shade beyond 75 feet would probably be relatively low on the horizon, and the impact on stream heating would be relatively low because the potential solar radiation decreases significantly as solar elevation decreases.

Microclimate- Surrounding Thermal Environment

A secondary consequence of near stream vegetation is its effect on the riparian microclimate. Riparian corridors often produce a microclimate that surrounds the stream where cooler air temperatures, higher relative humidity and lower wind speeds are characteristic. Riparian microclimates tend to moderate daily air temperatures by decreasing daily maximum and increasing daily minimum air temperatures. Increases in relative humidity result from evapotranspiration that is occurring by riparian plant communities. Wind speed is reduced by the physical blockage produced by riparian vegetation.

Riparian buffers commonly occur on both side of the stream, compounding the edge influence on the microclimate. Brosfokske et al. (1997) reported that a buffer width of at least 150 feet (45 m) on each side of the stream was required to maintain a natural riparian microclimate environment in forests in western Washington with predominantly Douglas-fir and western hemlock. Ledwith (1996) recommended that a minimum buffer width of 30 m was required to avoid significantly altering the microclimate of a riparian zone.

Bartholow (2000) provided a thorough summary of literature of documented changes to the environment of streams and watersheds associated with extensive forest clearing. Changes summarized by Bartholow (2000) are representative of hot summer days and indicate the mean daily effect unless otherwise indicated:

- **Air temperature.** Edgerton and McConnell (1976) showed that removing all or a portion of the tree canopy resulted in cooler terrestrial air temperatures at night and warmer temperatures during the day, enough to influence thermal cover sought by elk (*Cervus canadensis*) on their eastern Oregon summer range. Increases in maximum air temperature varied from 5 to 7 degrees C for the hottest days (estimate). However, the mean daily air temperature did not appear to have changed substantially since the maximum temperatures were offset by almost equal changes to the minima. Similar temperatures have been commonly reported (Childs and Flint, 1987; Fowler et al., 1987), even with extensive clearcuts (Holtby, 1988). In an evaluation of buffer strip width, Brosfokske et al. (1997) found that air temperatures immediately adjacent to the ground increased 4.5 degrees C during the day and about 0.5 degrees C at night (estimate). Fowler and Anderson (1987) measured a 0.9 degrees C air temperature increase in clearcut areas, but temperatures were also 3 degrees C higher in the adjacent forest. Chen et al. (1993) found similar (2.1 degrees C) increases. All measurements reported here were made over land instead of water, but in aggregate support about a 2 degrees C increase in ambient mean daily air temperature resulting from extensive clearcutting.

- **Relative humidity.** Brosofske et al. (1997) examined changes in relative humidity within 17 to 72 m buffer strips. The focus of their study was to document changes along the gradient from forested to clearcut areas, so they did not explicitly report pre- to post-harvest changes at the stream. However, there appeared to be a reduction in relative humidity at the stream of 7% during the day and 6% at night (estimate). Relative humidity at stream sites increased exponentially with buffer width. Similarly, a study by Chen et al. (1993) showed a decrease of about 11% in mean daily relative humidity on clear days at the edges of clearcuts.
- **Wind speed.** Brosofske et al. (1997) reported almost no change in wind speed at stream locations within buffer strips adjacent to clearcuts. Speeds quickly approached upland conditions toward the edges of the buffers, with an indication that wind actually increased substantially at distances of about 15 m from the edge of the strip, and then declined farther upslope to pre-harvest conditions. Chen et al. (1993) documented increases in both peak and steady winds in clearcut areas; increments ranged from 0.7 to 1.2 m/s (estimated).

Chen (1991) reported that soil and air temperatures, relative wind speed, humidity, soil moisture, and solar radiation all changed with increasing distance from clear-cut edges in upslope forests of the western Cascades. Based on Chen's results, FEMAT (1993) concluded that loss of upland forests likely influences conditions within the riparian zone. FEMAT also suggested that riparian buffers necessary for maintaining riparian microclimates need to be wider than those for protecting other riparian functions (Figure 7).

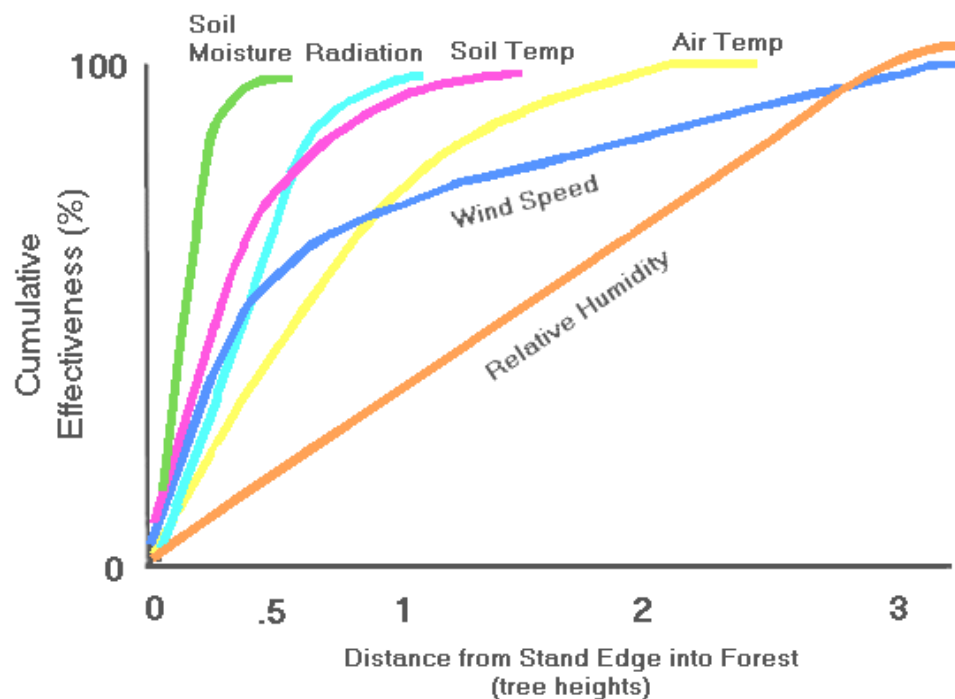


Figure 7. Riparian buffer effects on microclimate (FEMAT 1993).

Thermal Role of Channel Morphology

Channel widening (increased width to depth ratios) increases the stream surface area exposed to heat energy processes. In addition, wide channels are likely to have decreased levels of shade due to the increased distance created between vegetation and the wetted channel. Conversely, narrow channels are more likely to experience higher levels of shade. Riparian vegetation contributes to channel stability by increasing roughness and dissipating the erosive energies of higher flows.

Channel widening is often related to degraded riparian conditions that allow increased stream bank erosion and sedimentation of the streambed, both of which correlate strongly with riparian vegetation type and condition (Rosgen 1996). Channel morphology is not solely dependent on riparian conditions. Sedimentation can deposit material in the channel, fill pools and aggrade the streambed, reducing channel depth and increasing channel width.

Channel modification usually occurs during high flow events. Land uses that affect the magnitude and timing of high flow events may negatively impact channel width and depth. Riparian vegetation conditions will affect the resilience of the stream banks/flood plain during periods of sediment introduction and high flow. Disturbance processes may have differing results depending on the ability of riparian vegetation to shape and protect channels. Channel morphology is related to riparian vegetation composition and condition by:

- **Building stream banks:** Trap suspended sediments, encourage deposition of sediment in the flood plain and reduce incoming sources of sediment.
- **Maintaining stable stream banks:** High rooting strength and high stream bank and flood plain roughness prevent stream bank erosion.
- **Reducing flow velocity (erosive kinetic energy):** Supplying large woody debris to the active channel, high pool:riffle ratios and adding channel complexity that reduces shear stress exposure to stream bank soil particles.

Channel straightening, diking, and dredging are all undertaken to prevent the lateral movement of stream channels and increase channel efficiency. These activities focus the erosive energy of streams toward the middle of the channel, encouraging downcutting (National Research Council 1996), and ultimately decreasing the interaction of stream channels with their floodplain in all but extreme flood events. This loss of connectivity between the channel and floodplain can occur through one or all of the following mechanisms:

- Since engineered channels carry water more efficiently, both the amount of time floodwaters spend on the floodplain and the surface area inundated is reduced during average annual high-flow events. This action reduces the opportunity for floodwaters to penetrate the alluvial aquifer and, in turn, decreases baseflow by reducing groundwater discharge during the low flow season (Seiger et al 1998).

- Engineered channels reduce the heterogeneity in channel pattern and topography, thereby reducing hyporheic flow (Jurajda 1995).

In summary, channel modifications sever the linkages between the channel and the floodplain thereby reducing groundwater buffering of stream flow and temperature (Ward 1998) as well as eliminating interactions between the channel and riparian zone that would insulate the stream from exchange of heat with the atmosphere.

Water Withdrawals and Stream Temperature

Water withdrawals reduce instream flow and therefore reduce the assimilative capacity of streams (Dauble 1994). Although some of this water is eventually returned to the stream, the fraction is typically low. Solley et al. (1993) estimated that only approximately one-third of the water withdrawn in the Pacific Northwest was returned to lakes and streams. Additionally, water withdrawn from the river or stream is often at a markedly different temperature than it was when withdrawn, thereby affecting the heat load to the stream. Water withdrawals in the Skagit River study area are typically used for agriculture with maximum withdrawals occurring during the hottest summer months.

Reductions in instream flows can also reduce the magnitude of hyporheic flow. For hyporheic flow to act as a temperature buffer, differential storage of heat and water over time must occur. Differential heat and water storage is driven by variations in stream temperature and flow. Since flow regulation dampens variation in both flow and temperature, the potential for hyporheic exchange to act as a temperature buffer is reduced by flow regulation (Poole et al. 2000).

Summary of the Pathways of Human Influence on Stream Temperature

Riparian vegetation, stream morphology, hydrology, climate, and geographic location all influence stream temperatures. While climate and geographic location are outside of human control, riparian condition, channel morphology and hydrology are affected by human activities.

Human activities can affect water temperature in stream channels by changing the timing or magnitude of a) the amount of heat delivered to the channel, or b) amount of water delivered to the channel (flow regime). Figure 8 summarizes the web of pathways by which temperature may be increased in stream channels.

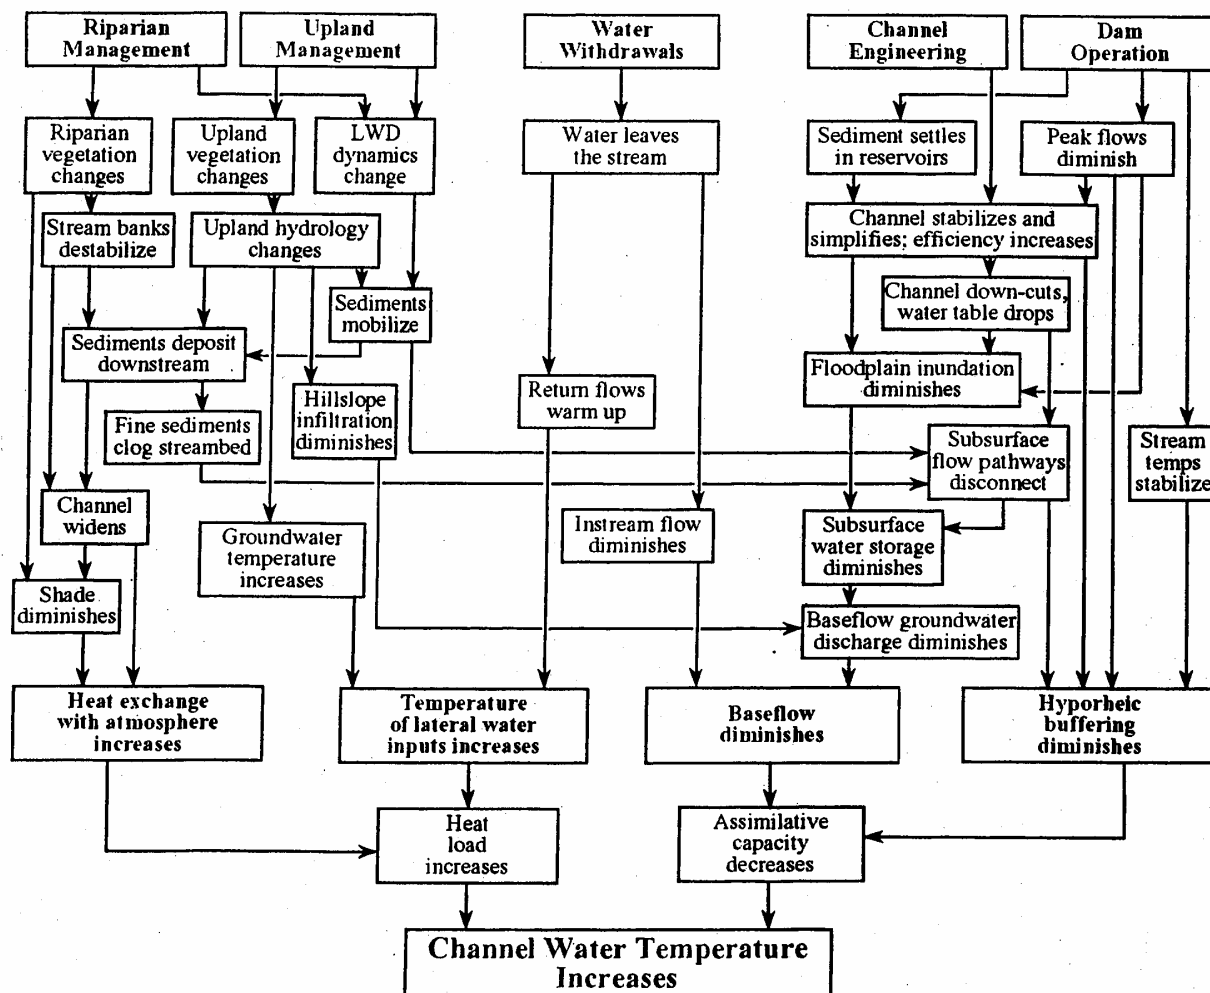


Figure 8. Pathways of human influence on water temperatures in stream channels (Poole et al. 2000).

Pollutants and Surrogate Measures

Heat loads to the stream are calculated in this TMDL in units of calories per square centimeter per day or watts per square meter. However, heat loads are of limited value in guiding management activities needed to solve identified water quality problems.

The lower Skagit River tributaries temperature TMDL incorporates measures other than “daily loads” to fulfill the requirements of Section 303(d). This TMDL allocates other appropriate measures, or “surrogate measures” as provided under EPA regulations [40 CFR 130.2(i)]. The “Report of the Federal Advisory Committee on the Total Maximum Daily Load (TMDL) Program” (EPA, 1998) includes the following guidance on the use of surrogate measures for TMDL development:

“When the impairment is tied to a pollutant for which a numeric criterion is not possible, or where the impairment is identified but cannot be attributed to a single traditional “pollutant,” the state should try to identify another (surrogate) environmental indicator that can be used to develop a quantified TMDL, using numeric analytical techniques where they are available, and best professional judgment (BPJ) where they are not.”

This technical assessment for the lower Skagit River tributaries temperature TMDL uses riparian shade as a surrogate measure of heat flux to fulfill the requirements of Section 303(d). Effective shade is defined as the fraction of the potential solar shortwave radiation that is blocked by vegetation and topography before it reaches the stream surface. Effective shade accounts for the interception of solar radiation by vegetation and topography.

A decrease in shade due to inadequate riparian vegetation causes an increase in solar radiation and thermal load upon the affected stream section. Other factors influencing the distribution of the solar heat load were also considered, including changes in the width to depth ratios.

Channel width is only evaluated in this TMDL as a function of stream effective shade production. It is expected that factors and efforts associated with site potential riparian vegetation will promote channel recovery by increasing channel complexity via large woody debris and decreasing channel widths via decreased sediment from upstream erosion and increased resistance to erosion.

Background

The Skagit River basin covers most of Skagit County and the northeastern and eastern parts of Snohomish and Whatcom Counties, respectively, and extends northward into Canada. The basin encompasses a total of about 6,138 km² (2,370 mi²). The Skagit River originates in British Columbia, flows through Ross Lake, which extends a short distance across the international boundary, and continues in a southwestward path to empty into Skagit Bay below Mount Vernon. The river contributes approximately one-third of the total freshwater discharge to Puget Sound.

The major sub-basins in the Skagit River are: The Upper Skagit, Baker, Cascade, Sauk, and Lower Skagit. Carpenter, Turner, Otter Pond, Red, Fisher, Hansen, Lake, Nookachamps, and East Fork Nookachamps creeks are all temperature-impaired tributaries to the Skagit River in the 520km² of the Lower Skagit basin (Figure 1).

The Lower Skagit River, its tributaries, sloughs, and estuaries serve as important migration corridors, spawning areas, and rearing areas for five major species of salmon (Chinook, coho, pink, chum, and sockeye), as well as steelhead and cutthroat trout (Entranco 1993). The Skagit River watershed contains the second largest wild run of coho salmon and the largest run of chinook salmon in the Puget Sound watershed.

The climate in the lower Skagit basin is mild with cool dry summers and mild wet winters. Mean annual precipitation ranges from 71 to 107 cm per year, increasing from west to east (NOAA 1973). The majority of annual precipitation occurs between October and March.

Small farms and rural residential development dominate the lowland portion of the basin. Agricultural land use dominates in the western portion of the basin, largely supporting cropland and pasture. The eastern uplands are predominantly forestland, with some scattered residential development. An extensive drainage network exists in the agricultural portions of the study area and many of the waterbodies addressed in this study have been diked, dredged, or otherwise channelized. This has resulted in extensive segments with little or no riparian vegetation.

Lower elevation forests (< 700m) are within the western hemlock zone (Franklin and Dyrness 1973). Dominant conifer species in these forests are western hemlock, Douglas-fir, western red cedar, and Sitka spruce. Deciduous trees include Red alder, black cottonwood, and bigleaf maple. Middle elevation forests (700-1300m) are in the silver fir zone.

The Study Area

Carpenter-Fisher Creek Sub-basin

The Carpenter Creek and Fisher Creek drainages are located in southern Skagit County, southeast of the city of Mt. Vernon, with a small portion covering northern Snohomish County. The basin topography ranges from a flat-lying alluvial plain (Skagit plain) in the westernmost

portion of the basin, low rolling hills to the south (lowland), and rugged upland foothills to the east and northeast (uplands). Basin surface elevations range between approximately 2 and 520 meters above mean sea level.

The Carpenter Creek mainstem occupies the northern half of the basin, draining towards the south. The portion of the Carpenter Creek mainstem that flows across the Skagit plain has been diked and channelized adjacent to the base of the uplands, and is also known as Hill Ditch. Hill Ditch is maintained by Skagit County Dike District #3. Tributaries feeding both mainstem Carpenter Creek and Hill Ditch drain largely from the east.

The Fisher Creek mainstem drains towards the northwest and is fed by several smaller tributaries that drain the lower elevation hills of the southern and southeastern lowlands. Fisher Creek flows through alternating sections of forest and agricultural lands.

The confluence of Fisher and Carpenter creeks is located approximately 0.8 km east of the South Fork of the Skagit River. The combined drainage area for the two creek systems is approximately 65 km². Those portions of the drainage area with an elevation less than the local mean high water mark may be routinely influenced by the tide (Pitz et al. 2000).

Land use in the Carpenter-Fisher basin consists mostly of a mixture of rural and agricultural uses. Agricultural uses include dairy farming operations, small farm and other livestock operations, and some pastureland.

Hansen Creek Sub-basin

The Hansen Creek watershed lies in northwestern Skagit County, draining an area of approximately 35 km² and flowing from its headwaters in the Lyman Hill area south to its confluence with the Skagit River near Sedro Woolley. Red Creek is the major tributary to Hansen Creek with several smaller tributaries entering just above the Northern State Recreation Area.

Land use in the Hansen Creek watershed consists mostly of a mixture of forestry, rural, and agricultural uses. Agricultural uses include dairy farming operations, small farm and other livestock operations, and some pastureland. Timber extraction occurs in the upper reaches of the watershed and is most concentrated in the Lyman Hill area.

The headwater sections of Hansen Creek have been extensively logged and large amounts of sediment from landslides have filled in the lower portions of the creek. The watershed is forested from just below Lyman Hill to the Northern State Recreational Area, the remainder of Hansen Creek flows through extensive areas with little or no riparian vegetation. Long-term dredging has resulted in the creek's thalweg becoming raised above the level of the surrounding ground and contained within dredge spoils that act as small dikes, allowing little opportunity for surface water to drain back into the creek during flood events.

Historically, the Hansen Creek Watershed was utilized by large numbers of several salmon species, including Puget Sound Chinook, and Bull Trout, both currently listed as "threatened"

under the Endangered Species Act. The Watershed still supports salmon runs; however the runs are greatly reduced from historic numbers, in part from lack of woody debris and associated pools for refuge, lack of sufficient riparian cover to provide shade, increased sediment load from upstream sources, and decreased floodplain and wetland areas.

Nookachamps Creek Sub-basin

The Nookachamps Creek watershed is located in south central Skagit County and drains approximately 210 km², making it the largest sub-basin in the study area. High elevations and rugged terrain border the Nookachamps basin on both the east and west sides, while the northern boundary of the watershed is defined by almost 14 miles of the Skagit River. Devils Mountain to the west divides the Nookachamps Watershed from the Carpenter-Fisher Creek drainage. Through the Nookachamps Valley, elevations range from 48 m at Lake McMurray to approximately 15 m at the Skagit River. Surface waters in the watershed include approximately 320 kilometers of creeks and streams, including Lake Creek, East Fork Nookachamps Creek, Turner Creek, and Otter Pond Creek.

Lake Creek flows from the outlet of Lake McMurray south to Big Lake. Water from Big Lake discharges into Nookachamps Creek, which flows approximately 11 km through mostly agricultural lands, before confluenting with the Skagit River midway between the cities of Mount Vernon and Sedro Woolley. Nookachamps Creek forks near Barney Lake just south of the mainstem Skagit River. This branch, referred to as the East Fork of Nookachamps Creek, is formed by tributary streams descending from Cultus Mountain. The main tributaries to East Fork Nookachamps Creek are Day Creek, Turner Creek, Mundt Creek, and Walker Creek.

Most of the Nookachamps Creek watershed supports forestry (14,500 ha) and agriculture (3,640 ha) (Skagit County Dept. of Planning 1995)- Forest lands account for almost 70% of the total watershed area with approximately 4860 ha owned and managed by the Washington State Department of Natural Resources (DNR). The remaining forest land, approximately 9800 ha, are privately owned. Timber harvesting on both private and state owned forest land is subject to the rules and regulations set forth by the Forests and Fish report, discussed later in this report.

Agricultural uses are found mostly throughout the floor of the Nookachamps Valley from Lake McMurray to the Skagit River. The majority of the lower sections of both Nookachamps Creek and East Fork Nookachamps creek have been extensively channelized and diked. The only urbanized area is the City of Mount Vernon, located in the northwest corner of the watershed.

The Nookachamps Creek watershed has been identified as the first important salmon-producing tributary in the Skagit River, and a key habitat for a successful wild Coho stock (Skagit County Dept. of Planning 1995).

Land Use in the Study Area

Land use in the study area as a whole is a mixture of agriculture, urban, suburban, and forestland (Figure 9). Digital orthophotos (Figures 10- 12) show the matrix of land uses in each sub-basin. These images provide a good perspective of stream temperature issues within the study area, as they relate to land use- specifically riparian shade. Stream segments lacking substantial riparian areas or those reaches that have been diked or channelized are clearly visible.

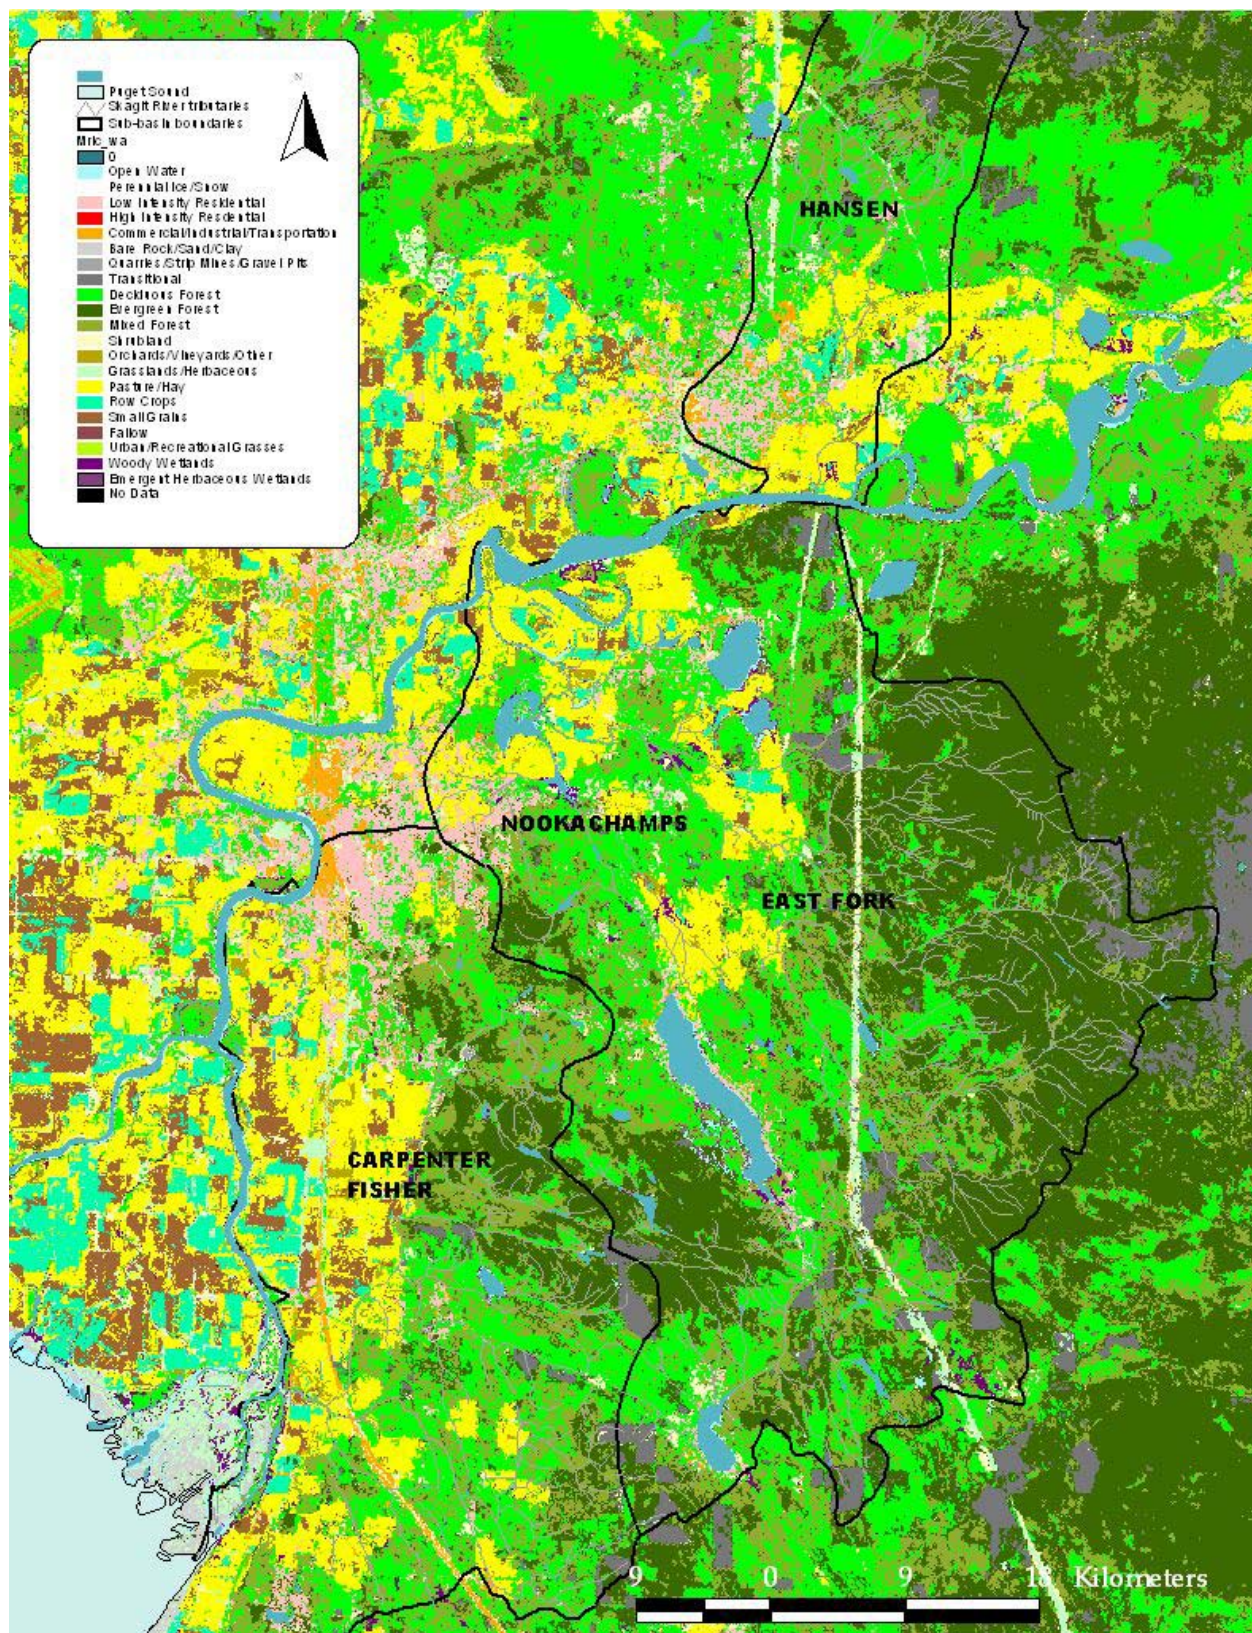


Figure 9. Generalized land use within the study area.



Figure 10. Landstat image of Carpenter and Fisher Creek study area showing a matrix of land uses.



Figure 11. Landstat image of Hansen Creek sub basin showing a matrix of land uses.



Figure 12. Landstat image of Nookachamps sub basin showing a matrix of land uses.

Fisheries Resources

Fisheries resources in the study area include both anadromous and resident fish. Table 3 shows the stream type classifications for streams in the study area. Stream type classifications are designated by the Washington Department of Natural Resources. All stream types designated as 1-3 are available for the migration, rearing, and spawning of anadromous fish, while stream types designated as 1-4 provide for the access of resident fish.

Table 3. Stream Type Classifications in lower Skagit River study area.

Stream Name	Stream Type *
Carpenter Creek	2
Fisher Creek	2
Hansen Creek	2
Red Creek	3
Lake Creek	1,2
Otter Pond Creek	3
Nookachamps Creek	1
East Fork Nookachamps Creek	1,2,3,4
Turner Creek	3,4

* Stream Type in bold indicates stream type of modeled segment.

Type 1- All waters inventoried as "Shorelines of the State"

Type 2- Surface waters which: 1) are used for domestic by more than 100 residential or camping units; 2) used by substantial numbers of anadromous fish for spawning, rearing, and migration in segments >20 ft in width with a gradient less than 4% or impoundments of water >1 acre at low seasonal flow.

Type 3- Surface waters which are used for domestic use by 10-100 residential or camping units or are used by anadromous fish for rearing, spawning, and migration in streams 5 to 20 feet in width and impoundments with anadromous access less than an acre during dry flow season.

Type 4- Streams 2 to 5 feet in width which are not used by anadromous fish.

The Nookachamps system, which includes the East Fork, Lake Creek, Otter Pond Creek, and Turner Creek produces several species of anadromous fish, including coho salmon, chum salmon, chinook salmon, pink salmon, steelhead trout, a small run of sockeye salmon, and sea-run cutthroat trout (Skagit County Dept. of Planning 1995). The most successful anadromous species in the watershed is coho salmon, which is able to utilize most of the stream systems within the study area. The Nookachamps Creek watershed is a good producer of steelhead and cutthroat trout (Skagit County Dept. of Planning 1995).

The remainder of the creeks within the study area also produce, to varying degrees, several species of anadromous fish, including coho salmon, chum salmon, chinook salmon, pink salmon, steelhead trout, and sea-run cutthroat trout.

In addition to anadromous resources, streams within the study area also support a variety of resident fish, including rainbow trout, cutthroat trout, bass, perch, crappie, brown trout, bullhead,

sculpin, lamprey, and whitefish. Historically, the Nookachamps Creek was recognized nationwide for its cutthroat sport fishing but the current numbers produced have diminished.

Salmonid Stream Temperature Requirements

Many Pacific salmon (*Oncorhynchus spp.*) stocks in the Pacific Northwest are currently listed under the Endangered Species Act because of dramatic population declines in the past few decades. The causes of decline are many and vary within different watersheds, however virtually all declines are at least partly attributed to changes in freshwater habitat conditions (Spence et al. 1996). In many watersheds, habitat and fishery managers view increases in summer maximum stream temperature as a significant source of mortality for juveniles during their freshwater life history stages (Hicks et al. 1991).

Water temperature plays an important role in regulating biological and ecological processes in aquatic systems. Virtually all biological and ecological processes are affected by ambient water temperature. Below is a list of some of the more important physiological and ecological processes affected by temperature (Spence et al. 1996).

- Decomposition of organic materials
- Metabolism of aquatic organisms, including fishes
- Food requirements, appetite, and digestion rates of fishes
- Growth rates of fish
- Developmental rates of embryos and alevins
- Timing of life-history events including adult migrations, fry emergence, and smoltification
- Competitor and predator-prey interactions
- Disease-host and parasite-host relationships
- Development rate and life history of aquatic invertebrates

Salmonids use a variety of habitats during their life histories. Anadromous species in particular have complex life histories that involve periodic shifts in habitat (Spence et al. 1996).

Depending on the species or stock, freshwater streams, lakes, or intertidal sloughs may be used for reproduction; streams, lakes, estuaries, or oceans may be used for juvenile rearing. For all anadromous species, habitats between spawning streams and the ocean are required for upstream and downstream migrations. Differences in spatial and temporal use of specific habitats exist for each species, yet the diversity among species and by life stage indicates that most freshwater habitats are utilized year round (Spence et al. 1996). To persist, each species or stock must be able to survive within the entire range of habitats encountered during its life; degradation or alteration of habitat required at any life stage can limit production. Much of the available information on salmonid habitat requirements has been summarized in reviews by Bell (1986), Everest et al. (1985), and Bjornn and Reiser (1991). A brief summary of the importance of water temperatures to salmonids during adult migration, spawning and incubation, and juvenile and adult rearing is provided below. Table 4 provides a summary of tolerable and preferred temperature ranges for adult migration, spawning, and incubation of native salmonids. An extensive review of studies examining the temperature requirements of salmonid species during specific life histories is provided by Hicks (2001).

Adult Migration

Most adult salmonids typically migrate at temperatures less than 14°C; however, summer and fall chinook salmon migrate during periods when temperatures are substantially warmer (Spence et al. 1996). Excessively high or low temperatures may result in delays in migration (Major and Mighell 1966; Hallock et al. 1970; Monan et al. 1975). Adult steelhead that move from the ocean into river systems in the summer and fall may overwinter in larger rivers, delaying entry into smaller spawning tributaries until they are free of ice in the spring. Similarly, spring-spawning resident salmonids, including cutthroat and rainbow trout, may hold at the mouths of spawning streams until temperatures warm up to the preferred temperature range (Bjornn and Reiser 1991). In addition to delaying migration, excessively high temperatures during migration may cause outbreaks of disease.

Table 4. Tolerable and preferred temperature ranges (°C) for adult migration, spawning, and incubation of embryos for native salmonids in the Pacific Northwest (Bjornn and Reiser 1991).

Species	Life Stage		
	Spawning Migration (min - max)	Spawning (preferred range)	Incubation (preferred range)
<i>ANADROMOUS</i>			
Pink salmon	7.2 - 15.6*	7.2 - 12.8*	4.4 - 13.3*
Chum salmon	8.3 - 15.6*	7.2 - 12.8*	4.4 - 13.3*
Coho salmon	7.2 - 15.6*	4.4 - 9.4*	4.4 - 13.3*
Sockeye salmon	7.2 - 15.6*	10.6 - 12.2*	4.4 - 13.3*
Spring chinook	3.3 - 13.3*	5.6 - 13.9*	5.0 - 14.4*
Summer chinook	13.9 - 20.0*	5.6 - 13.9*	5.0 - 14.4*
Fall chinook	10.6 - 19.4*	5.6 - 13.9*	5.0 - 14.4*
Steelhead trout		3.9 - 9.4*	
Cutthroat trout		6.1 - 17.2*	
<i>RESIDENT</i>			
Kokanee		5.0 - 12.8*	
Mountain whitefish		0.0 - 5.6†	
Cutthroat trout	5.0 - 10.0	4.4 - 12.8† 5.5 - 15.5‡	
Rainbow trout		2.2 - 20.0* 4.4 - 12.8†	
Dolly Varden		7.8†	
Bull trout		< 9.0§ 4.5	2.0 - 6.0§

* Bell 1986.

† Everest et al. 1985.

‡ Varley & Gresswell 1988.

§ Pratt 1992.

¶ Ratliff 1992.

Spawning

Salmonids have been observed to spawn at temperatures ranging from 1-20°C (Bjornn and Reiser 1991), but most spawning occurs at temperatures between 4 and 14°C (Table 2). Resident trout, including rainbow and cutthroat trout, may spawn at temperatures up to 20.0°C and 17.2°C, respectively, while coho salmon, steelhead trout, Dolly Varden, bull trout, and mountain whitefish tend to prefer lower temperatures. The wide range of spawning temperatures utilized by most salmonid species strongly suggests that adaptation has allowed salmonids to persist in a variety of thermal environments and that attempting to identify species-specific preferenda may fail to account for ecological requirements of individual stocks (Spence et al. 1996).

Juvenile and Adult Rearing

Juvenile and resident salmonids are variable in their temperature requirements, though most species are at risk when temperatures exceed 23-25°C (Bjornn and Reiser 1991). Upper and lower lethal temperatures as well as the "preferred" temperature ranges of several western salmonids is shown in Table 5. These values provide a general range of tolerable temperatures; however, the ability of fish to tolerate temperature extremes depends on their recent thermal history (Spence et al 1996).

Table 5. Lower lethal, upper lethal, and preferred temperatures for selected salmonids. Based on techniques to determine incipient lethal temperatures (ILT) and critical thermal maxima (CTM). From Bjornn and Reiser (1991).

Species	Lethal temperature (C)		Preferred temperature (°C)	Technique	Source
	Lower lethal*	Upper lethal†			
Chinook salmon	0.8	26.2	12- 14	ILT	Brett (1952)
Coho salmon	1.7	26.0 28.8‡	12- 14	ILT CTM	Brett (1952) Becker and Genoway (1979)
Sockeye salmon	3.1	25.8	12- 14	ILT	Brett (1952)
Chum salmon	0.5	25.4	12- 14	ILT	Brett (1952)
Steelhead trout	0.0	23.9	10- 13		Bell (1986)
Rainbow trout		29.4 25.0		CTM ILT	Lee & Rinne (1980) Charlon et al. (1970)
Cutthroat trout	0.6	22.8			Bell (1986)

* Acclimation temperature was 10°C; no mortality occurred in 5,500 min.

† Acclimation temperature was 20°C unless noted otherwise; 50% mortality occurred in 1,000 min.

‡ Acclimation temperature was 15°C.

If stream temperatures become too hot, fish die almost instantaneously due to denaturing of critical enzymes in their bodies (Hogan 1970). The ultimate *instantaneous lethal limit* occurs in

high temperature ranges (above 32°C). Such warm temperature extremes may never occur in the lower Skagit River tributaries. More common and widespread within the lower Skagit River tributaries, however, is the occurrence of temperatures in the mid to high 20°C range. These temperatures cause death of cold water fish species during exposure times lasting a few hours to one day. The exact temperature at which a cold water fish succumbs to such a thermal stress depends on the temperature that the fish is acclimated to, and on life-stage of development. Table 6 summarizes the modes of cold water fish mortality.

Table 6. Modes of Thermally Induced Cold Water Fish Mortality (from Brett 1952, Bell 1986, and Hokanson et al. 1977).

Modes of Thermally Induced Fish Mortality	Temperature Range (°C)	Time to Death
<i>Instantaneous Lethal Limit</i> - Denaturing of bodily enzyme systems	> 32°C	Instantaneous
<i>Incipient Lethal Limit</i> - Breakdown of physiological regulation of vital bodily processes, namely: respiration and circulation	21°C - 25°C	Hours to Days
<i>Sub-Lethal Limit</i> - Conditions that cause decreased or lack of metabolic energy for feeding, growth or reproductive behavior, encourage increased exposure to pathogens, decreased food supply and increased competition from warm water tolerant species	20°C - 23°C	Weeks to Months

Protection and restoration of salmonid habitats requires that water temperatures in streams and lakes remain within the natural range for the particular site and season. Although “natural” temperature ranges may vary, the current water quality standards for temperature are intended to maintain the long-term health of fish and other aquatic life. Temperature standards exist to ensure the protection of entire communities of aquatic life and to the extent consistent with this goal, avoid unnecessary impact on human economic activities.

A study by Ecology (Hicks 2001) included a comprehensive review of the available technical literature on the temperature requirements of native fish and aquatic life. The author makes recommendations for expanding the existing state water quality standards for temperature to ensure the protection of the key life-stages of adult holding, spawning and incubation, juvenile rearing, smoltification, and adult migration. The proposed criteria have also been set to avoid significant increases in the risks of warm water fish diseases and parasites, and include recommendations to avoid acute lethality from wastewater plumes.

Associated with the proposed criteria are directives on how to properly implement the criteria. The recommended criteria have been set at values representing the full protection for the species and their key life-stages. The proposed metrics express the criteria (typically both a 21-day average or the daily average temperatures, and a 7-day average of the daily maximum temperatures) were chosen to better match with laboratory and field research results that were used as the basis for the recommendations.

Instream Flows in the Lower Skagit River

Streamflow is a significant factor in the heat budget of lotic systems. Human-related reductions in flow volume can have a significant influence on stream temperature dynamics, most likely by increasing the diurnal variability in stream temperature. Lower stream flows also decrease hyporheic exchange between the alluvial aquifer and the channel. It follows then, that water resource policy should ensure that instream flows be maintained such that biological communities are protected, while still allowing for consumptive uses.

Instream flows and water withdrawals are managed through regulatory avenues separate from TMDLs. However, stream temperature is related to the amount of instream flow, and increases in flow generally result in decreases in maximum temperatures. The complete heat budget for a stream segment accounts for the amount of flow and the temperature of water flowing into and out of the stream. The primary statutes relating to flow setting in the State of Washington are as follows:

- Water Code, Chapter 90.03 RCW (1917), in section 247, describes Ecology's exclusive authority for setting flows and describes specific conditions on permits stating where flows must be met. It requires consultation with the Department of Fish and Wildlife, the Department of Community, Trade, and Economic Development, the Department of Agriculture, as well as affected Indian Tribes on the establishment of "minimum flows".
- Construction Projects in State Waters, Chapter 77.55 RCW (formerly 75.20)(1949), section 050, requires Ecology to consult with the Department of Fish and Wildlife prior to making a decision on any water right application that may affect flows for food and game fish. Fish and Wildlife may recommend denial or conditioning of a water right permit.
- Minimum Water Flows and Levels Act, Chapter 90.22 RCW (1967), set forth a process for protecting instream flows through adoption of rules. Among other provisions, it says Ecology must consult with the Department of Fish and Wildlife and conduct public hearings.
- Water Resources Act of 1971, Chapter 90.54 RCW, particularly section 020, includes language that says "base flows" are to be retained in streams except where there are "overriding considerations of the public interest". Further, waters of the state are to be protected and utilized for the greatest benefit to the people, and water allocation is to be generally based on the securing of "maximum net benefits" to the people of the state. This Act also authorizes Ecology to reserve waters for future beneficial uses.
- In 1998, the legislature passed Engrossed Substitute House Bill 2514, which was codified as "Watershed Planning," Chapter 90.82 RCW. This chapter provides an avenue for local citizens and various levels of governments to be involved in collaborative water management, including the option of establishing or amending instream flow rules. The Watershed Planning process specifies that local watershed planning groups can recommend instream flows to Ecology for rule-making, and directs Ecology to undertake rule making to adopt flows upon receiving such a recommendation.

Under state laws, the Washington Department of Ecology oversees both the appropriation of water for out-of-stream uses (e.g. irrigation, municipalities, commercial and industrial uses) and the protection of instream uses (e.g. water for fish habitat and recreational use). Ecology does this by adopting and enforcing regulations, as well as by providing assistance to citizens regarding both public and private water management issues.

Ecology is required by law to protect instream flows by adopting regulations and to manage water uses that affect stream flow. To develop an “instream flow rule” which sets for a particular stream the minimum flows needed during critical times of year, Ecology considers existing flow data, the hydrology of a stream and its natural seasonal flow variation, fish habitat needs, and other factors. Once adopted, an instream flow rule acquires a priority date similar to that associated with a water right. Water rights existing at the time an instream flow rule is adopted are unaffected by the rule and those issued after rule adoption are subject to the requirements of the rule.

The Watershed Planning Process is expected to address flows in the lower Skagit River tributaries including those tributaries addressed by this TMDL. Upon recommendation by the Washington State Department of Fish and Wildlife, Carpenter Creek and Nookachamps Creek are closed to further appropriations. Skagit County has adopted these closures under Section 14.24.350 of the Critical Areas Ordinance, which the county developed under the directives of the Growth Management Act.

The rule making process is expected to take several years; it will involve data collection, modeling and analysis as well as consultation with other natural resource agencies and affected Tribes, to obtain their recommendations. A draft instream flow regulation will be distributed for public and agency review and revision prior to any Ecology decision to adopt the rule.

Water Withdrawals

Withdrawal of water from a stream is an important consideration for the instream flow and heat budget. Actual water withdrawals at any given time from streams in the lower Skagit River study area are not known, but information from the Water Rights Application Tracking database system (WRAT) was used as an indicator of the amounts of water that may be withdrawn. The water quantity potentially withdrawn from surface waters for consumptive use is about 0.90 cms and 1.3 cms from non-consumptive uses (Table 7). Irrigation represents the majority of the consumptive withdrawal from surface waters.

Table 7. Summary of consumptive water rights in the lower Skagit River tributaries

Tributaries	Consumptive Surface Withdrawals in cms	Non Consumptive Surface Withdrawals in cms
Consumptive surface withdrawals		
Carpenter-Fisher Creek	0.06	0.120
Hansen Creek	0.01	unknown
Nookachamps Creek	0.36	0.001
East Fork Nookachamps Creek	0.47	1.150
TOTAL	0.90	1.3

Stakeholders and Key Projects in the Study Area

Washington State Conservation Commission

The Washington State Conservation Commission was created in 1939 with the passage of Chapter 89.08 Revised Code of Washington, more commonly known as the Conservation Districts Law. The Conservation Commission exists to assist and guide conservation districts in protecting, conserving and enhancing the natural resources of the state of Washington. The Commission provides leadership, partnerships and resources to support locally governed conservation districts in promoting conservation stewardship by all. The Commission takes an active role in the development and implementation of state policies. The Conservation Commission manages multiple conservation programs, which are discussed below.

Ag, Fish and Water (AFW)

The Governor's Statewide Salmon Recovery Strategy calls for the development of conservation practice standards for use by farmers to provide appropriate levels of resource protection. This is part of the state's effort to restore the habitat functions needed by salmon to meet recovery goals under the federal Endangered Species Act (ESA). The basis of these practice standards is the Field Office Technical Guides (FOTGs) developed by the USDA Natural Resource Conservation Service (NRCS).

In 1998 Washington State entered into a Memorandum of Understanding (MOU) with NRCS, National Marine Fisheries Service (NMFS), the Environmental Protection Agency (EPA), and US Fish & Wildlife Service (USFWS) to update the FOTGs, to comply with the ESA. It is also hoped that the revised FOTGs will meet the Clean Water Act (CWA) standards as well, giving farmers certainty on both issues.

This MOU was the vehicle used to negotiate the Riparian Forest Buffer Standards currently used for the Conservation Reserve Enhancement Program. The process, however, did not include agriculture producers or representation from the environmental community. The Agriculture, Fish and Water process expands the negotiations to include these groups.

The state departments of Agriculture, Fish and Wildlife, and Ecology, as well as the Washington Conservation Commission and staff from the Governor's Office, have begun meeting with representatives from the agricultural community, federal agencies, local government, interested legislators, environmental groups, and Tribes to discuss their possible involvement in a collaborative process, called Agriculture, Fish and Water (AFW). This is a negotiated process aimed at voluntary compliance.

The AFW process involves negotiating changes to the existing Field Office Technical Guide (FOTG) and the development of guidelines for Irrigation Districts to be used to enhance, restore, and protect habitat for endangered fish and wildlife species, and address state water quality needs. This two-pronged approach has developed into two processes, one involving agricultural interests and the second one concerns Irrigation Districts across the state.

Habitat Limiting Factors Analysis

Section 10 of Engrossed Substitute House Bill 2496 (Salmon Recovery Act of 1998), directed the Washington State Conservation Commission (WCC), in consultation with local governments and treaty tribes to invite private, federal, state, tribal, and local government personnel with appropriate expertise to convene as a Technical Advisory Group (TAG). The purpose of the TAG is to identify habitat limiting factors that effect the natural production of salmonids. One important task in identifying these habitat limiting factors is to map salmonid distribution. Maps of salmonid distribution within WRIA 3, and including the lower Skagit River tributaries are available at the following url: <http://salmon.scc.wa.gov/>

The results of assessing Habitat Limiting Factors are intended to be used by locally-based selection committees to prioritize projects for funding under the state salmon recovery program. The results are also intended to be used by local organizations and individuals interested in habitat restoration to identify projects by focusing resources on habitat work that will have the greatest benefit to fish. The TAGs also identify gaps in existing information so future data collection can be efficiently targeted.

Conservation Reserve Enhancement Program

The Conservation Reserve Enhancement Program (CREP) was established to provide a flexible and cost-effective means to address agriculture-related environmental issues by targeting federal and state funding for restoration projects in geographic regions of particular environmental sensitivity. In April 1999 the State of Washington submitted a CREP contract proposal to the Farm Service Agency (FSA) to enhance riparian habitat conditions on agricultural lands along streams which provide important habitat for listed salmonid species.

The program is cooperatively administered by the Farm Service Agency and the Washington State Conservation Commission and relies on voluntary participation by landowners. The farmers and ranchers who participate in the program sign 10- to 15- year contracts with the Federal Government, agreeing to remove their land from agricultural production and planting it to woody or shrub vegetation. The landowners will be eligible to receive rental payments and other financial incentives in return for the loss of production from their lands.

The Washington State CREP program is designed to address water quality degradation that is a direct or indirect result of agricultural activities on private lands along freshwater streams. On a statewide basis, approximately 37 percent of the freshwater salmon streams on private lands in Washington pass through agricultural land use areas. Farming and ranching activities on these lands have led to removal or elimination of native riparian vegetation with resultant increases in water temperature, rates of sedimentation, and changes in channel morphology.

The project area includes private agricultural lands along streams identified in the 1993 Salmon and Steelhead Status Inventory (SASSI) that provide habitat for salmonid stocks in depressed or critical condition and that are listed under the Federal Endangered Species Act. Up to 100,000 acres of private cropland and grazing land, including 3-4,000 miles of riparian area, will be eligible for inclusion in this program. The riparian forest buffer is the primary conservation practice authorized in the Washington CREP. It is anticipated that restoring forested riparian buffers will have a significant positive impact on the targeted freshwater streams.

The six objectives of the Washington CREP are directly related to improvement of riparian and aquatic ecosystems that provide key habitats for salmonids. These six objectives are:

- Restore 100 percent of the area enrolled for the riparian forest practice to a properly functioning condition for distribution and growth of woody plant species.
- Reduce sediment and nutrient pollution from agricultural lands next to the riparian buffers by more than 50 percent.
- Establish adequate vegetation on enrolled riparian areas to stabilize 90 percent of stream banks under normal (non-flood) water conditions.
- Reduce the rate of stream water heating to ambient levels by planting adequate vegetation on all riparian buffer lands.
- Help farmers and ranchers to meet the water quality requirements established under Federal law and Washington's agricultural water quality laws.
- Provide adequate riparian buffers on 2,700 stream miles to permit natural restoration of stream hydraulic and geomorphic characteristics that meet the habitat requirements of salmon and trout.

Washington CREP includes a set of best management practices (BMPs) designed to reduce adverse environmental impacts. These BMPs will be followed on all CREP activities and will be provided to all farmers and ranchers who enroll in the program. The Services regard these BMPs as integral components of the Washington CREP and consider them to be part of the action.

The Services believe that this programmatic consultation on the Washington CREP removes the requirement for most project level consultation. Consequently, unless otherwise identified within the biological opinion (BO), activities performed within the Washington CREP that are consistent with the BMPs described in the biological assessment (BA) and Reasonable and Prudent Measures (RPMs) and Terms and Conditions described in the BO will not require further consultation. However, the Services have identified certain activities which have a

greater likelihood of adverse impacts to salmonids and their habitat which will require site-specific consultation. These activities are identified within the BO and include, but are not limited to, actions such as, bank shaping that exceeds 30 linear feet and any activities that are not consistent with the CREP BA (BMPs inclusive) and this BO (Reasonable and Prudent Measures and Terms and Conditions inclusive).

The National Marine Fisheries Services (NMFS) and the U.S. Fish and Wildlife Service (USFWS) believe that full achievement of the Washington CREP is likely to make a very substantial contribution to the survival and recovery of those aquatic species covered by this opinion. Nonetheless, the Services also believe that some of the site-specific actions associated with CREP may result in short term adverse effects to listed fish and associated incidental take. Accordingly, the Services provided a set of nondiscretionary "reasonable and prudent measures" in the accompanying incidental take statement which they believe are necessary to minimize the take of listed species associated with the Washington CREP.

The primary long-term benefits the buffers will provide for salmonids is shade and the corresponding reduction in water temperature, which is a limiting factor for salmonid reproduction in most of the waterways targeted by the program.

Skagit County

Water Quality Monitoring

The Skagit County Public Works Department Surface Water Management Section (SWMS) is monitoring water quality in streams flowing in agricultural lands through the Baseline Monitoring Project. The goal is to establish a baseline that characterizes streams in Skagit County's agricultural areas and to provide a foundation to identify any trends in watershed health in the Samish and Skagit River Basins. The SWMS plans to expand its water quality monitoring program by adding additional stations in Hansen Creek, Carpenter Creek, Red Creek, and Fisher Creek for continuous temperature monitoring. Current water quality parameters measured at each station include dissolved oxygen, nutrients, fecal coliform, temperature, pH, turbidity, and conductivity.

Growth Management Act (GMA) and Critical Areas Ordinance (CAO)

The Washington State Legislature enacted the Growth Management Act (GMA) in 1990 in response to growth and development pressures in the state. The Act requires local governments to adopt development regulations, such as subdivision and zoning ordinances, to carry out comprehensive plans.

The Growth Management Act has been amended several times between 1991 and 1998 to further define requirements and to establish a framework for coordination among local governments. The plans include the following chapters: land use, housing, capital facilities, transportation, utilities, shorelines, economic development, and rural (for counties). Chapters on economic development and parks and recreation also are required, if state funding is provided.

Under the Growth Management Act (GMA), Skagit County has put into place effective regulatory programs for critical areas, including wetlands, geologically hazardous areas, fish and wildlife habitat conservation areas, critical aquifer recharge areas, and frequently flooded areas. Pioneering plans for flood hazard reduction, nonpoint pollution control, and stormwater management have been developed.

Skagit County is in the process of modifying its CAO to meet the requirements of the GMA. The modifications of the CAO relate to management activities in agricultural areas and specifically to those activities requiring a riparian buffer along sensitive stream corridors. A summary of the current alternatives being considered is provided below.

- **Alternative 1:** No Action. Ongoing commercial agriculture activity would be exempt from the CAO. Areas in these zoning designations that are not currently in existing ongoing agriculture are subject to the standard requirements of the CAO.
- **Alternative 2:** 75 foot CREP-Style Buffer Program. Buffers of 75 feet would be implemented, similar to the federal Conservation Reserve Enhancement Program (CREP). For stream Types 1, 2 and 3, the first 50 feet from the stream would be planted with trees and shrubs, and the next 25 feet planted with grasses. A 25- foot grass strip would be planted adjacent to stream Types 4 and 5. Livestock would not be allowed within the forested buffer or grass strip.
- **Alternative 3:** Agricultural activities are required to not harm fish and wildlife habitat areas. Farm plans and best management practices would be implemented as necessary to prevent harm. This alternative would rely to a significant degree on existing federal and state programs that already regulate certain farm practices. Agricultural practices would need to be conducted in a manner that protects and does not degrade the functions and values of the adjacent watercourse habitat.
- **Alternative 4:** Standard Critical Areas Protection. Existing CAO requirements ranging from 50- foot buffers for Type 4 and 5 streams to 200-foot buffers for Type 1 and 2 streams would be required. Buffer widths may be increased, decreased or averaged, as the County Code allows. The buffers would not be planted. Livestock would not be allowed within the buffer.

As of May 2003, the County expects to choose one of the alternatives

Skagit Watershed Council

The Skagit Watershed Council (SWC) is a non-profit organization which includes 36 member organizations, including tribes, county, state and federal government entities, conservation organization, and business and industry groups. SWC is recognized as a State lead entity under the Salmon Recovery Act.

The mission of the SWC is to provide technical assistance, public outreach and education, and a collaborative approach within the Skagit Watershed to understand, protect, and restore the production and productivity of healthy ecosystems in order to support sustainable fisheries. The

SWC has been instrumental in the coordination, prioritization, funding, and implementation of habitat protection and restoration projects for salmon and other fish species including native char in the Skagit River basin.

Watershed planning for protecting and restoring fish resources in the Skagit basin follows the SWC's "Habitat and Restoration Strategy". This landscape-based strategy is based upon the best available science regarding natural processes, human disturbance, habitat conditions, fish population distribution and trends, and ecosystem health.

The SWC has completed a basin-wide evaluation of habitat conditions for salmon. This planning tool has been used to screen and prioritize fish habitat protection and restoration projects in the basin and identify "priority" sub basins in the Skagit River watershed for protection and restoration projects.

Skagit Fisheries Enhancement Group

The Skagit Fisheries Enhancement (SFEG) is a nonprofit organization formed in 1990 to engage communities in habitat restoration and watershed stewardship in order to enhance salmon populations. The organization supports projects that are designed to improve and protect local watersheds by offering assistance to local landowners.

SFEG conducts restoration projects that include riparian restoration, improvement of fish passage, nutrient enhancement, and instream enhancement projects such as channel enhancement and streambank stabilization. The SFEG monitoring program is designed to evaluate the effect of restoration work to improve natural watershed conditions and salmon resources. Results of monitoring programs help guide designs for future restoration projects and document successes to funding entities.

Skagit County Conservation District

The Skagit Conservation District (SCD) is a legal subdivision of Washington State government organized under "Conservation District Law" RCW Title 89, Chapter 89.08 and composed of farmers, landowners, and concerned citizens. The district priorities and goals include:

- Protection and Improvement of the Quality of Surface and Ground Water
- Watershed Planning and Implementation
- Riparian Reforestation and Enhancement
- Forest Stewardship
- Wildlife Habitat Enhancement
- Conservation Education
- Protection and Preservation of Prime Farmlands
- County Government Assistance
- Increase District Capacity

The SCD encourages and promotes the preservation and optimum beneficial use of agricultural, range and forested lands by helping landowners plan and implement "Best Management Practices" (BMP's) that reduce soil erosion, improve water quality and water conservation, as well as protect the natural resource base of SCD. The SCD also provides:

- Education and technical assistance to non-industrial forest landowners.
- Soils information, conservation maps and knowledge of BMP's to landowners and land managers.
- Implementation programs aimed at protecting the water resources of Skagit County
- Surveys, research studies, comprehensive plans, and demonstration and implementation projects on public and private lands within the District.
- Responsible and accountable management and financial assistance.
- Conservation leadership to federal, state and local governmental agencies.

Skagit System Cooperative

The Skagit System Cooperative (SCC) is a natural resource consortium composed of the Swinomish, Upper Skagit and Sauk-Suiattle tribes with fishing rights in Skagit County waters. It is the continuing policy of the SCC to protect, preserve, and enhance the Skagit fishery habitat and other natural resources and environment which affect the quality of that habitat. In addition, the SCC and Tribes policy is to achieve a net gain in the productive capacity of the Skagit Fishery habitat.

Applicable Water Quality Criteria

This report and the subsequent TMDL are designed to address impairments of characteristic uses caused by high temperatures. The characteristic uses designated for protection in Lower Skagit River basin streams are as follows (Chapter 173-201A WAC):

"Characteristic uses. Characteristic uses shall include, but not be limited to, the following:

(i) Water supply (domestic, industrial, agricultural).

(ii) Stock watering.

(iii) Fish and shellfish:

Salmonid migration, rearing, spawning, and harvesting.

Other fish migration, rearing, spawning, and harvesting.

Clam and mussel rearing, spawning, and harvesting.

Crayfish rearing, spawning, and harvesting.

(iv) Wildlife habitat.

(v) Recreation (primary contact recreation, sport fishing, boating, and aesthetic enjoyment).

(vi) Commerce and navigation."

The state water quality standards describe criteria for temperature for the protection of characteristic uses. Red, Turner, Otter Pond, Carpenter, Fisher, Hansen, Nookachamps, Lake, and East Fork Nookachamps creeks are all designated as Class A waters.

The temperature criteria for Class A waters are as follows:

"Temperature shall not exceed 18.0°C...due to human activities. When natural conditions exceed 18.0°C..., no temperature increases will be allowed which will raise the receiving water temperature by greater than 0.3°C."

During critical periods, natural conditions may exceed the numeric temperature criteria mandated by the water quality standards. In these cases, the antidegradation provisions of those standards apply.

"Whenever the natural conditions of said waters are of a lower quality than the criteria assigned, the natural conditions shall constitute the water quality criteria."

Water Quality and Resource Impairments

The 1998 303(d) listings for temperature in the lower Skagit River basin are as follows:

- WA-03-1011 CARPENTER CREEK Temperature (listed in 1998)
Skagit System Cooperative data show 10 excursions beyond the criterion in 1997.
- WA-03-1012 FISHER CREEK Temperature (listed in 1996 and 1998)
Skagit System Cooperative data show 3 excursions beyond the criterion in 1997.
- WA-29-1019 HANSEN CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 6 excursions beyond the criterion in 1997.
- WA-29-1017 NOOKACHAMPS CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 20 excursions beyond the criterion in 1997.
- WA-29-4200 E.F. NOOKACHAMPS CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 5 excursions beyond the criterion in 1997.
- WA-29-1019 RED CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 10 excursions beyond the criterion in 1997.
- WA-29-1017 TURNER CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 9 excursions beyond the criterion in 1997.
- WA-29-4200 OTTER POND CREEK Temperature (listed in 1998).
Skagit System Cooperative data show 9 excursions beyond the criterion in 1997.

The 303(d) listings for temperature are also confirmed by recent data collected in 2001 and 2002 by Ecology and the Skagit County Surface Water Management Division. Temperatures in excess of the water quality standards have been observed throughout the lower Skagit River tributaries at numerous locations (Table 8). Detailed station location maps are given in Figures 15 and 19.

Both Ecology and Skagit County temperature data show that the warmest temperatures in the Lower Skagit River tributaries occur in Carpenter Creek, Red Creek, and Nookachamps Creek. Temperatures in these three tributaries have frequently been measured near or above the lethal limit for steelhead of about 24 degrees C.

Table 8. Highest daily maximum temperatures in the lower Skagit River tributaries during 2001 (*data in italics indicate values greater than the water quality standard*).

Station ID	Station Name	latitude dec deg NAD27	longitude dec deg NAD27	highest daily maximum temperatures during 2001 degrees C	highest 7-day- averages of daily maximum temperatures during 2001 degrees C	Water Quality Classification	Water Quality Standard degrees C
Department of Ecology Stations 2001							
03C01	Carpenter Creek near mouth	48.323	-122.342	24.18	22.89	A	18
03C02	Carpenter Creek at SR534	48.341	-122.323	23.27	22.01	A	18
03C03	Carpenter Creek at Stackpole Road	48.341	-122.307	18.42	17.93	A	18
03C04	Carpenter Creek at Little Mountain	48.395	-122.284	16.16	15.54	A	18
03EF01	EF Nookachamps Creek at SR9	48.446	-122.251	19.68	19.06	A	18
03EF02	EF Nookachamps at Beaver Lake Road	48.424	-122.209	19.7	19.25	A	18
03F01	Fisher Creek at Franklin Road	48.319	-122.328	14.72	14.38	A	18
03F02	Fisher Creek at Starbird Road	48.309	-122.296	19.06	18.15	A	18
03H01	Hansen Creek at Hoehn Road	48.503	-122.197	19.21	18.75	A	18
03H02	Hansen Creek at Highway 20	48.521	-122.198	17.99	17.19	A	18
03U04	Red Creek near Highway 20	48.523	-122.191	28.26	26.71	A	18
03H03	Hansen Creek at Hansen Creek Road	48.559	-122.208	18.29	17.93	A	18
03N01	Nookachamps Creek nr mouth	48.467	-122.292	25.25	24.3	A	18
03N02	Nookachamps Creek abv Barney Lake	48.431	-122.263	22.17	21.58	A	18
03T01	Turner Creek at Beaver Lake Road	48.439	-122.219	18.77	18.35	A	18
03N03	Nookachamps Creek blw Big Lake	48.400	-122.237	24.41	23.7	A	18
03N04	Lake Creek above Big Lake	48.345	-122.205	20.11	17.53	A	18
03U03	Otter Pond Creek near mouth	48.403	-122.227	16.17	15.67	A	18
Skagit County Surface Water Stations-2001 (Aug-Sept)							
12	Nookachamps Creek at Swan Road	48.453	-122.27	23.44	22.56	A	18
13	EF Nookachamps Creek at Hwy 9	48.446	-122.251	19.59	18.99	A	18
15	Nookachamps Creek at Knapp Road	48.428	-122.257	20	19.68	A	18
16	EF Nookachamps Creek at Beaver Lake Road	48.424	-122.208	19.86	19.47	A	18
17	Nookachamps Creek at Hwy 9-Big Lake outlet	48.400	-122.237	23.52	23.08	A	18
18	Lake Creek at Hwy 9	48.356	-122.202	17.6	17.15	A	18
19	Hansen Creek at Hoehn Road	48.503	-122.197	19.66	19.02	A	18
20	Hansen Creek at Northern State	48.530	-122.199	19.22	18.69	A	18
Skagit County Surface Water Stations-2002 (1 June-10 Sept)							
12	Nookachamps Creek at Swan Road	48.453	-122.27	na	na	A	18
13	EF Nookachamps Creek at Hwy 9	48.446	-122.251	20.67	19.41	A	18
15	Nookachamps Creek at Knapp Road	48.428	-122.257	22.82	21.77	A	18
16	EF Nookachamps Creek at Beaver Lake Road	48.424	-122.208	20.46	19.04	A	18
17	Nookachamps Creek at Hwy 9-Big Lake outlet	48.400	-122.237	26.13	24.84	A	18
18	Lake Creek at Hwy 9	48.356	-122.202	18.09	17.22	A	18
19	Hansen Creek at Hoehn Road	48.503	-122.197	20.03	18.75	A	18
20	Hansen Creek at Northern State	48.530	-122.199	18.69	17.55	A	18

Seasonal Variation

Clean Water Act Section 303(d)(1) requires that TMDLs “be established at level necessary to implement the applicable water quality standards with seasonal variations”. The current regulation also states that determination of “TMDLs shall take into account critical conditions for stream flow, loading, and water quality parameters” [40 CFR 130.7(c)(1)]. Finally, Section 303(d)(1)(D) suggests consideration of normal conditions, flows, and dissipative capacity.

Existing conditions for stream temperatures in the Lower Skagit River tributaries reflect both seasonal and diurnal variation. Average temperatures are hottest in the summer months, while cooler temperatures predominate in the winter months. Minimum temperatures occur in the evening, while maximum temperatures are observed in the daytime. Figures 13 and 14 summarize the highest daily maximum and the highest seven-day average maximum water temperatures of 2001 for waterbodies in Carpenter-Fisher, Hansen, and Nookachamps Creek watersheds. The highest temperatures typically occur from July through August. This time frame is used as the critical period for development of the TMDL.

Seasonal estimates for stream flow, solar flux, and climatic variables for the TMDL are taken into account to develop critical conditions for the TMDL model. The critical period for evaluation of solar flux and effective shade was assumed to be August 12, because it is the mid-point of the period when water temperatures are typically at their seasonal peak.

Critical stream flows for the TMDL were evaluated as the lowest 7-day average flows with a 2-year recurrence interval (7Q2) and 10-year recurrence interval (7Q10) for the months of July and August. The 7Q2 stream flow was combined with air temperatures during a typical climatic year, and the 7Q10 stream flow was combined with atmospheric conditions during a worst-case climatic year.

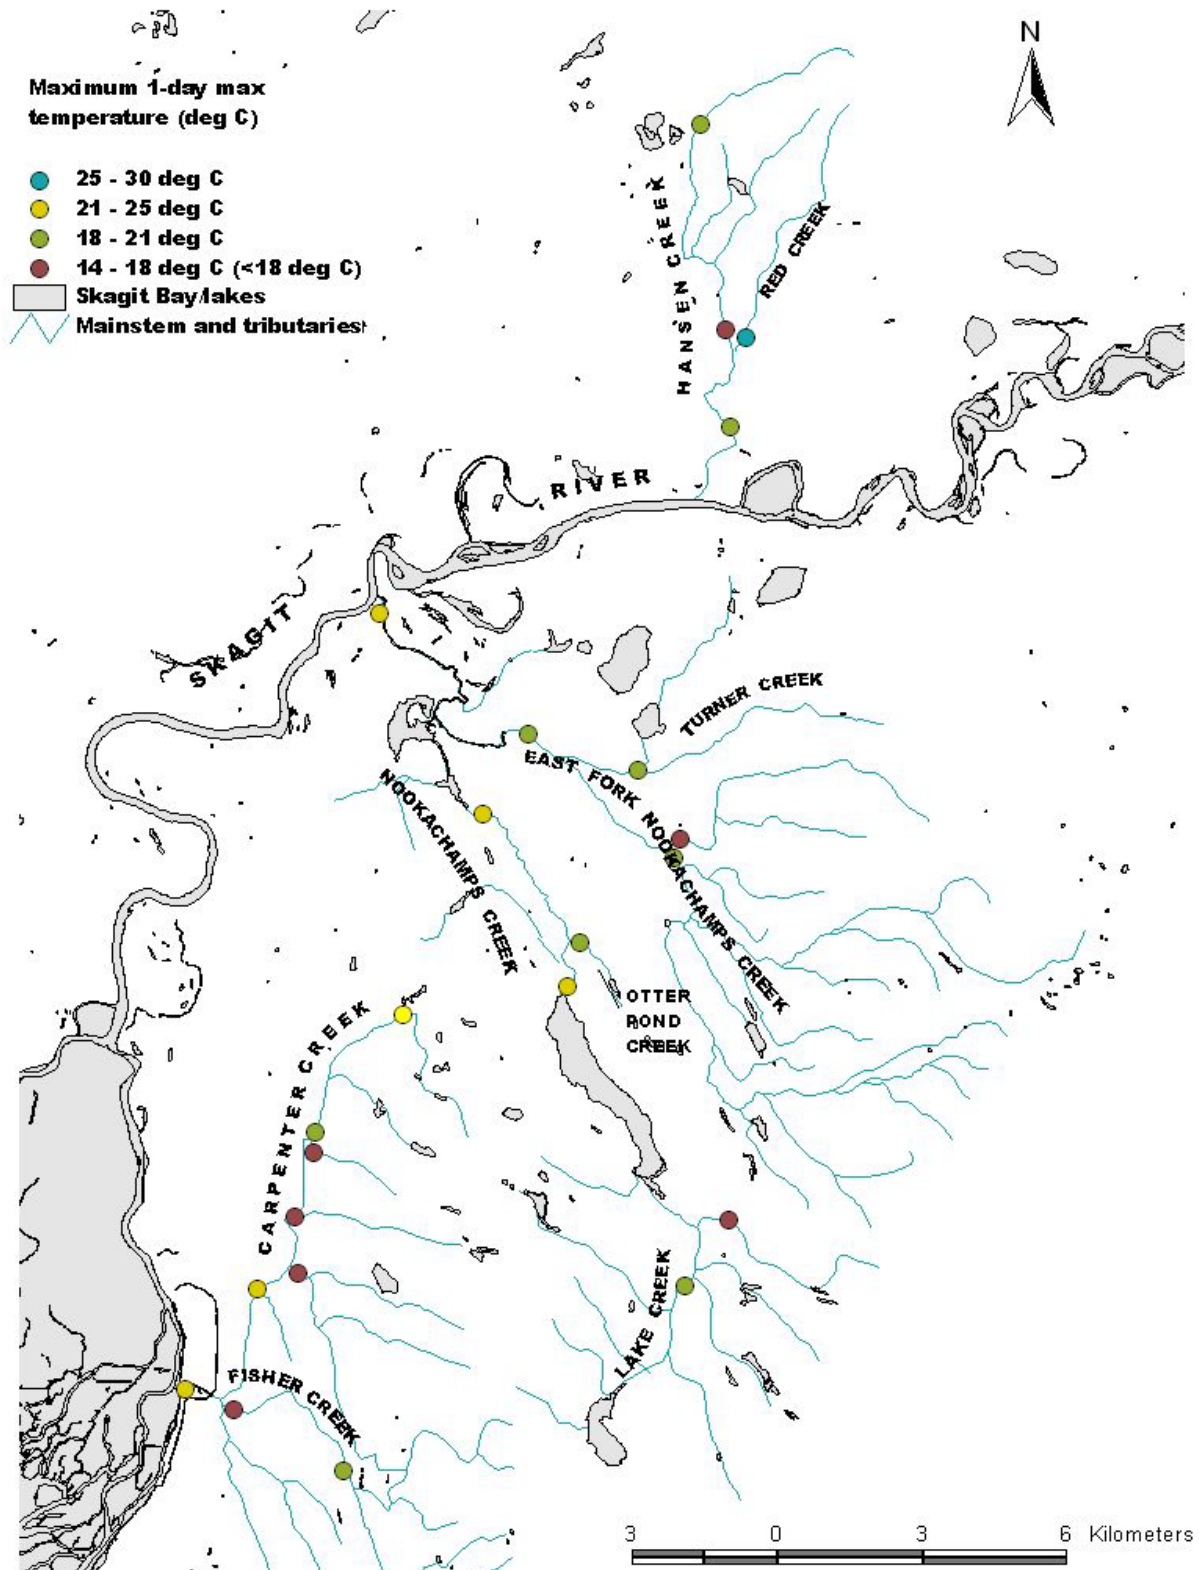


Figure 13. Highest daily maximum temperatures in the lower Skagit River tributaries in 2000 on the hottest day of the year for each station.

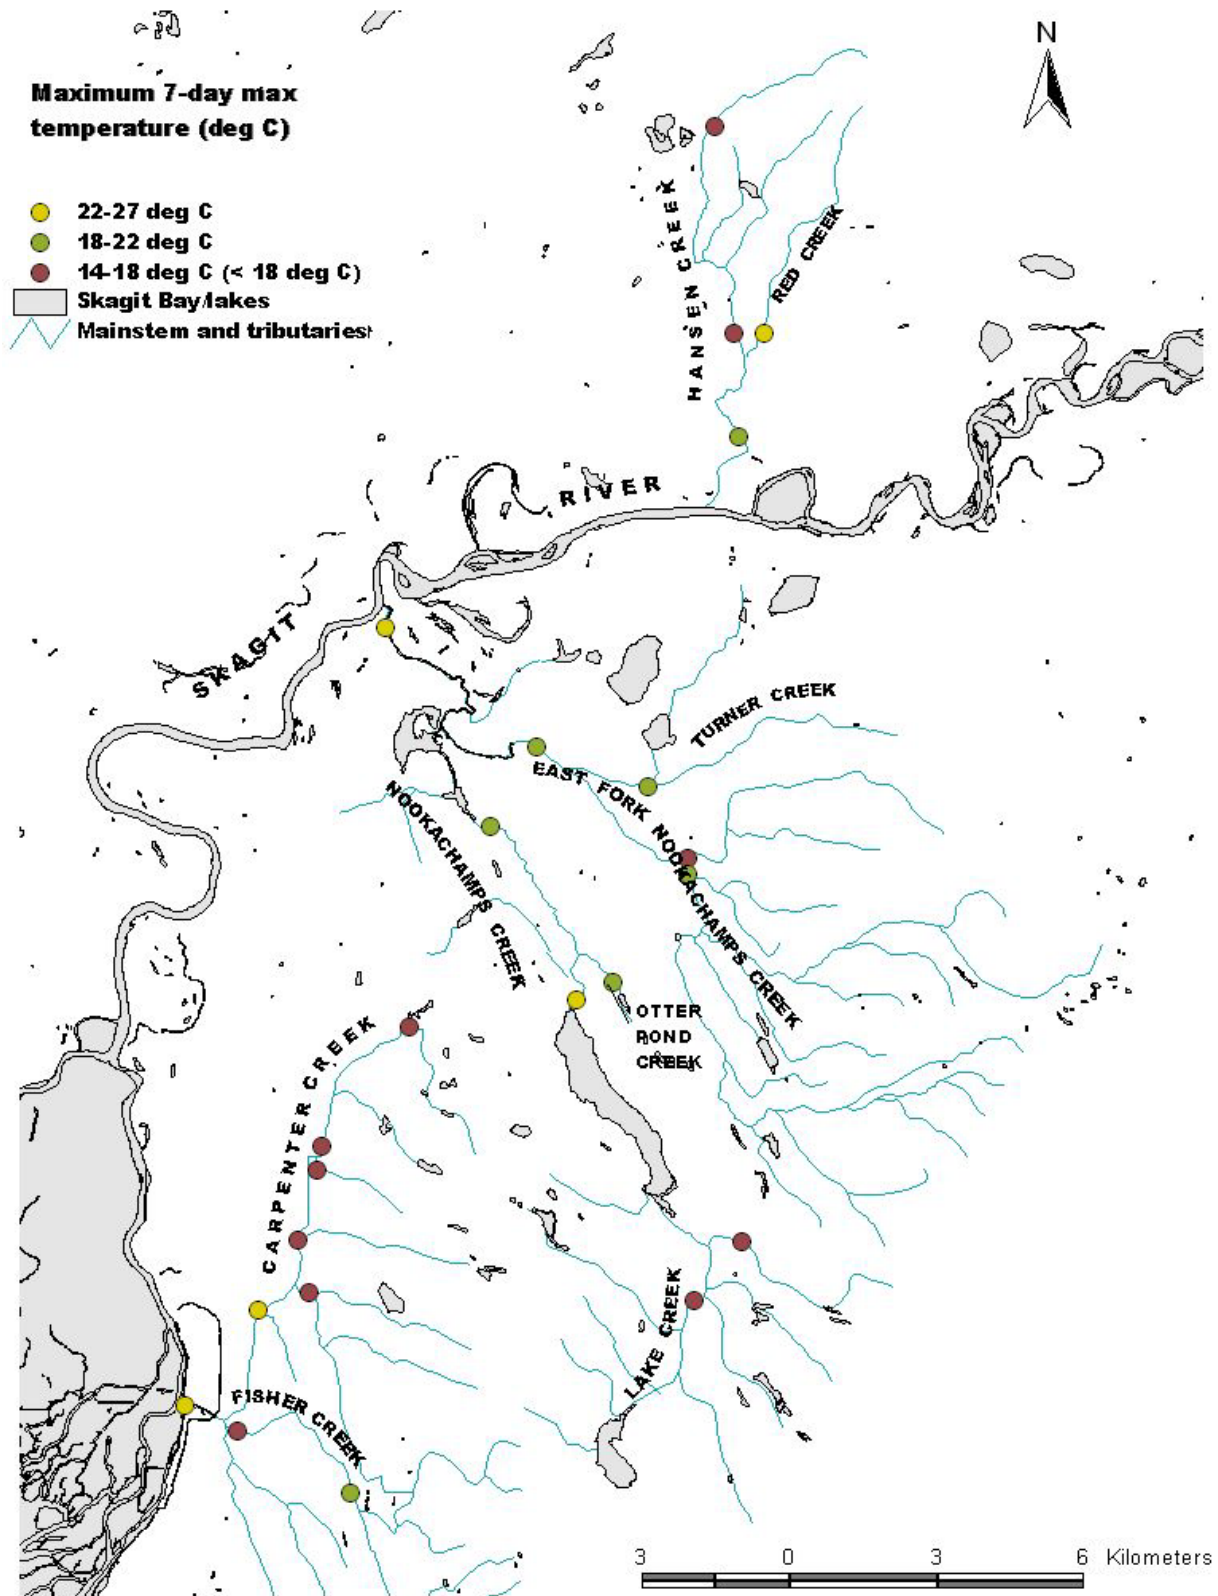


Figure 14. Maximum 7-day averages of daily maximum temperature in the lower Skagit River tributaries in 2000.

Technical Analysis

Stream Heating Processes

Riparian vegetation, stream morphology, hydrology, climate, and geographic location influence stream temperature. While climate and geographic location are outside of human control, riparian condition, channel morphology, hydrology, and ultimately temperature are affected by land use activities. Specifically, the elevated summertime stream temperatures attributed to anthropogenic sources in the lower Skagit River tributaries result from the following:

- Riparian vegetation disturbance reduces stream surface shading via decreased riparian vegetation height, width, and/or density, thus increasing the amount of solar radiation reaching the stream surface. Current riparian forests are extensively degraded compared with historic (circa 1873) conditions (Pess et al. 1999). Pess et al. (1999) reported that the most severely degraded riparian forests in the adjacent Stillaguamish River watershed are those with extensive agricultural activity, followed by rural residential development. Forest lands generally have the least degraded riparian forests, and riparian forests in federal lands are generally in much better condition than those on state and private land.
- Past land management activities in the lower Skagit River watershed were likely very similar to those which occurred in the adjacent Stillaguamish River watershed. Significant channel widening in the Stillaguamish occurred the early 1900s. Since the 1930s, the mainstem channels have been narrowed due to revetment, agricultural development, and possibly a recovery from widespread riparian logging early in the century. Landslides triggered by forest practices, in combination with riparian logging, have caused numerous tributaries to widen and aggrade at some point in the last half century. Widening of the channels throughout the lower Skagit River study has likely decreased the effectiveness of potential shading from near-stream vegetation.
- Reduced summertime base flows may result from instream withdrawals and hydraulically connected groundwater withdrawals. Reducing the amount of water in a stream can increase stream temperature (Brown, 1972).

Current Conditions

Available Water Temperature Data

A network of continuous temperature dataloggers was installed in the lower Skagit River watershed by the Department of Ecology as described by Pelletier and Bilhimer, 2001 (Figure 15). Data from 2001 show that water temperatures in excess of the Class A standards of 18°C are common throughout the study area (Figures 13-14 and 16-18).

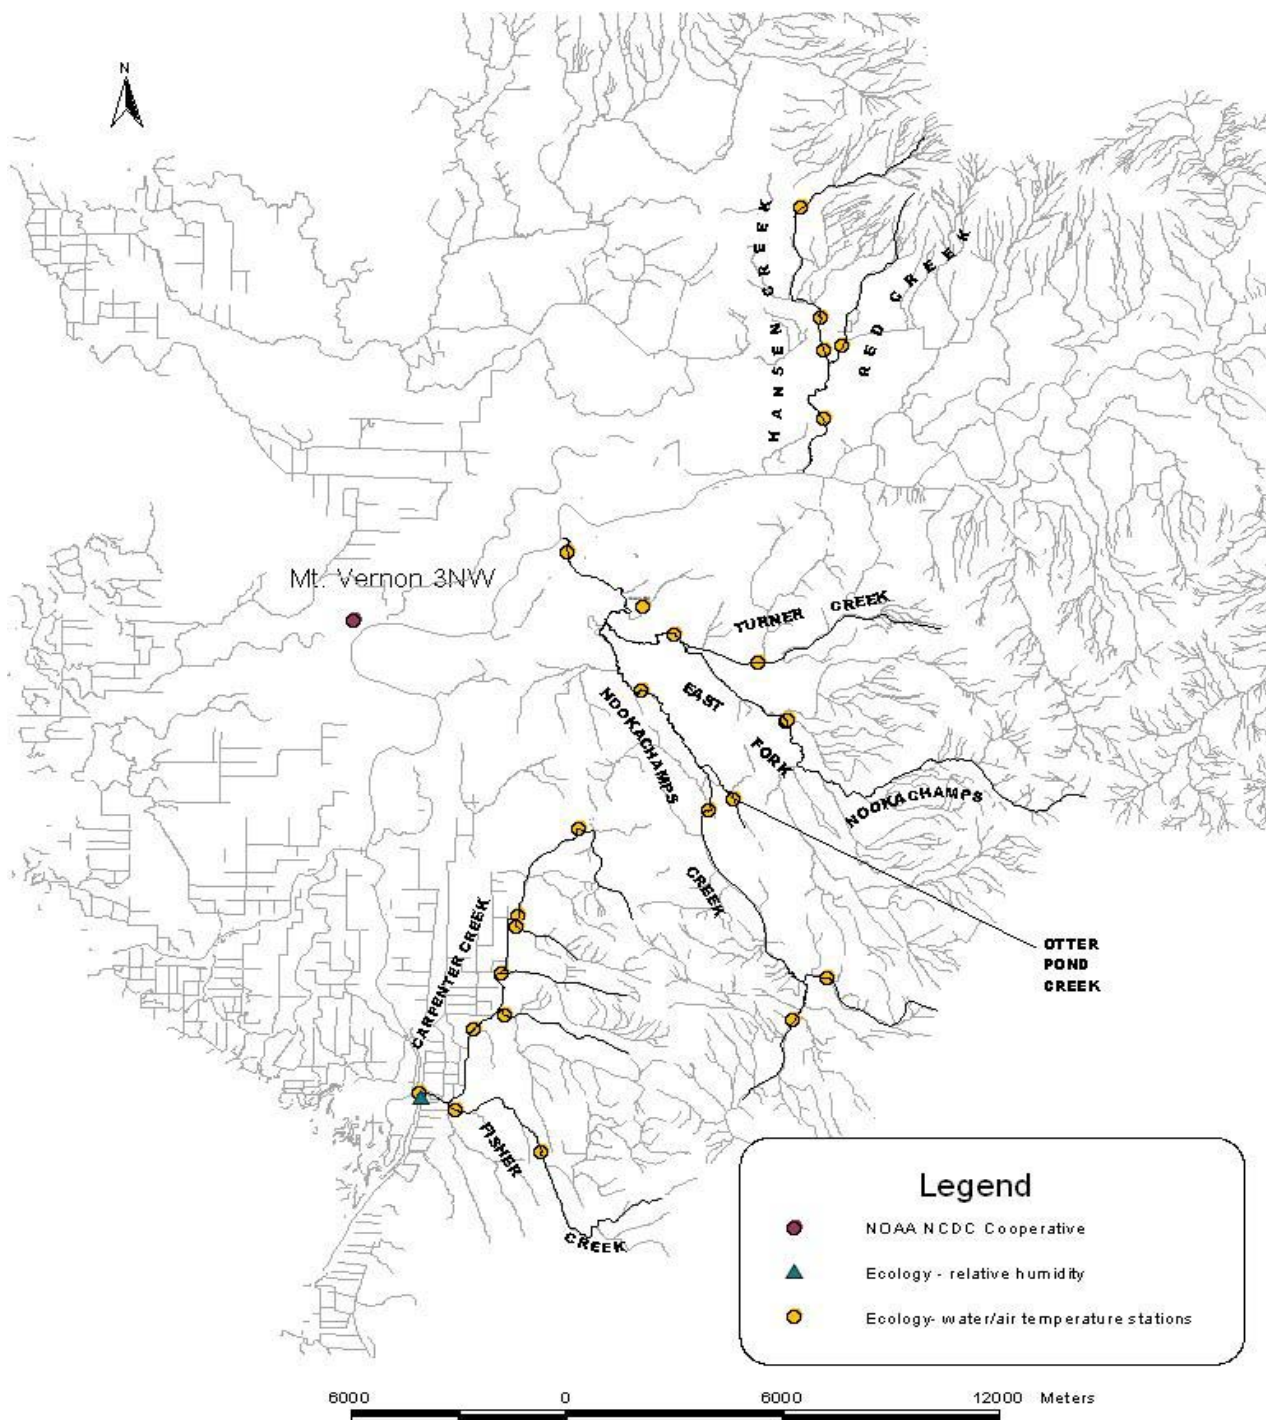


Figure 15. Location of Ecology air and water temperature recording devices, relative humidity station, and NOAA NCDC Cooperative weather station.

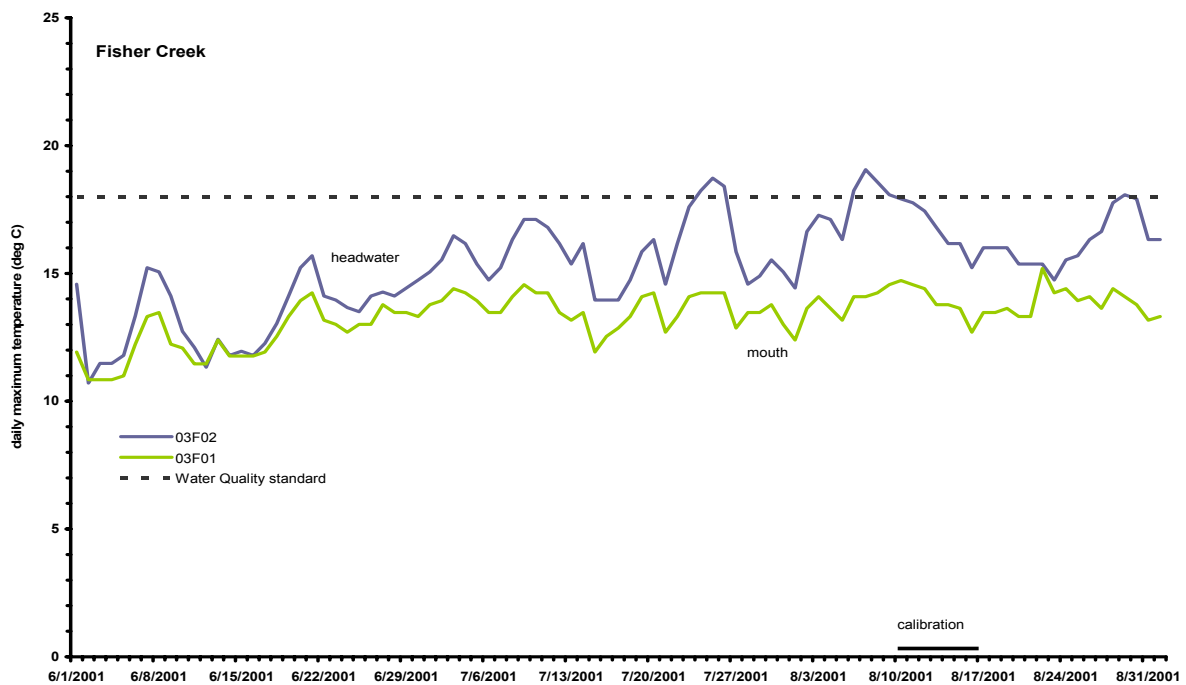
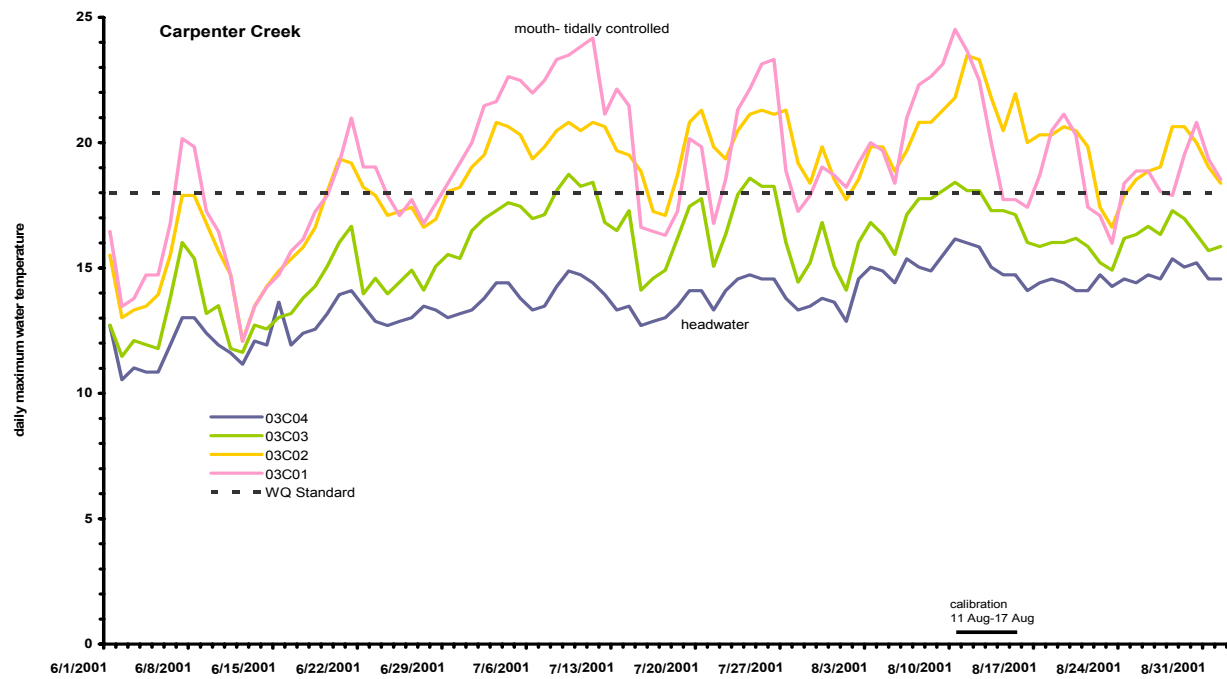


Figure 16. Daily maximum water temperatures in Carpenter Creek and Fisher Creek from June to September 2001.

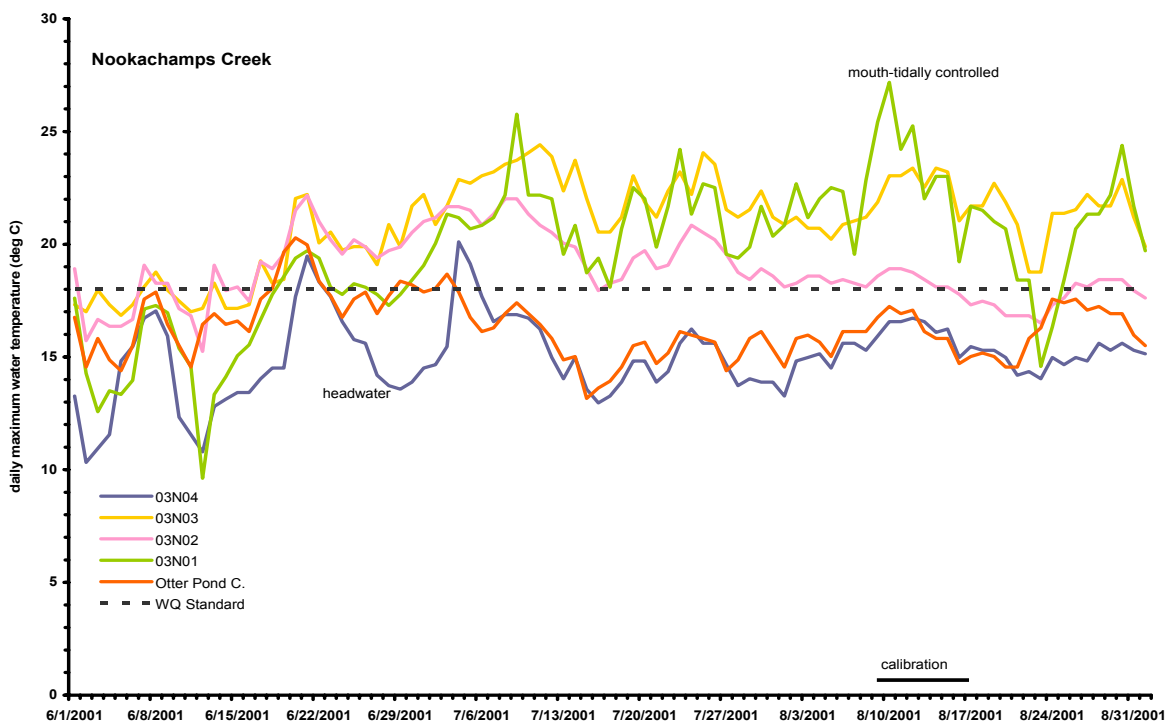
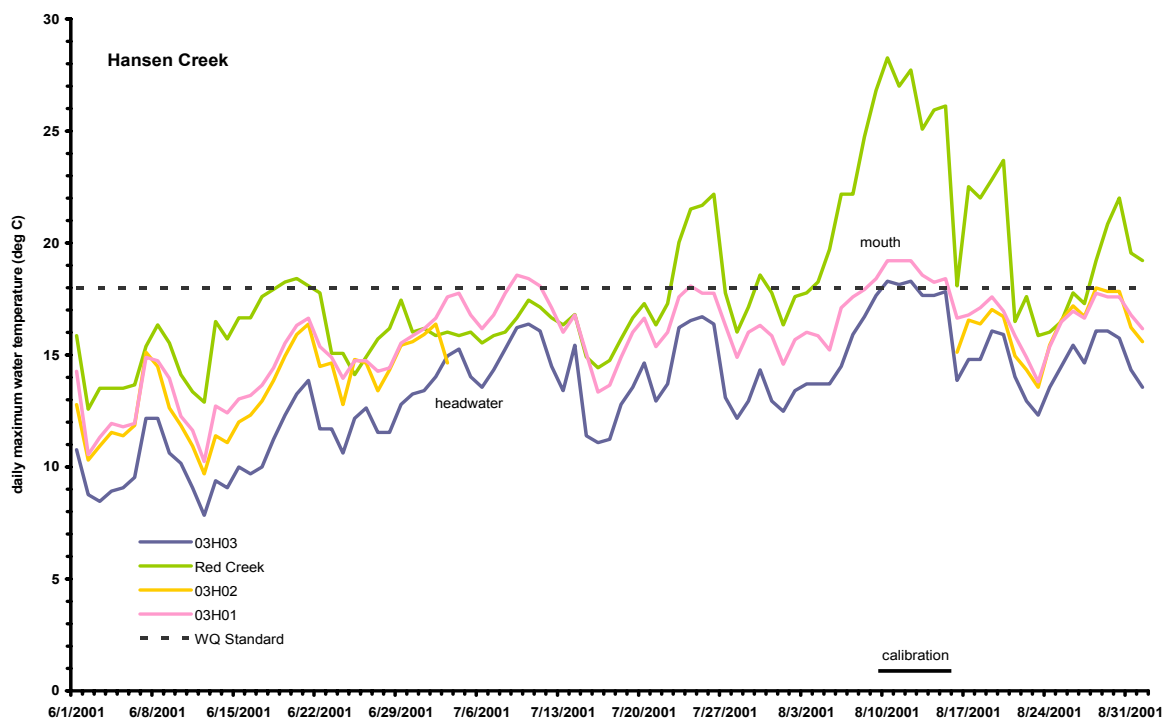


Figure 17. Daily maximum water temperatures in Hansen Creek, Red Creek, Lake Creek (03N04), Nookachamps Creek, and Otter Pond Creek from June to September 2001.

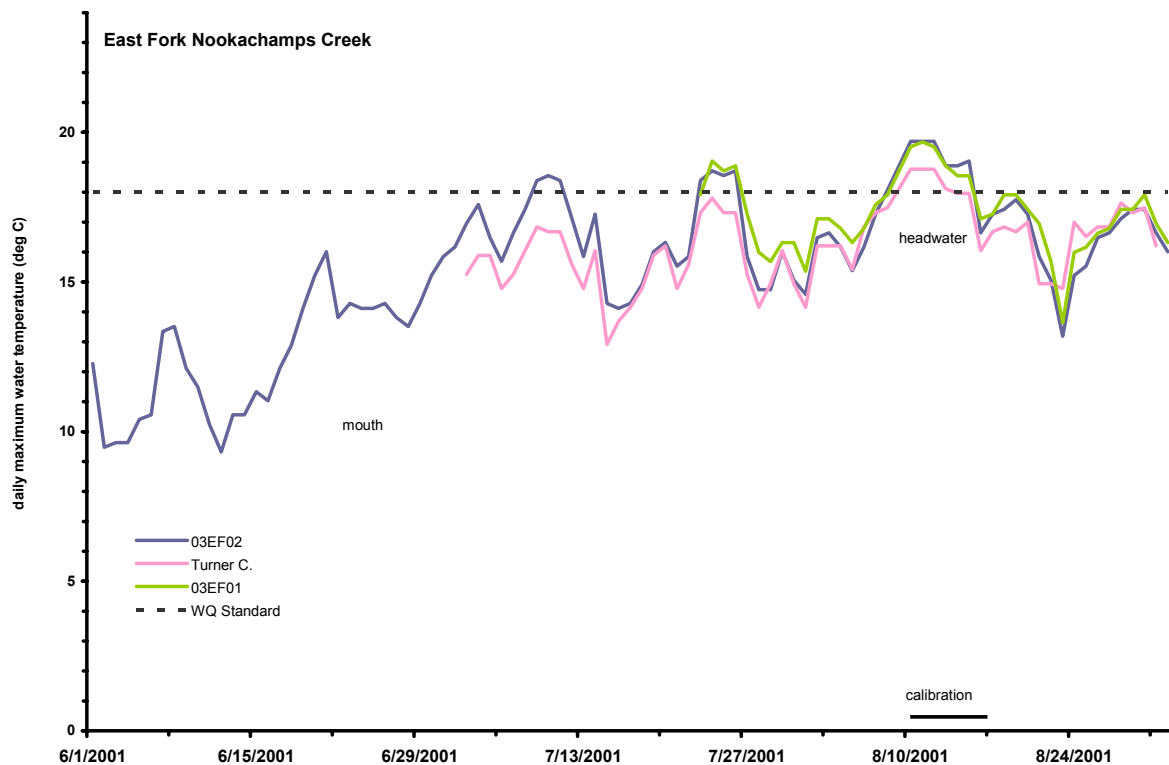


Figure 18. Daily maximum water temperatures in East Fork Nookachamps Creek and Turner Creek from June to September 2001.

A network of continuous temperature dataloggers has also been developed and maintained in Skagit County by the Skagit County Surface Water Management Division. Water and air temperatures were continuously monitored in the spring, summer, and fall of 2001 and 2002 in Nookachamps, East Fork Nookachamps, Lake, and Hansen Creeks (Table 8, Figure 19). Water temperatures in excess of 20°C have been observed in the lower Nookachamps Creek, as well as near the outlet of Big Lake and Lake McMurray (Table 8).

Stream Flow Data

The Department of Ecology installed a flow measurement station in East Fork Nookachamps Creek during 2001 and made numerous flow measurements at all other stations, including a synoptic flow survey in August 2000. The Skagit County Surface Water Management Division also measured instantaneous flows at a number of stations in Hansen, Nookachamps, and East Fork Nookachamps Creeks in 2000. Measured streamflow summaries are given in Appendix B4. The lowest 7-day-average flows during the July-August period with recurrence intervals of 2 years (7Q2) and 10 years (7Q10) were estimated based on low flow statistics from the USGS gaging station in the adjacent Pilchuck Creek basin. The 7Q2 and 7Q10 flows in the

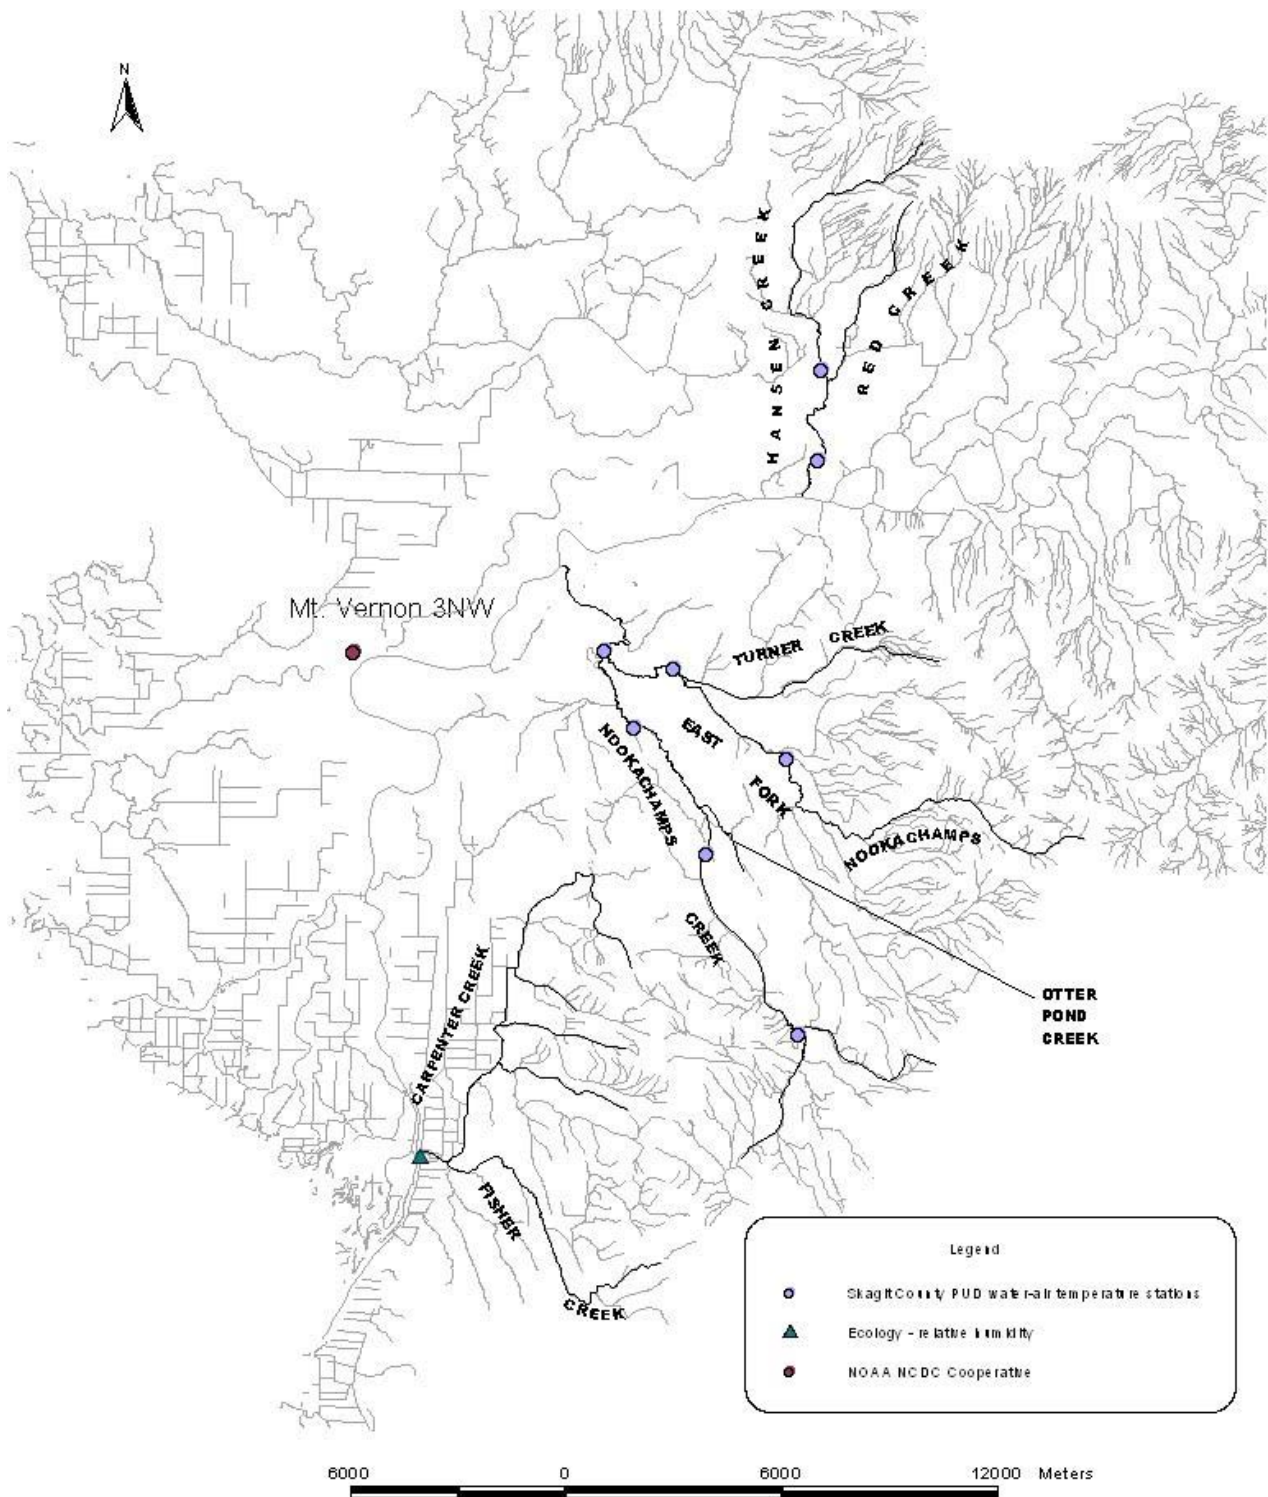


Figure 19. Location of Skagit County air and water temperature recording devices, Ecology relative humidity station, and NOAA NCDC Cooperative weather station.

study area were then estimated by scaling the estimates at the USGS Pilchuck Creek gage according to the sub-watershed areas weighted by annual average precipitation (Table 9). Because of the close proximity of the Pilchuck watershed to the study area, similar annual precipitation values were used as part of the 7Q2 and 7Q10 flow estimations. Widths, depths, and velocities under 7Q2 and 7Q10 conditions for each station are given in Appendix B3.

Table 9. Estimated 7Q2 and 7Q10 flows for selected streams in the study area.

Waterbody	Drainage Area (km ²)	Drainage Area (mi ²)	Estimated 7Q2 flow in cms	Estimated 7Q2 flow in cfs	Estimated 7Q10 flow in cms	Estimated 7Q10 flow in cfs
Pilchuck Creek	134	52	0.15	5.40	0.05	1.80
Carpenter Creek	95	37	0.11	3.82	0.04	1.27
Fisher Creek	17	7	0.02	0.65	0.01	0.22
Hansen Creek	33	13	0.04	1.34	0.01	0.46
Lake Creek	40	15	0.02	0.85	0.01	0.28
Nookachamps Creek	180	69	0.20	7.20	0.07	2.40
EF Nookachamps Creek	91	35	0.10	3.64	0.03	1.20

Hydraulic Geometry

The channel width, depth, and velocity have an important influence on the sensitivity of water temperature to the flux of heat. The near-stream disturbance zones (NSDZ or bankfull width) were digitized from digital rectified orthophotos. In areas where NSDZ edges were not easily identified from the orthophotos (heavy vegetation, cutbanks, floodplain relief), the NSDZ was estimated from a log-log regression of measured bankfull width versus drainage area (Figure 20).

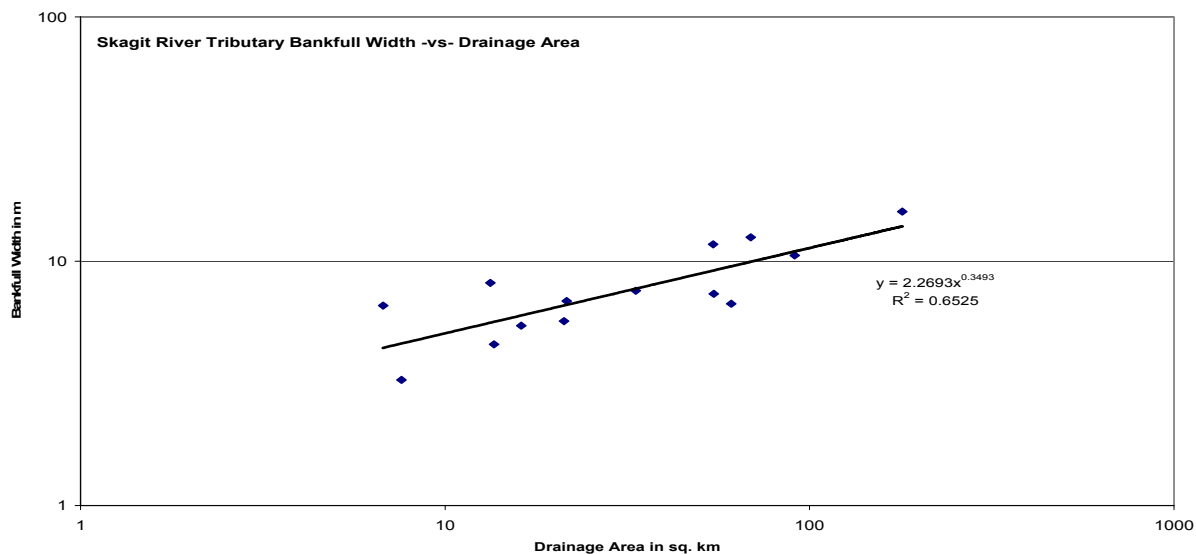


Figure 20. Relationship between bankfull width and drainage area in lower Skagit River tributaries.

Stream widths at low flow were estimated from field measurements as described in Pelletier and Bilhimer (2001). Wetted widths in many parts of the study area were not easily identified from the digital orthophotos. In these reaches the wetted widths were estimated by using the exponents for each basin as shown in Table 10, which shows the general relationships between wetted width, depth, velocity, and flow at all stations in the study area during the June-Sept low flow period.

Table 10. Summary of hydraulic geometry relationships with flow in the lower Skagit River study area. May-October 2001.

		All Stations	Carpenter Creek headwaters	Carpenter Creek "Hill Ditch"	Fisher Creek mainstem	Hansen Creek headwaters	Hansen Creek lower	Lake Creek mainstem	Nooka-champs Creek headwaters	Nooka-champs Creek lower	EF Nooka-champs Creek lower
width	coefficient a	8.0258	3.4597	5.833	2.639	5.8239	7.3012	9.1013	7.4918	5.6837	8.1036
aQ^b	exponent b	0.2405	0.0177	0.14	0.0276	0.1488	0.2895	0.2937	0.3109	0.2206	0.2767
depth	coefficient a	0.3244	0.1509	0.2867	0.2018	0.4358	0.4131	0.2166	0.3417	0.3553	0.328
cQ^d	exponent b	0.4135	0.3011	0.4472	0.0106	0.3327	0.514	0.2395	0.4345	0.3405	0.4253
velocity	coefficient a	0.403	1.8615	0.6141	1.7181	0.3903	0.3027	0.4967	0.5218	0.4834	0.4385
eQ^f	exponent b	0.3596	0.6704	0.4248	0.9154	0.6403	0.1872	0.5142	0.1434	0.4034	0.2494

(1) Flow is in cubic meters per second. Width and depth are in meters, Velocity is in meters per second.

Manning's equation is commonly used to solve for depth (y) given flow (Q), Manning's roughness coefficient (n), wetted width (B₀), and channel slope (S). Manning's equation for a rectangular channel (side slope s=0) is as follows (Chapra, 1997):

$$Q = \frac{1}{n} \frac{[(B_0 + sy)y]^{5/3}}{(B_0 + 2y\sqrt{s^2 + 1})^{2/3}} S_e^{1/2}$$

equation 1

Manning's n typically varies with flow and depth (Gordon et al, 1992). As the depth decreases at low flow, the relative roughness increases. Typical published values of Manning's n, which range from about 0.02 for smooth channels to about 0.15 for rough natural channels, are representative of conditions when the flow is at the bankfull capacity (Rosgen, 1996). Critical conditions of depth for evaluating the period of highest stream temperatures are generally much less than bankfull depth, and the relative roughness may be much higher.

Reach-averaged values of Manning's n may be higher than those estimated at any point where flow was measured because the locations of the cross-sections for flow measurements were typically selected for laminar flow conditions that occur in channels that are deeper and narrower than average. Likewise, reach-averaged depth may be considerably less than the depth at the

flow measurement stations. Therefore, reach-averaged relative roughness is likely to be greater than the measured roughness at the flow stations. Estimated Manning's roughness coefficients (n) are shown in Table 11.

Table 11. Estimated Manning's roughness coefficients (n)

Stream, Stream segment	Average Mannings n value
Carpenter Creek	0.1
Hill Ditch	0.04
Fisher Creek	0.11
Hansen Creek upper	0.0916
Hansen Creek lower	0.0377
Lake Creek	0.081
Nookachamps Creek nr HWY 9 and 538	0.03
Nookachamps Creek	0.05
East Fork Nookachamps Creek	used hydraulic geometry coefficients

The relationships in Tables 10 and 11 were used to define the longitudinal channel characteristics used as input to the QUAL2k model.

Ecology used the Rosgen stream morphology classification system (Rosgen, 1996) to describe the channel characteristics for streams in the Lower Skagit River study area (Table 12). This information is helpful in determining what morphological parameters are contributing to elevated water temperatures in the watershed.

Table 12. Rosgen classification for the lower Skagit River study area.

Stream Name	Identifying Station(s)	Average Slope (%)	Bankfull width/depth Ratio	Sinuosity	Dominant Bed Material	Rosgen Channel Classification
Hill Ditch	03C01, 03C02, 03C03	1	28	very low	sand, silt, clay	diked-channelized
Carpenter Creek	03C04	5	12	low	gravel-cobble	C3
Fisher Creek	03F01	5	13	moderate	gravel-cobble	C3
	03F02	2	17	moderate	gravel-cobble	C3
Hansen Creek	03H03	2.3	20	moderate	cobble-gravel	B3
	03H02, 03H01	1	19	low	gravel	dredged channel
Nookachamps Creek	03N03	1	28	very low	gravel-cobble	channelized
	03N02	1	28	low	cobble-boulder	C2
	03N01	1	28	very low	sand	diked-channelized
Lake Creek	03N04	1	18	low	gravel-cobble	C4
East Fork Nookachamps Creek	03EF02	1	50	low	sand silt clay	channelized
	03EF01	1	24	low	gravel sand	diked channelized

Climate Data

A network of dataloggers was installed to continuously monitor air temperature throughout the study area according to Pelletier and Bilhimer, 2001 (Figure 21). Relative humidity was continuously monitored at one station located near the mouth of Carpenter Creek. The NOAA NCDC station at Mount Vernon 3NW (1956-present) also provide a record of long term trends in climate data. The Mount Vernon 3NW station was used to estimate the median year hottest week and 90th percentile year hottest week conditions for climate.

The highest daily maximum and highest 7-day-average of daily maximum air temperatures for each year of record at Mount Vernon 3NW were ranked to determine the median and 90th percentile conditions (Table 13).

Table 13. Estimated daily maximum and minimum air temperatures at Mount Vernon 3NW on days and weeks with the highest daily maximum temperatures for a median year and 90th percentile year (based on records for 1956 to present).

	median year hottest week	median year hottest day	90th percentile year hottest week	90th percentile year hottest day
date with the hottest daily or weekly maximum air temperature:	8/21-27/86	8/17/97	8/10-16/67	8/17/77
Mount Vernon 3NW				
average daily maximum air temperature on the hottest day or week of the year (degC):	27.2	30.6	29.7	33.9
average daily minimum air temperature on the hottest day or week of the year (degC):	10.1	11.7	10.6	10.0

Intact riparian corridors often produce a microclimate that surrounds the stream where cooler air and ground temperatures, higher relative humidity, and lower wind speeds are characteristic. Riparian microclimates tend to moderate daily air temperatures- reducing maximum air temperatures and increasing minimum air temperatures.

An accurate estimation of air temperatures in the riparian areas during the 7Q2 and 7Q10 model simulations should incorporate this ‘microclimate’ effect. In order to do this, it was necessary to first make comparisons between the air temperatures reported at the Mt. Vernon 3NW station and those air temperatures measured by the thermistors at each Ecology station during the 2001 model calibration and verification period. Table 14 summarizes these comparisons.

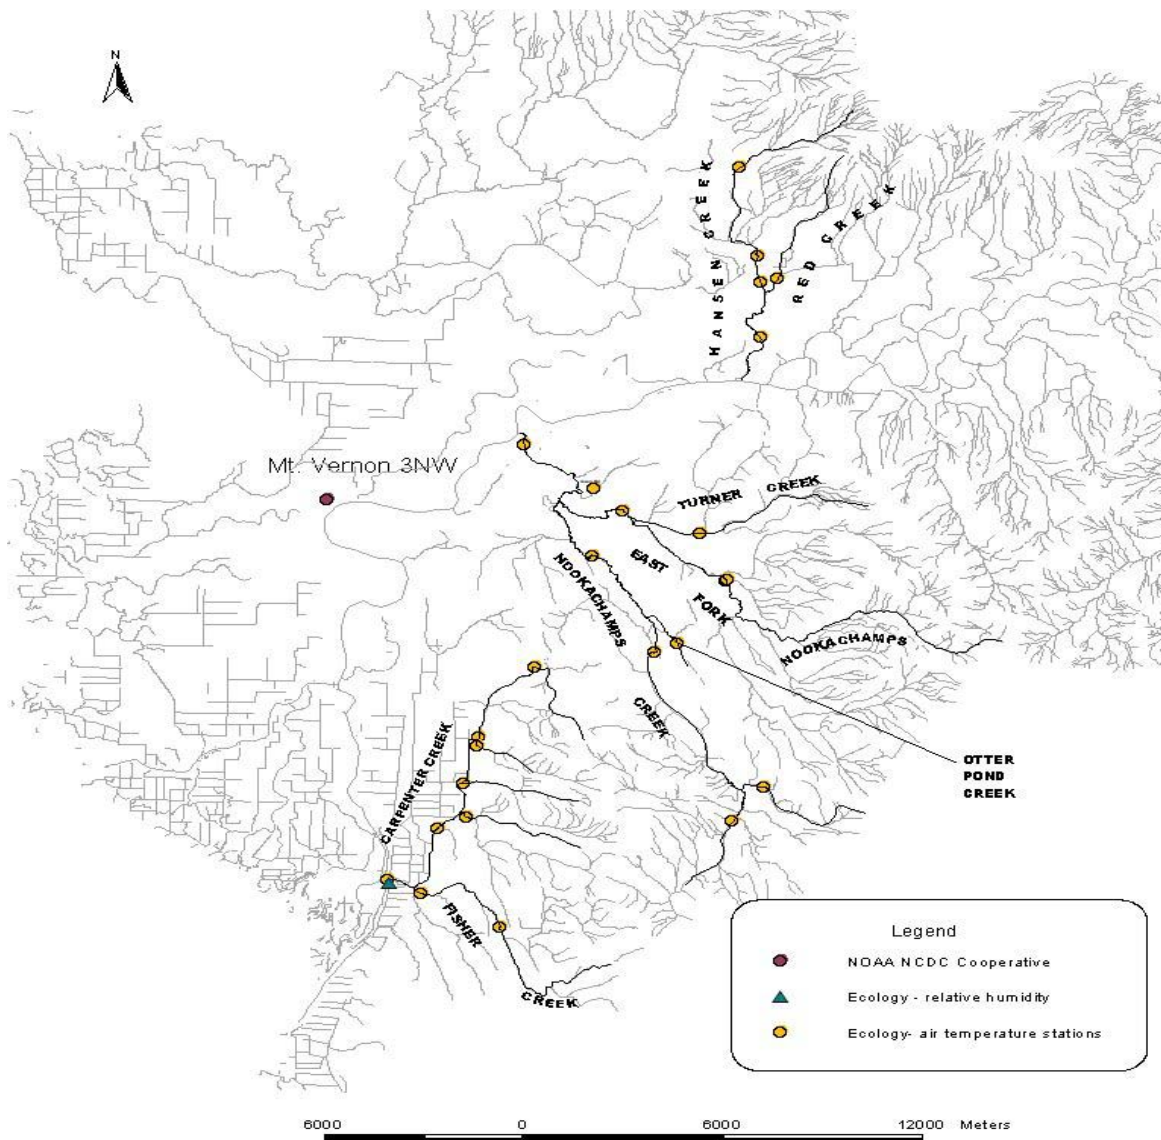


Figure 21. Ecology and NOAA NCDC stations for climate data.

The average difference between the Mt. Vernon 3NW station air temperatures and Ecology temperatures during the calibration and verification period was either subtracted or added to the median and hottest week air temperature maximum and minimum values calculated from the Mt. Vernon 3NW dataset. These modified maximum and minimum air temperatures were then used for the 7Q2 and 7Q10 model inputs.

The average wind speed in riparian areas of the streams in the study area during July and August was estimated to be approximately 1 m/sec based on regional grids of long-term monthly average surface winds (Quigley et al., 2001).

Table 14. Comparison between air temperatures at Mt. Vernon 3NW and Ecology stations during 2001 calibration and verification periods.

WQ Station	8/12/2001 max recorded air temp (°C)	Mt. Vernon 3NW data temp (°C) max	Diff temp (°C)	8/12/2001 min recorded air temp (°C)	Mt. Vernon 3NW data temp (°C) min	Diff temp (°C)
03C04	21.6	27.8	6.2	11.6	10.6	-1.0
03C03	22.2	27.8	5.6	12	10.6	-1.4
03C02	21.6	27.8	6.2	13.8	10.6	-3.2
03C01	21.9	27.8	5.9	12.1	10.6	-1.5
03F02	23.02	27.8	4.8	11.69	10.6	-1.1
03F01	17.38	27.8	10.4	12.7	10.6	-2.1
03EF02	21.6	27.8	6.2	11.6	10.6	-1.0
03EF01	28	27.8	-0.2	11	10.6	-0.4
03H03	21	27.8	6.8	13	10.6	-2.4
03H02	25.2	27.8	2.6	11.5	10.6	-0.9
03H01	21	27.8	6.8	11.8	10.6	-1.2
03N04	26.2	27.8	1.6	11.1	10.6	-0.5
03N03	22.7	27.8	5.1	10.4	10.6	0.2
Knapp Rd	28.2	27.8	-0.4	10.39	10.6	0.2
Swan Rd	28.11	27.8	-0.3	9.79	10.6	0.8
03N01	18.12	27.8	9.7	10.61	10.6	0.0
			avg difference			
			-4.81	avg difference		
				-0.97		

WQ Station	8/18/2001 max recorded air temp (°C)	Mt. Vernon 3NW data temp (°C)	Diff temp (°C)	8/18/2001 min recorded air temp (°C)	Mt. Vernon 3NW data temp (°C)	Diff temp (°C)	
03C04	17.2	21.6	4.4	13.3	12.8	-0.5	
03C03	18.3	21.6	3.3	13.3	12.8	-0.5	
03C02	18.8	21.6	2.8	13.8	12.8	-1	
03C01	19.4	21.6	2.2	13	12.8	-0.2	
03F02	18.12	21.6	3.5	12.31	12.8	0.49	
03F01	16.2	21.6	5.4	12.99	12.8	-0.19	
03EF02	17.4	21.6	4.2	12.7	12.8	0.1	
03EF01	20.7	21.6	0.9	12.7	12.8	0.1	
03H03	17.7	21.6	3.9	12.4	12.8	0.4	
03H02	19.6	21.6	2.0	12	12.8	0.8	
03H01	17.6	21.6	4.0	13	12.8	-0.2	
03N04	18.8	21.6	2.8	13	12.8	-0.2	
03N03	18.7	21.6	2.9	13	12.8	-0.2	
Knapp Rd	21.49	21.6	0.1	12.88	12.8	-0.08	
Swan Rd	21.19	21.6	0.4	12.43	12.8	0.37	
03N01	17	21.6	4.6	13.08	12.8	-0.28	
			avg difference -2.96				avg difference -0.07

Riparian Vegetation and Effective Shade

In a study focusing on the adjacent Stillaguamish River watershed, Pess et al. (1999) reported that historic floodplain forests along the larger channels were a mix of deciduous and coniferous species. Nearly one third of the stems were Red alder, one third were other deciduous species (mainly big leaf maple and vine maple), and the remainder were coniferous species (mainly western hemlock, western Red cedar, and Sitka spruce). The largest trees in the riparian areas were mainly Sitka spruce and the smallest were mostly Red alder. Upland forests were predominantly coniferous species (mainly western hemlock, Douglas-fir, and western Red cedar).

Because of similar climate, geology, and elevation, the lower Skagit River study area was assumed to have similar historic riparian vegetation characteristics as those reported by Pess et al. (1999) in the Stillaguamish River watershed. According to the soil survey for Skagit County (USDA 1989), the most common trees on the riparian soils within the study area include Douglas fir, Western red cedar, Red alder, Big leaf maple, and some Western hemlock.

Effective shade produced by current riparian vegetation was estimated using Ecology's Shade model (Ecology, 2003; Figures 22-24). GIS coverages of riparian vegetation in the study area were created from information collected during the 2001 temperature study as described in Pelletier and Bilhimer (2001) and analysis of the most current digital orthophotos. Riparian forest coverages were created by qualifying four attributes: tree height, species and/or combinations of species, % vegetation overhang, and the average canopy density of the riparian forest.

All four attributes of vegetation in the riparian zone on the right and left bank were sampled from GIS coverages of the riparian vegetation along the stream at 100-meter intervals using the Ttools extension for Arcview that was developed by ODEQ (ODEQ, 2001). Other spatial data that were estimated at each transect location includes stream aspect, elevation within the riparian area, and topographic shade angles to the west, south and east.

For the TMDL load allocations, site potential riparian characteristics such as dominant species type and height were taken from soils information given in the Soil Survey of Skagit County (USDA 1989). The survey provides predominant species and site potential tree height for all riparian soils within the county. Predominant species are similar to those reported by Pess et al. in his characterization of historic riparian vegetation characteristics in the adjacent Stillaguamish River watershed.

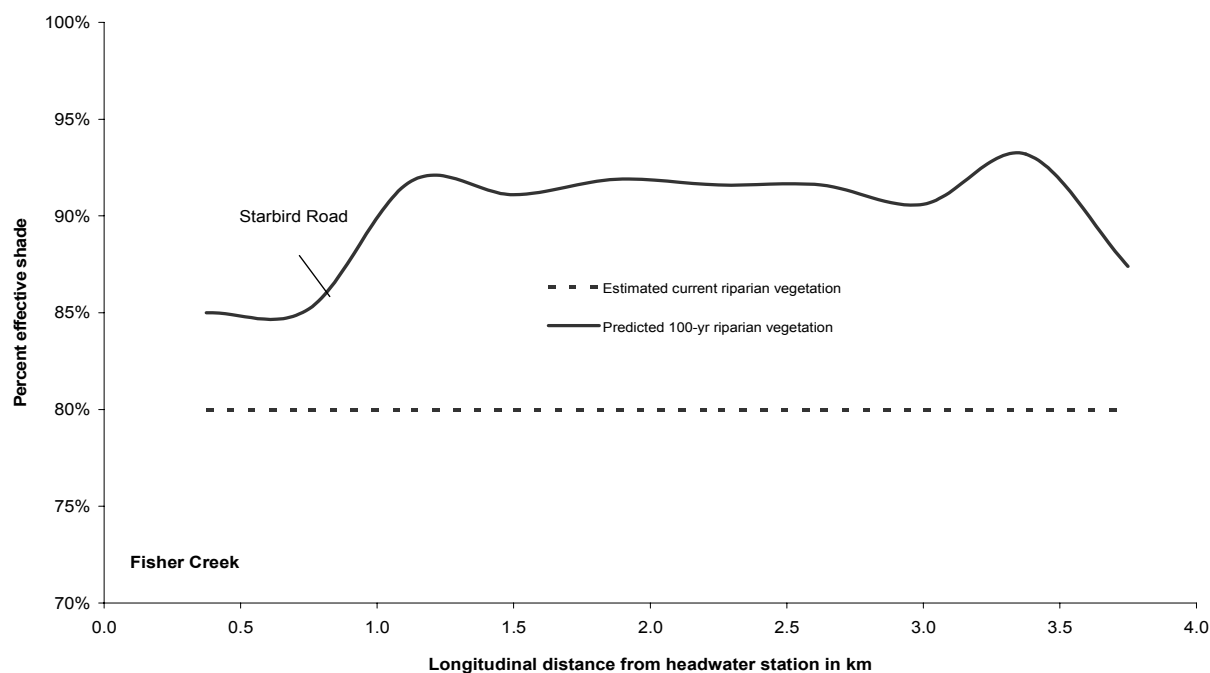
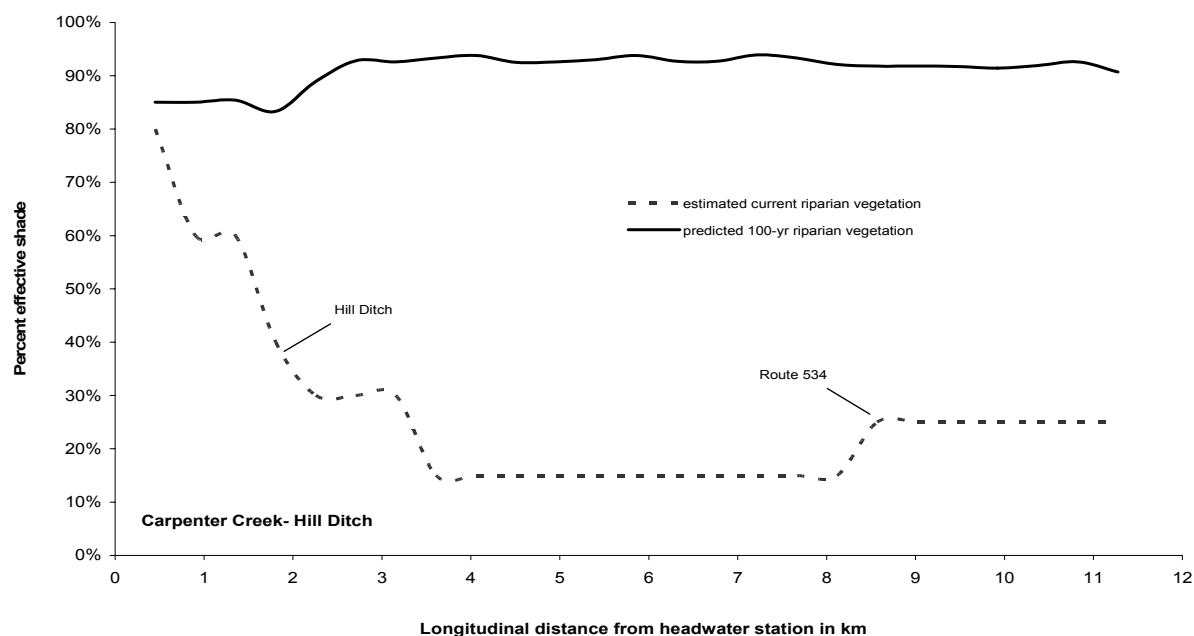


Figure 22. Effective shade from current and potential riparian vegetation in Carpenter Creek and Fisher Creek.

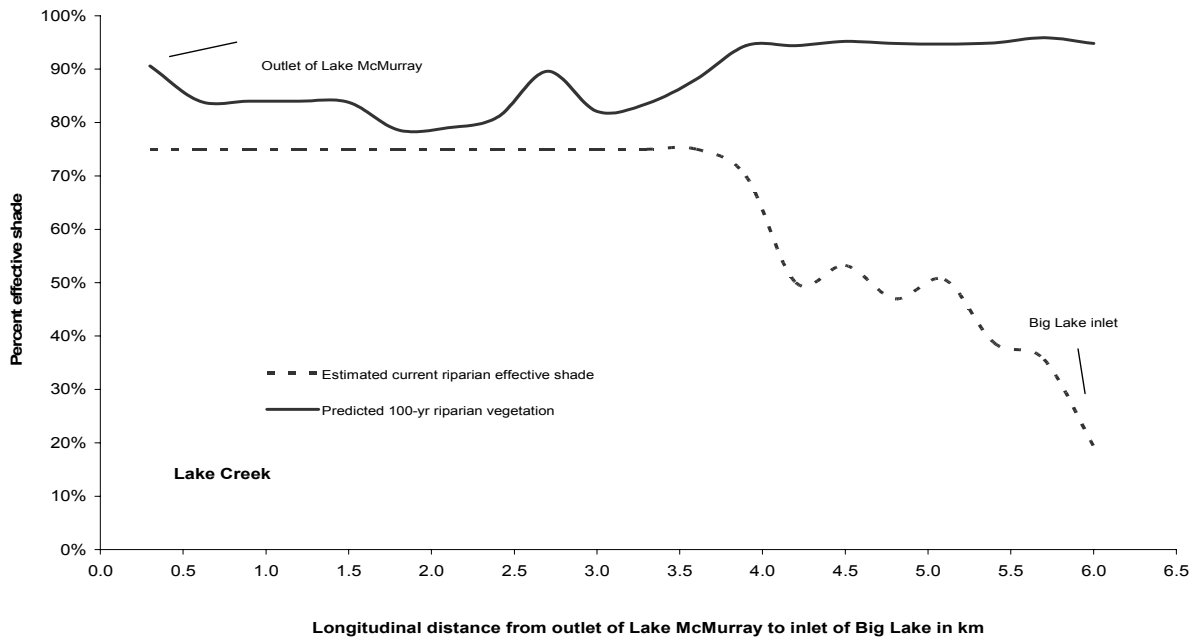
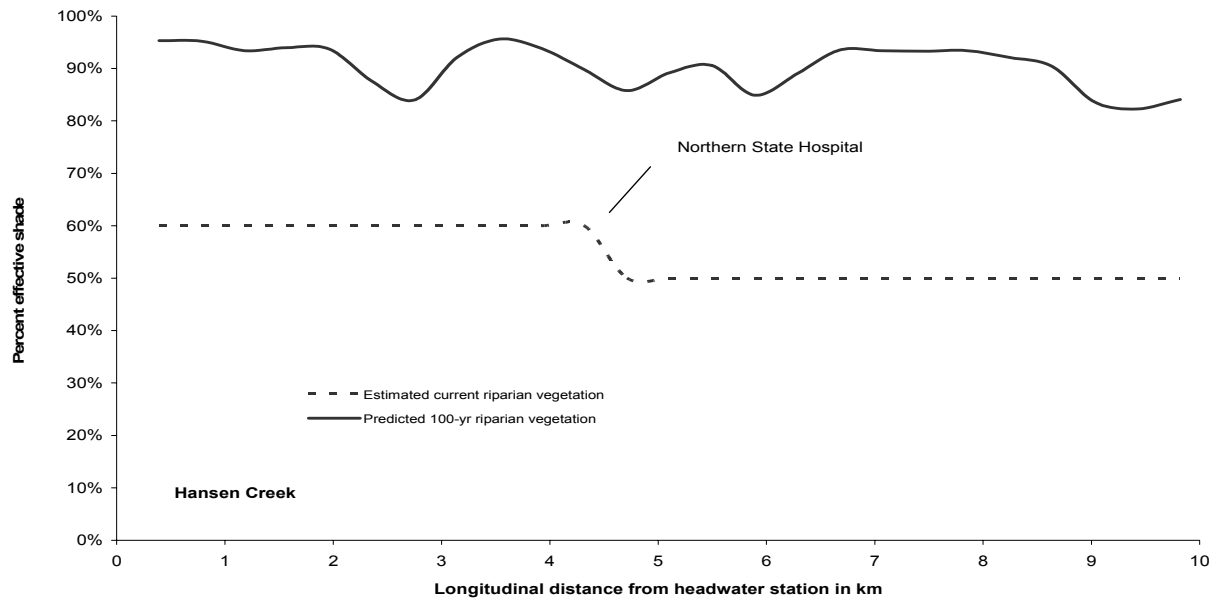


Figure 23. Effective shade from current and potential riparian vegetation in Hansen Creek and Lake Creek.

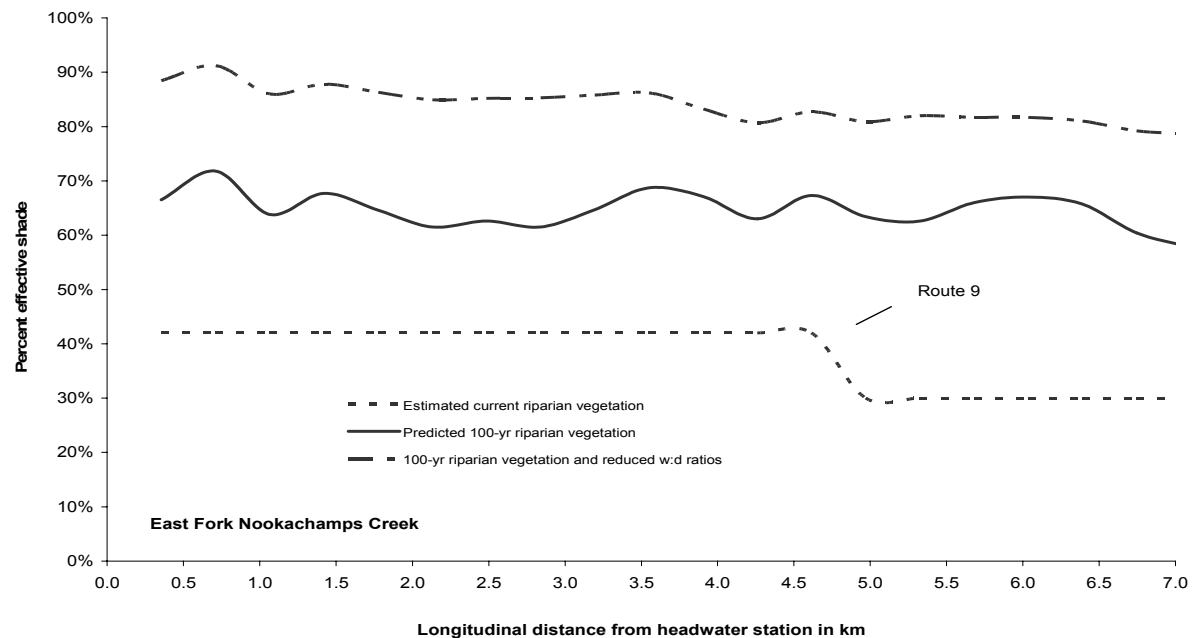
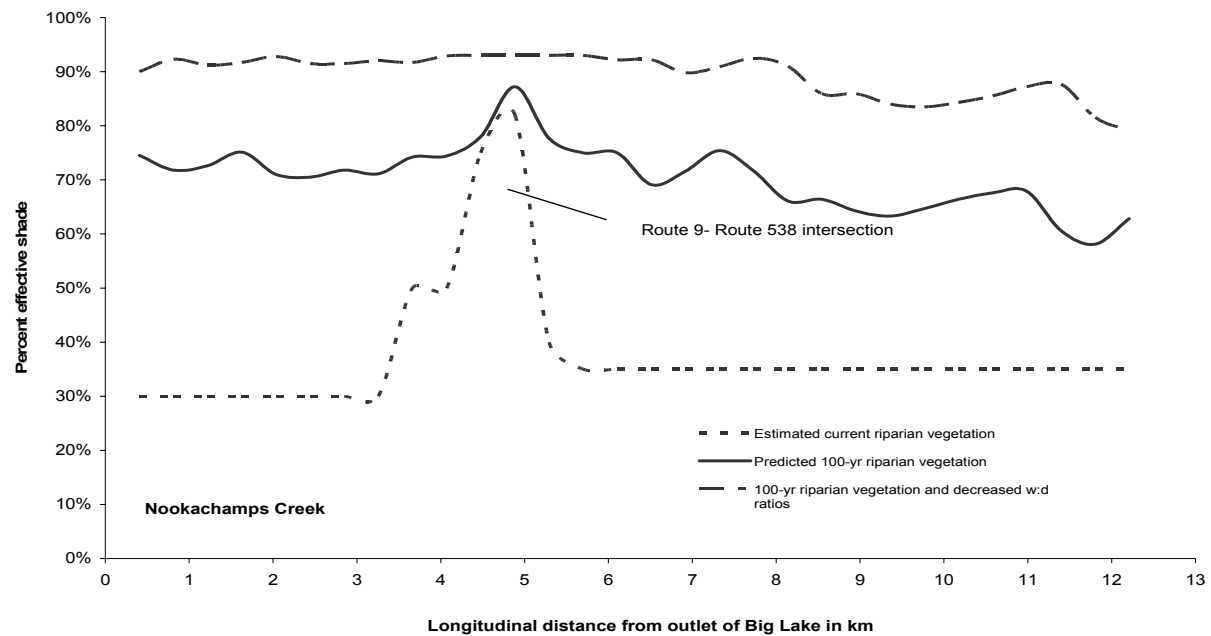


Figure 24. Effective shade from current and potential riparian vegetation in Nookachamps Creek and East Fork Nookachamps Creek.

Effective shade calculations were made for three scenarios of vegetation and channel geometry:

- **Current vegetation.** Estimates for current vegetation were based on spatial data for height and canopy density
- **Effective shade from 100-year riparian vegetation.** The average height of trees for 100-year old riparian vegetation was taken from the USDA Soil Survey for Skagit County. Riparian vegetation consisted of mixed deciduous and coniferous species in the floodplain and assumed to have average tree heights ranging from 28-38 meters and an average canopy density of 75%.
- **Effective shade from mature riparian vegetation and reduced channel width.** Effective shade from a combination of 100-yr old riparian vegetation and reductions in the current width to depth ratios that may occur in portions of Nookachamps Creek and East Fork Nookachamps Creek, as elsewhere in the study area.

Analytical Framework

Data collected during this TMDL effort has allowed the development of a temperature simulation methodology that is both spatially continuous and which spans full-day lengths (quasi-dynamic steady-state diel simulations). The GIS and modeling analysis was conducted using three specialized software tools:

- ODEQ's Ttools extension for Arcview (ODEQ, 2001) was used to sample and process GIS data for input to the HeatSource and QUAL2K models. Appendices B1 and B2 list the codes and descriptions of current and site potential vegetation used in the HeatSource model.
- Ecology's Shade model (Ecology, 2003a) was used to estimate effective shade along six of the lower Skagit River tributaries. Effective shade was calculated along the mainstems of Carpenter Creek, Fisher Creek, Hansen Creek, Lake Creek, Nookachamps Creek, and East Fork Nookachamps Creek using the Shade model. Effective shade was calculated at intervals ranging from 30 meters to 100 meters along the streams and then averaged over 300 to 400-meter intervals for input to the QUAL2K model.
- The QUAL2Kw model (Chapra, 2001; Ecology, 2003b) was used to calculate the components of the heat budget and simulate water temperatures. QUAL2Kw simulates diurnal variations in stream temperature for a steady flow condition. QUAL2Kw was applied by assuming that flow remains constant for a given condition such as a 7-day or 1-day period, but key variables are allowed to vary with time over the course of a day. For temperature simulation, the solar radiation, air temperature, relative humidity, headwater temperature, and tributary water temperatures were specified or simulated as diurnally varying functions. QUAL2Kw uses the kinetic formulations for the components of the surface water heat budget that are shown in Figure 2 and described in Chapra (1997). Diurnally varying water temperatures at 300 to 500-meter intervals along the streams in the lower Skagit River study area were simulated using a finite difference numerical method. The water temperature model was calibrated to in-stream data along the mainstems of the streams.

All input data for the Shade and QUAL2Kw models are longitudinally referenced, allowing spatial and/or continuous inputs to apply to certain zones or specific river segments. Model input data were determined from available GIS coverages using the Ttools extension for Arcview, or from data collected by Ecology or other data sources. Detailed spatial data sets were developed for the following parameters for model calibration and verification:

- Rivers and tributaries were mapped at 1:3,000 scale (or less) from 1-meter-resolution Digital Orthophoto Quads (DOQ).
- Riparian vegetation species, size, and density were mapped and sampled from the GIS coverage along the stream at 100-meter intervals along the streams in the study area.
- Near-stream disturbance zone (NSDZ) widths were digitized at 1:3000 scale (or less).
- West, east, and south topographic shade angle calculations were made from the 10-meter DEM grid using ODEQ's Ttools extension for Arcview.
- Stream elevation and gradient were sampled from the 10-meter DEM grid with the Arcview Ttools extension. Gradient was calculated from the longitudinal profiles of elevation from the 10-meter DEM.
- Aspect (stream flow direction in decimal degrees from north) was calculated by the Ttools extension for Arcview.
- The daily minimum and maximum observed temperatures for the boundary conditions at the headwaters and tributaries were used as input to the QUAL2Kw model for the calibration and verification periods. The QUAL2Kw model was calibrated and verified using data collected during August 9-15, 2001 and August 17-20, 2001 respectively (Figures 24-29).
- Flow balances for the calibration and verification periods were estimated from field measurements and gage data of flows made by Ecology. The lowest 7-day-average flows during the July-August period with recurrence intervals of 2 years (7Q2) and 10 years (7Q10) were estimated based on low flow statistics from the USGS gaging station in the adjacent Pilchuck Creek basin. The 7Q2 and 7Q10 flows in the study area were then estimated by scaling the estimates at the USGS gage according to the sub-watershed areas weighted by annual average precipitation. Flow balance spreadsheets of the stream networks for Carpenter Creek, Fisher Creek, Hansen Creek, Lake Creek, Nookachamps Creek, and East Fork Nookachamps Creek were constructed to estimate surface water and groundwater inflows by interpolating between the stream gaging stations.
- Hydraulic geometry (wetted width, depth, and velocity as a function of flow) was estimated using the equations developed in Table 10. Manning's equation was used to estimate channel depth and velocity (Table 11).

- The temperature of groundwater is often assumed to be similar to the mean annual air temperature (Theurer et al, 1984). The mean annual air temperature along the streams in the lower Skagit River study area ranges from approximately 11.2°C at low elevation to about 6° C at the highest elevations. Because there is very limited data, and most of the modeled reaches lie in the lowest elevations, a mean groundwater temperature of 11.2°C was used in the QUAL2Kw model.
- Air temperature, relative humidity, and cloud cover were estimated from meteorological data collected by Ecology. The observed minimum and maximum air temperatures and relative humidity at the stations occupied by Ecology during the study year were used to represent the conditions for the calibration and verification periods. Cloud cover for the calibration and verification periods was estimated from data reported at the Mt. Vernon weather station. A cloud cover of 40% was used for the calibration period and 60% was used for the verification period. The average July-August wind speed of 1 m/sec was used for temperature modeling.
- Heat exchange between the water and the stream bed is simulated in QUAL2Kw by two processes: 1) conduction according to Fick's law is estimated as a function of the temperature gradient between the water and surface sediment, thickness of the surface sediment layer, and the thermal conductivity which is a function of thermal diffusivity, sediment density, and sediment heat capacity, and 2) hyporheic exchange is estimated as a function of the temperature gradient between the water and surface sediment and the bulk diffusive flow exchange between the water and the stream bed, the thickness of the surface sediment layer, the density and heat capacity of water. Calibration of the QUAL2Kw model involved specification of the thickness of the surface sediment layer in the range of 10 cm to 100 cm and specification of the bulk diffuse flow exchange between the water and the stream bed between 0 and 100 percent of the surface flow in a stream reach. Typical values for the thermal diffusivity at the sediment surface ranged from 0.0045 cm²/sec to 0.0150 cm²/sec, which is similar to the literature values summarized by Sinokrot and Stefan (1993) for typical streambed materials.

Calibration and Verification of the QUAL2k Model

The hottest 7-day period of 2001 occurred from August 9-15, 2001 and was used for calibration of the QUAL2Kw model (Figures 25-30). The August 17-20, 2001 period was used for verification of the QUAL2Kw model to test the calibration (Figures 25-30).

The uncertainty or goodness-of-fit of the predicted temperatures from the QUAL2Kw model was evaluated by calculating the root mean squared error (RMSE) of the predicted versus observed maximum and minimum temperatures (Table 15). The average maximum RMSE for the calibration period was 0.56°C. The average maximum RMSE for the verification period was 0.44°C. In general, the error of the models predictions is less than one degree C, and slightly greater for Carpenter Creek.

Table 15. Summary of RMSE of differences between the predicted and observed daily maximum temperatures in the lower Skagit River study area.

Modeled stream	RMSE for the calibration period of August 12-18, 2001 (deg C)		RMSE for the verification period of August 24-30, 2001 (deg C)	
	max	min	max	min
Carpenter Creek	0.72	1.14	0.26	1.41
Fisher Creek	0.66	0.25	0.55	0.42
Hansen Creek	0.51	0.61	0.77	0.67
Lake Creek	0.58	0.35	0.17	0.74
Nookachamps Creek	0.73	0.59	0.71	0.85
East Fork Nookachamps Creek	0.17	0.70	0.25	0.92

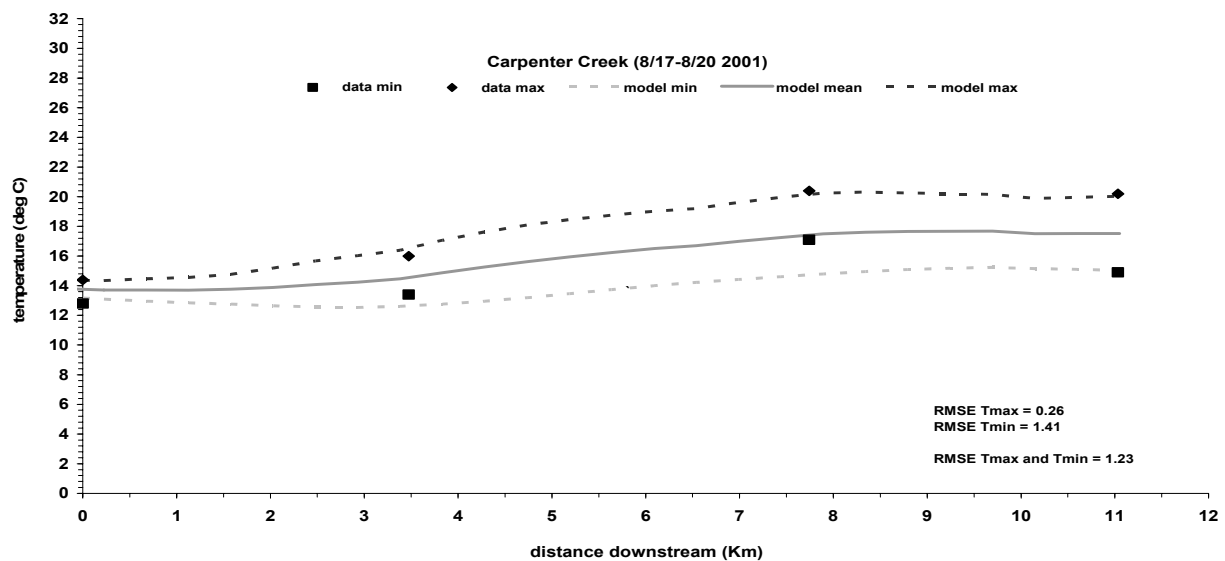
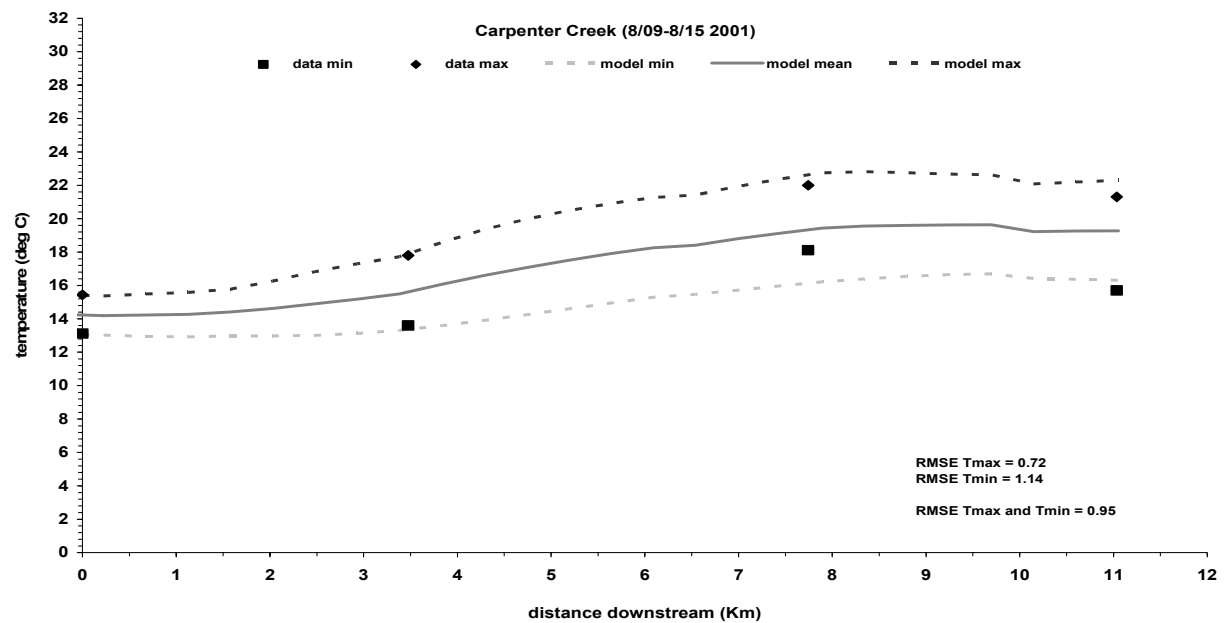


Figure 25. Predicted and observed water temperatures in Carpenter Creek during calibration and verification periods.

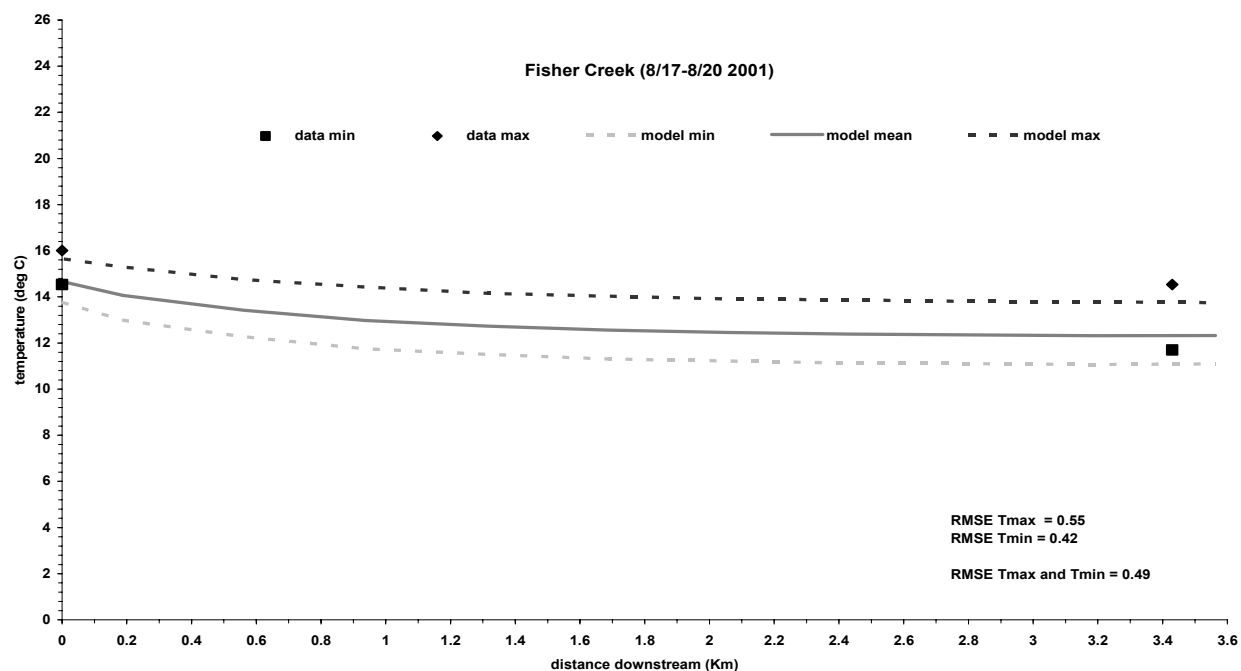
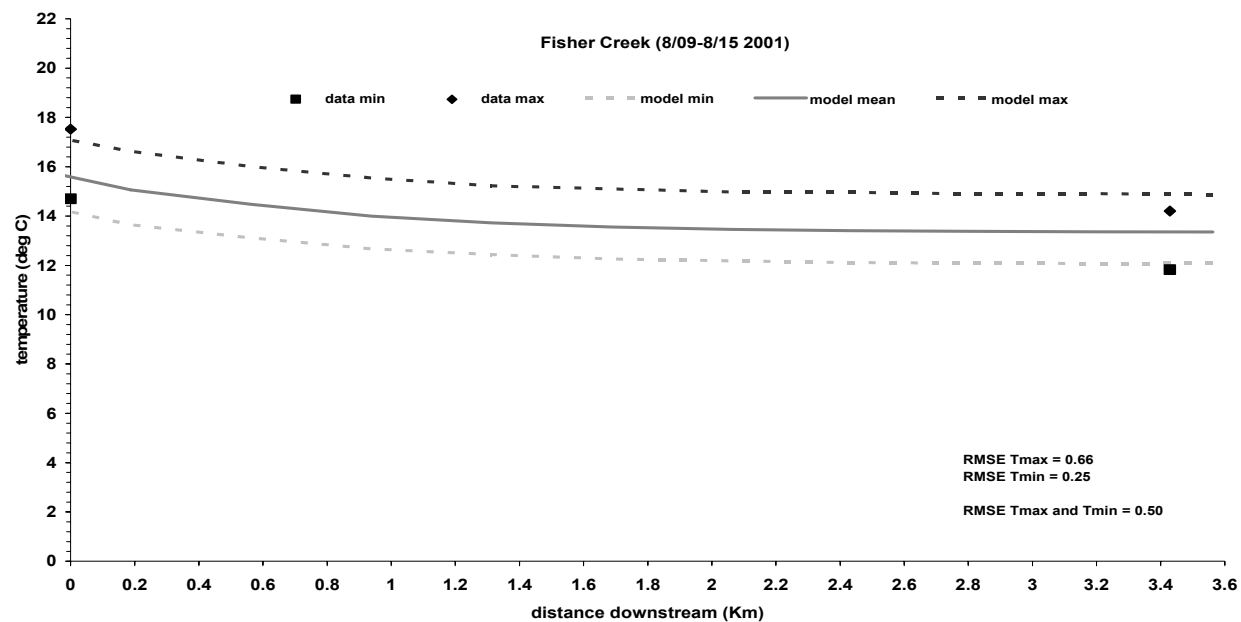


Figure 26. Predicted and observed water temperatures in Fisher Creek during calibration and verification periods.

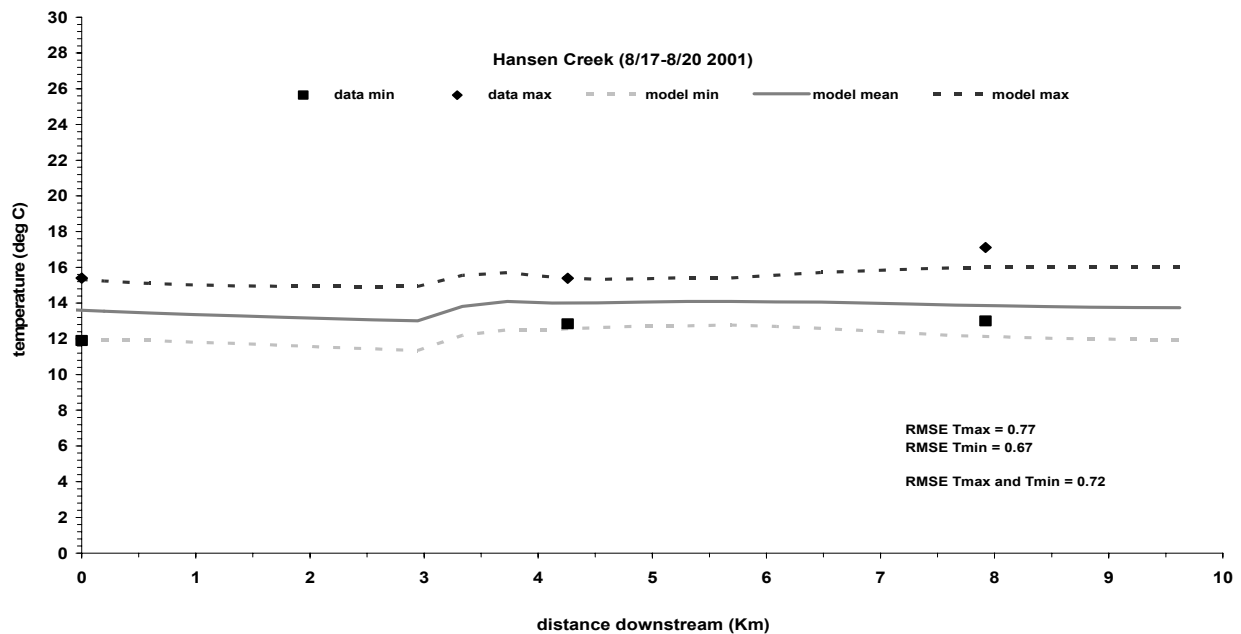
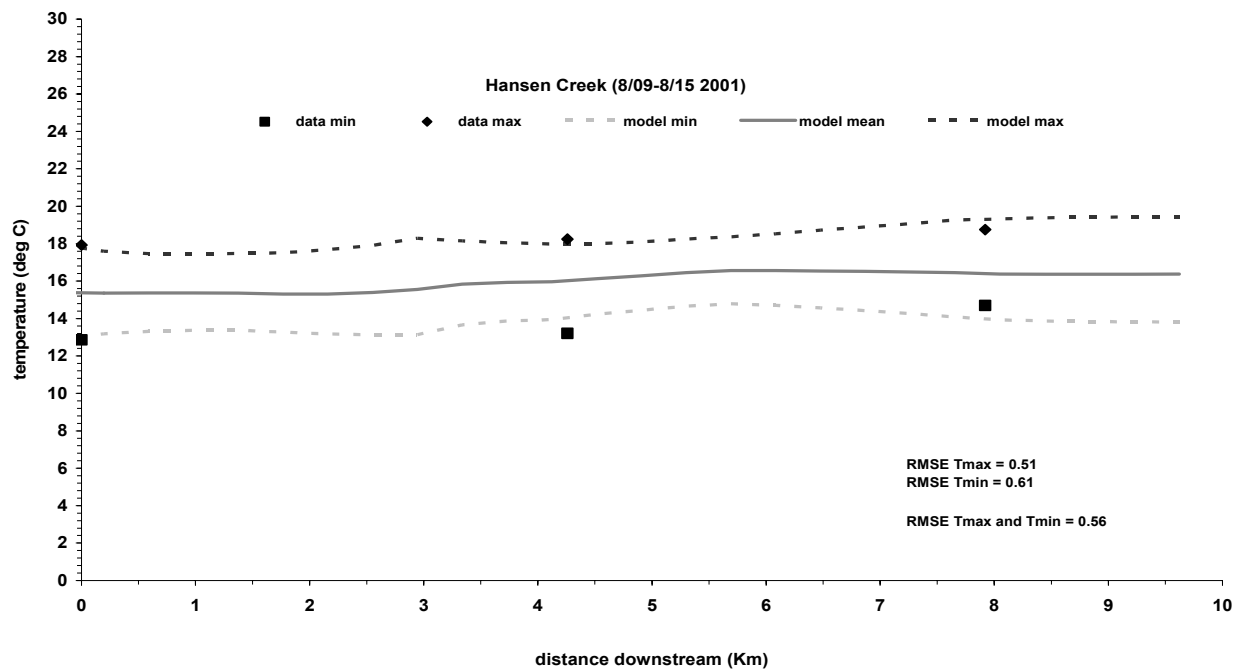


Figure 27. Predicted and observed water temperatures in Hansen Creek during calibration and verification periods.

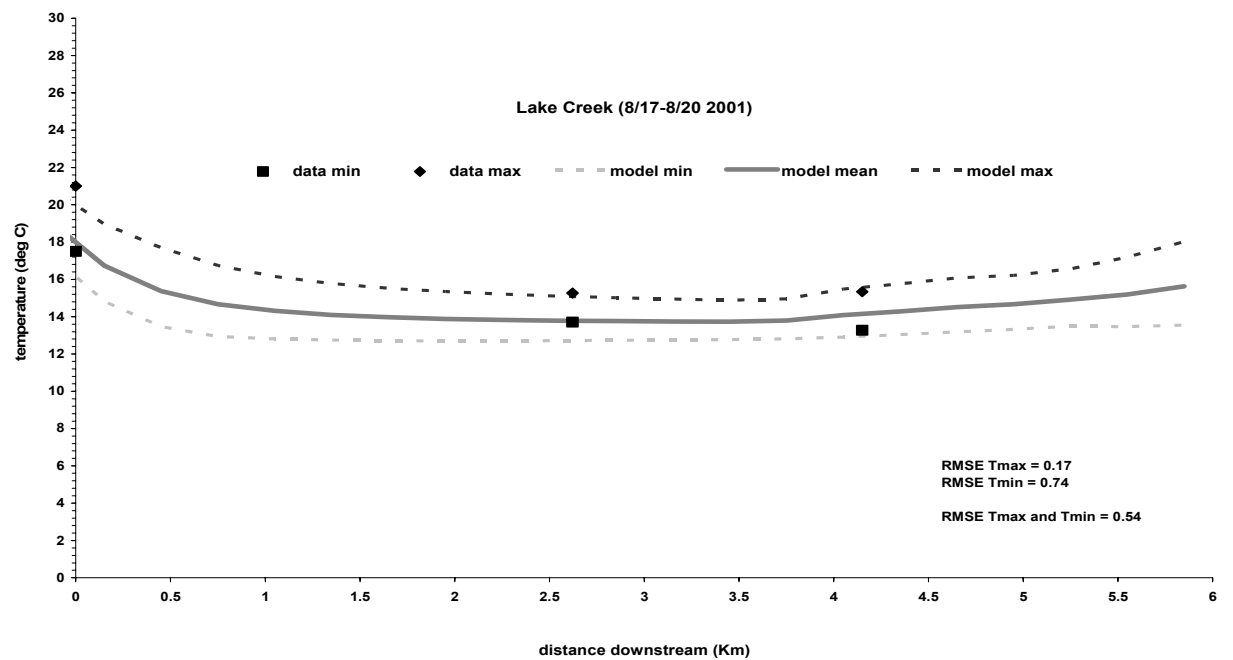
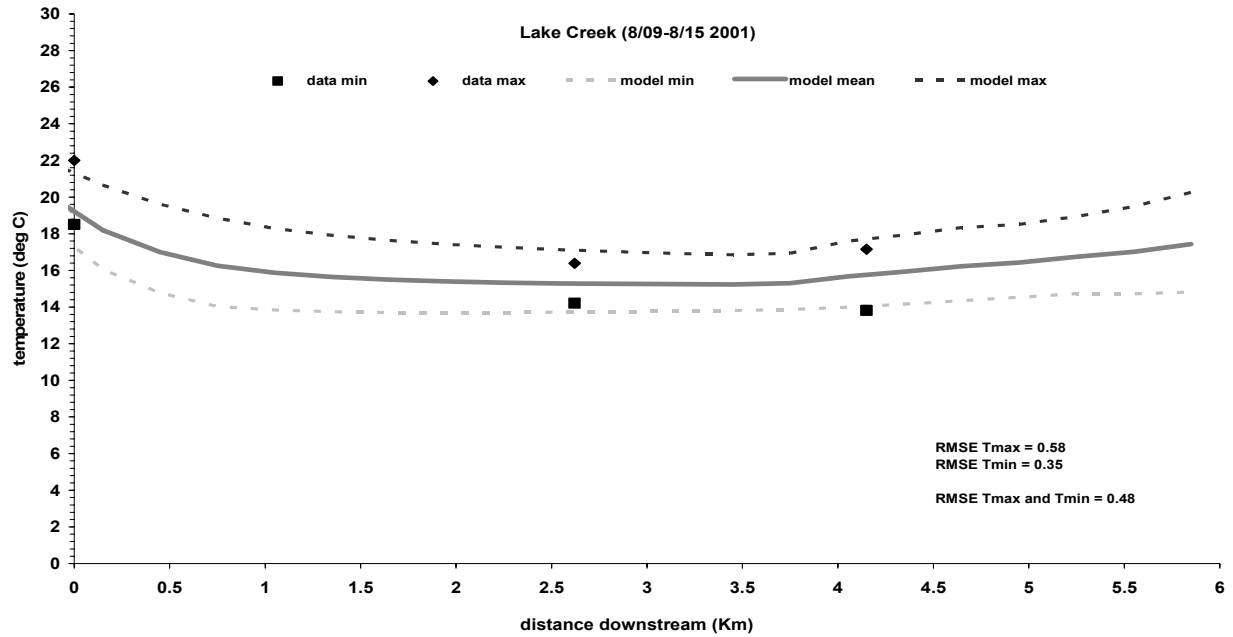


Figure 28. Predicted and observed water temperatures in Lake Creek during calibration and verification periods.

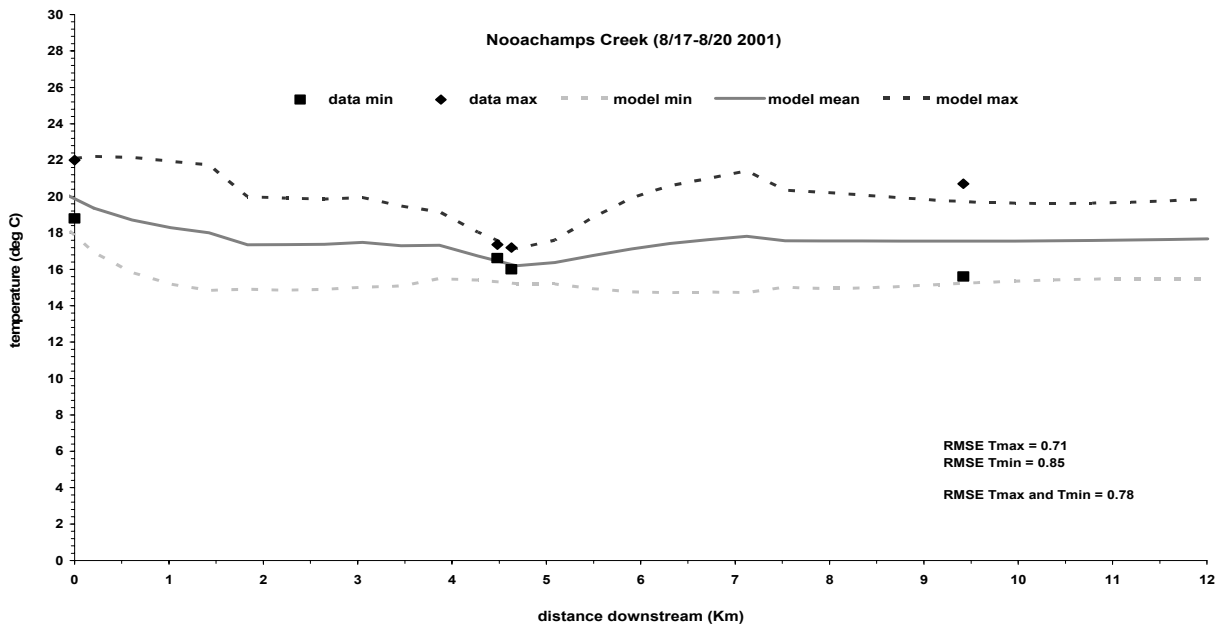
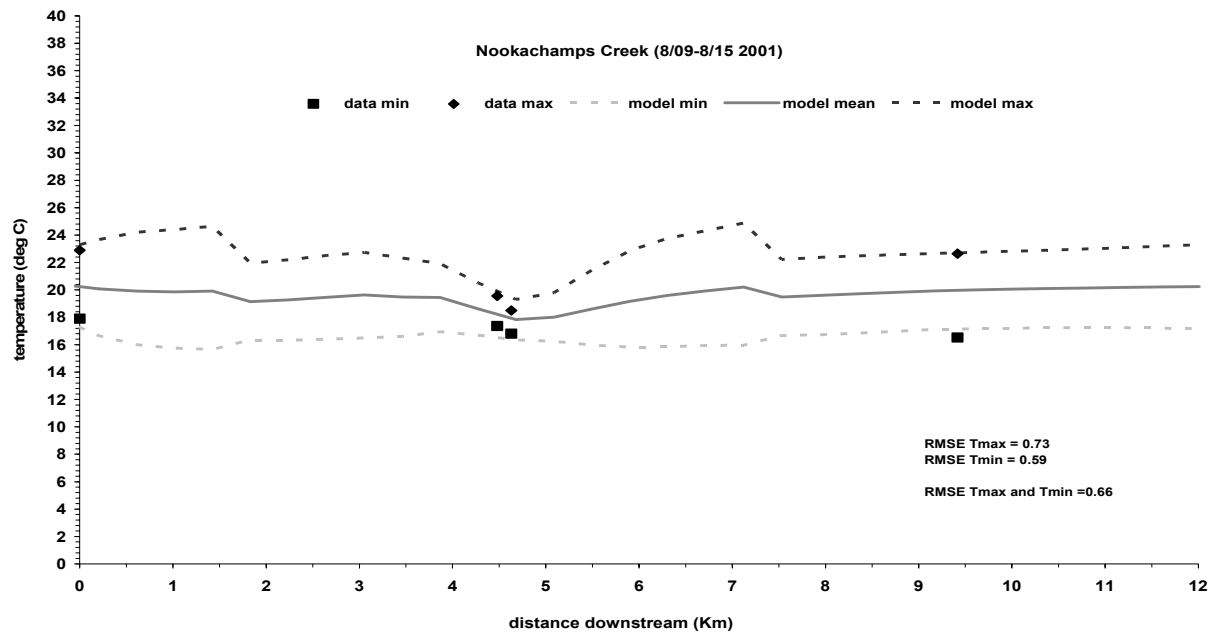


Figure 29. Predicted and observed water temperatures in Nookachamps Creek during calibration and verification periods.

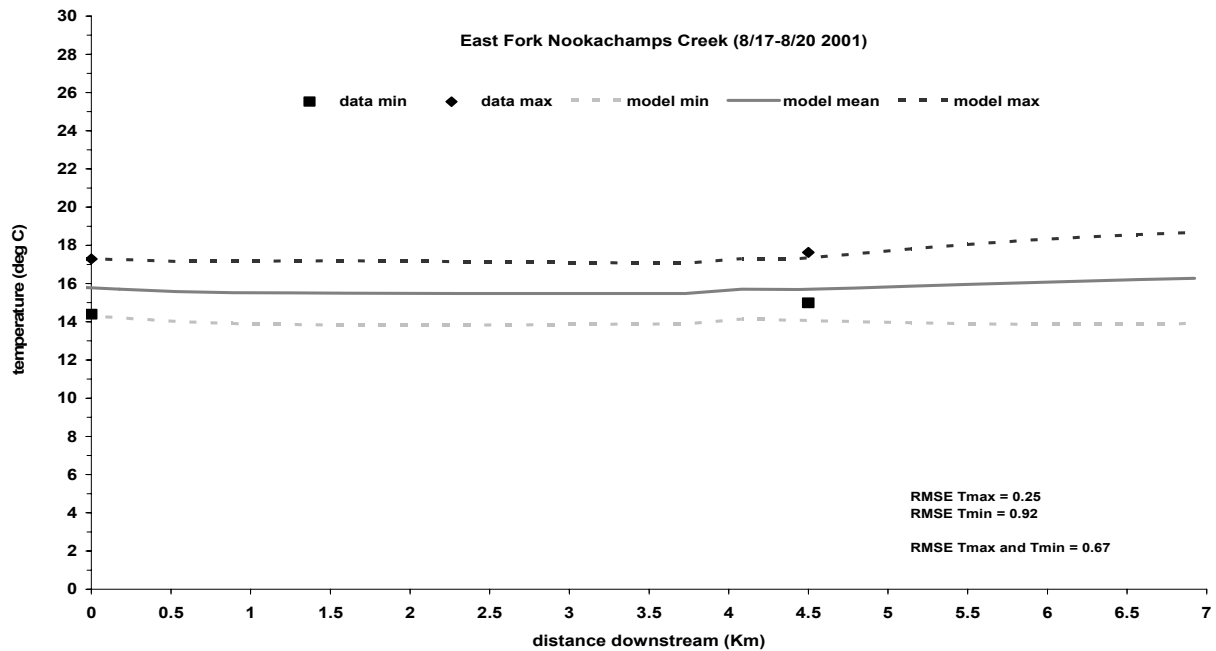
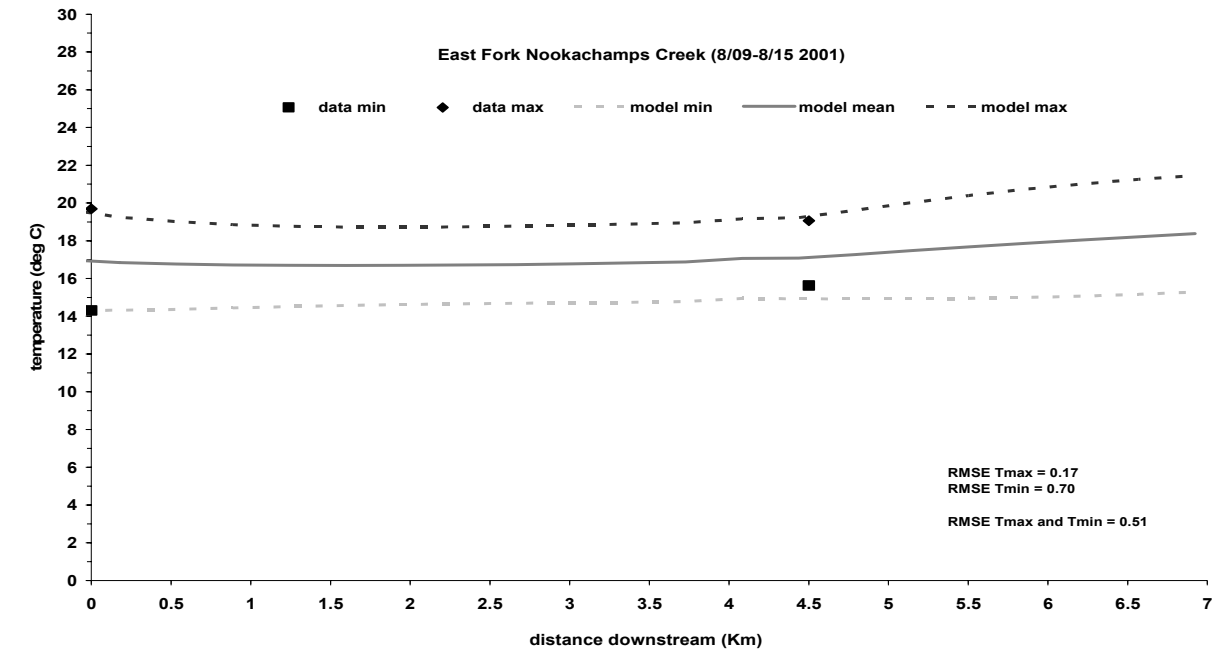


Figure 30. Predicted and observed water temperatures in East Fork Nookachamps Creek during calibration and verification periods.

Loading Capacity

The loading capacity provides a reference for calculating the amount of pollutant reduction needed to bring a waterbody into compliance with standards. EPA's current regulation defines loading capacity as *"the greatest amount of loading that a waterbody can receive without violating water quality standards."* The loading capacity for this TMDL is based on the condition that meets the *"temperature shall not exceed 18.0°C....due to human activities"* portion of the temperature standards. The pollutants in the lower Skagit study area are human-caused increases in solar radiation and concomitant decreases in effective shade. The lack of effective shading has resulted from the removal of trees throughout the study area, and a subsequent widening of stream channels.

The calibrated QUAL2K model was used to determine the loading capacity for effective shade for streams in the lower Skagit River basin. Loading capacity was determined based on prediction of water temperatures under typical and extreme flow and climate conditions combined with effective shade conditions resulting from 100-yr old riparian vegetation and decreases in channel width to depth ratios.

The lowest 7-day average flow with a 2-year recurrence interval (7Q2) was selected to represent a typical climatic year, and the lowest 7-day average flow with a 10-year recurrence interval (7Q10) was selected to represent a reasonable worst-case condition for the July-August period. Air temperatures for the 7Q2 condition were assumed to be represented by the hottest week of 1986, which was the median condition from the historical record at Mount Vernon 3NW (Table 7). The air temperatures for the 7Q10 condition were taken from the hottest week of 1967, which was the 90th percentile condition from Mount Vernon 3NW.

The following scenarios for effective shade were evaluated for the 7Q2 and 7Q10 flow and climate conditions:

- Effective shade resulting from the existing riparian vegetation and channel conditions.
- Effective shade from 100-yr old riparian vegetation that would naturally occur in riparian areas within the study area. Riparian species were chosen based on soil site potential, as given in the Soil Survey for Skagit County, WA. (USDA 1989). The predominant tree species on all soils within the study area included Red alder, Western Red cedar, and Douglas fir.

A canopy density of 75% was used for all site potential vegetation (Brazier et al. 1973 and Steinblums et al. 1984). Tree heights (at 100 yr site index) ranged from 28 to 37 meters. Riparian zone widths were estimated as 75% of average tree height (FEMAT 1993) and ranged from 23-28 meters.

- Effective shade from 100-yr old riparian vegetation and a decrease in channel width for modeled segments of Nookachamps Creek and East Fork Nookachamps Creek. It is likely that 100-yr old vegetation and associated riparian functions of moderate-aged riparian stands would result in concomitant decreases in width to depth ratios. Channel widths are expected to decrease as the maturing riparian vegetation along the stream stabilizes the streambanks and prevents lateral erosion.

Changes in riparian microclimate, decreases in channel width, and reduction of headwater and tributary temperatures were incorporated into the predictions of water temperatures within the study area:

- **Microclimate.** Increases in vegetation height and density in the riparian zone are expected to result in decreases in air temperature, increases in relative humidity, and decreases in wind speed. In order to evaluate the effect of these potential changes in microclimate on water temperature, the air temperature, relative humidity, and wind speed in the riparian areas for scenarios with maximum potential shade from mature riparian were adjusted relative to the estimated current condition as follows:
 - Based on the study by Dong et al. (1998): average air temperatures within the modeled reaches were decreased by 1 °C;
 - Maximum relative humidity remained constant at 100%. Minimum relative humidity ranged from 70-80%.
 - Wind speed was reduced to 0 or 1m/sec.
- **Channel width.** Channel widths are expected to decrease as the riparian vegetation along the stream matures due to reduced loading of sediment from unstable banks. The sensitivity of predicted stream temperatures to reduction of channel width was tested by predicting stream temperatures that would be associated with decreasing bankfull channel widths by 1/3 in Nookachamps Creek and East Fork Nookachamps Creek.
- **Reduced headwater and tributary temperatures.** Scenarios were evaluated with the assumption that the inflowing headwaters and tributaries did not exceed the 18 °C (for class A waters).

The results of the model runs for the critical 7Q2 and 7Q10 conditions are presented in Figures 31 through 36. The current conditions in the lower Skagit study area are expected to result in daily maximum water temperatures that are greater than 18 °C in all or most of the evaluated reaches. Temperatures in portions of Carpenter Creek, Lake Creek, Nookachamps Creek, and East Fork Nookachamps Creek could be greater than the approximate threshold for lethality of 23 °C under current conditions.

Substantial reductions in water temperature are predicted for hypothetical conditions with 100-yr old riparian vegetation and concomitant changes in riparian microclimate and reduction of channel widths. Potential reduced temperatures are predicted to be less than 18 °C in class A reaches in most of the streams that were evaluated. Those segments not expected to be less than the 18°C standard comprise the outlets of Lake Mc Murray and Big Lake. Surface water temperatures in both Big Lake and Lake Mc Murray frequently exceed 22°C during the summer months.

Carpenter Creek

Figure 31 shows the predicted water temperatures in Carpenter Creek and Hill Ditch for the lowest 7-day average flow during July-August with a 2-year recurrence interval (7Q2) and a 10-year recurrence interval (7Q10). Figure 31 shows that increases in effective shade resulting from 100-yr old riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the mainstem of Carpenter Creek and Hill Ditch. Those portions of Carpenter Creek upstream of the modeled segments have a loading capacity set to equal the effective shade produced by 100-yr old riparian vegetation within the riparian corridor.

Fisher Creek

Figure 32 shows the predicted water temperature in Fisher Creek for the 7Q2 and 7Q10 conditions. Increases in effective shade from 100-yr old riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the lower portions of Fisher Creek. Those portions of Fisher Creek upstream of the modeled segments have a loading capacity set to equal the effective shade produced by 100-yr old riparian vegetation within the riparian corridor.

Hansen Creek

Figure 33 shows the predicted water temperatures in Hansen Creek for the 7Q2 and 7Q10 conditions. Effective shade from 100-yr old riparian potential riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the mainstem of Hansen Creek. Those portions of Hansen Creek upstream of the modeled segments have a loading capacity set to equal the effective shade produced by 100-yr old riparian vegetation within the riparian corridor.

Skagit County has drafted a Watershed Management Plan for Hansen Creek , which includes measures to restore historic channel morphology, reduce current width to depth ratios, and re-establish connectivity between the floodplain and stream channel. The Hansen Creek plan, currently a ‘concept plan’, presents alternative solutions that address sediment loading from upstream sources. In past years, downstream flooding has been addressed through the periodic dredging of the stream channel, which is no longer desirable due to effects on fish habitat. The plan identifies reaches of the creek system that could be re-engineered and restored to provide sediment storage and return downstream areas to riparian condition more supportive of fish habitat. These proposed alternatives should be examined in detail to determine which would provide the overall greatest benefit with respect to stream temperature and fish habitat.

Red Creek, a tributary to Hansen Creek, has a loading capacity set equal to the effective shade produced by 100-yr old riparian vegetation.

Lake Creek

Figure 34 shows the predicted water temperatures in Lake Creek for the 7Q2 and 7Q10 conditions. Effective shade resulting from 100-yr old riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the majority of the mainstem of Lake Creek. Lake McMurray, a shallow lake (< 2 m at outlet) comprises the headwaters of Lake Creek. Summer outflow temperatures frequently exceed the Class A standard for temperature. Figure 34 shows resulting water temperatures in Lake Creek with the addition of 100-yr old riparian vegetation along the mainstem. Figure 34 shows that the highest water temperatures (exceeding 18° C) in Lake Creek are expected to remain at the outflow of Lake McMurray, even with increases in riparian vegetation.

Nookachamps Creek

Figure 35 shows the predicted water temperatures in Nookachamps Creek for the 7Q2 and 7Q10 conditions. Effective shade resulting from 100-yr old riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the majority of the mainstem of Nookachamps Creek.

Big Lake, a shallow lake (< 2 m at outlet) comprises the headwaters of Nookachamps Creek. Summer outflow temperatures frequently exceed the Class A standard for temperature. Figure 35 shows resulting water temperatures in Nookachamps Creek with the addition of 100-yr old riparian vegetation along the mainstem. Figure 35 shows that the highest water temperatures (exceeding 18° C) in Nookachamps Creek are expected to remain at the outflow of Big Lake, even with increases in riparian vegetation.

Much of the Nookachamps mainstem downstream of Route 9 and Route 538 intersection has been channelized and diked and currently supports little or no riparian vegetation. Reductions of stream width-to-depth ratios are recommended for these sections of Nookachamps Creek to further reduce the water temperatures and produce water temperatures that meet the Class A temperature standard during 7Q10 critical conditions of flow and climate.

Otter Pond Creek, a tributary to Nookachamps Creek, has a loading capacity set equal to the effective shade produced by 100-yr old riparian vegetation.

East Fork Nookachamps Creek

Figure 36 shows the predicted water temperatures in East Fork Nookachamps Creek for the 7Q2 and 7Q10 conditions. Effective shade resulting from 100-yr old riparian vegetation and associated changes in microclimate have the potential to produce water temperatures that would meet the water quality standard in the majority of the mainstem of East Fork Nookachamps Creek. Those portions of East Fork Nookachamps Creek upstream of the modeled segments have a loading capacity set to equal the effective shade produced by 100-yr old riparian vegetation within the riparian corridor.

Nearly the entire modeled segment of the East Fork has been channelized and diked and currently supports little or no riparian vegetation. Reductions of stream width-to-depth ratios are recommended for these sections of East Fork Nookachamps Creek to further reduce the water temperatures and produce water temperatures that meet the Class A temperature standard during 7Q10 critical conditions of flow and climate.

Turner Creek, a tributary to East Fork Nookachamps Creek, has a loading capacity set equal to the effective shade produced by 100-yr old riparian vegetation along the riparian corridor.

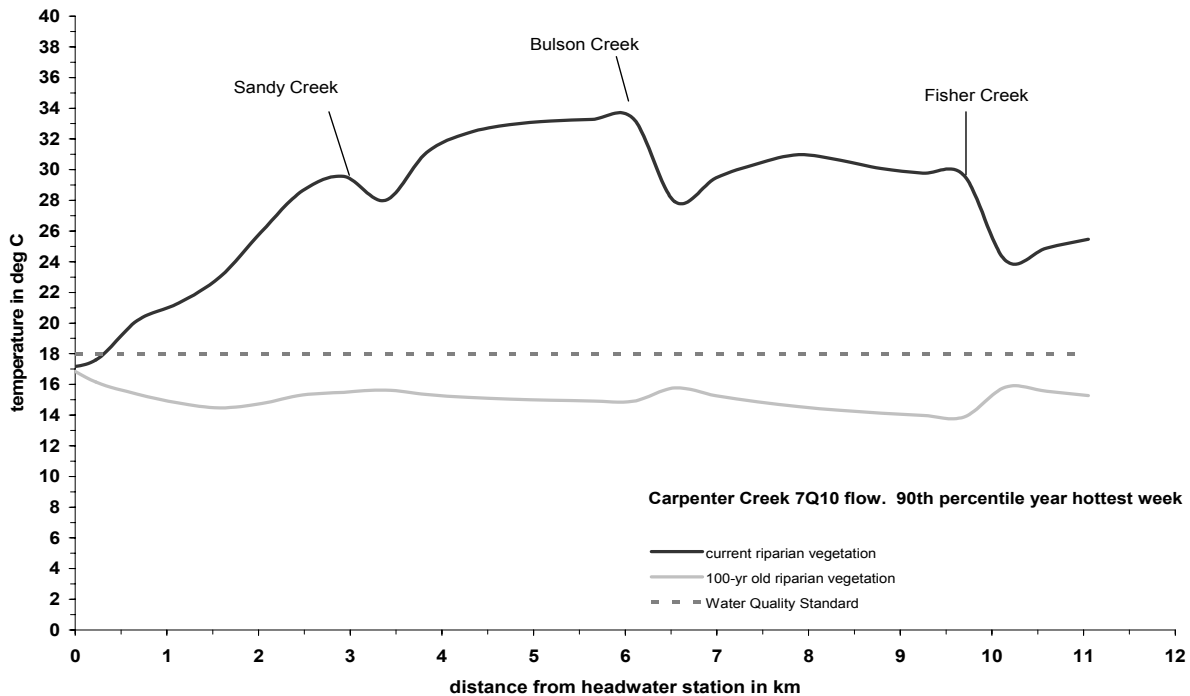
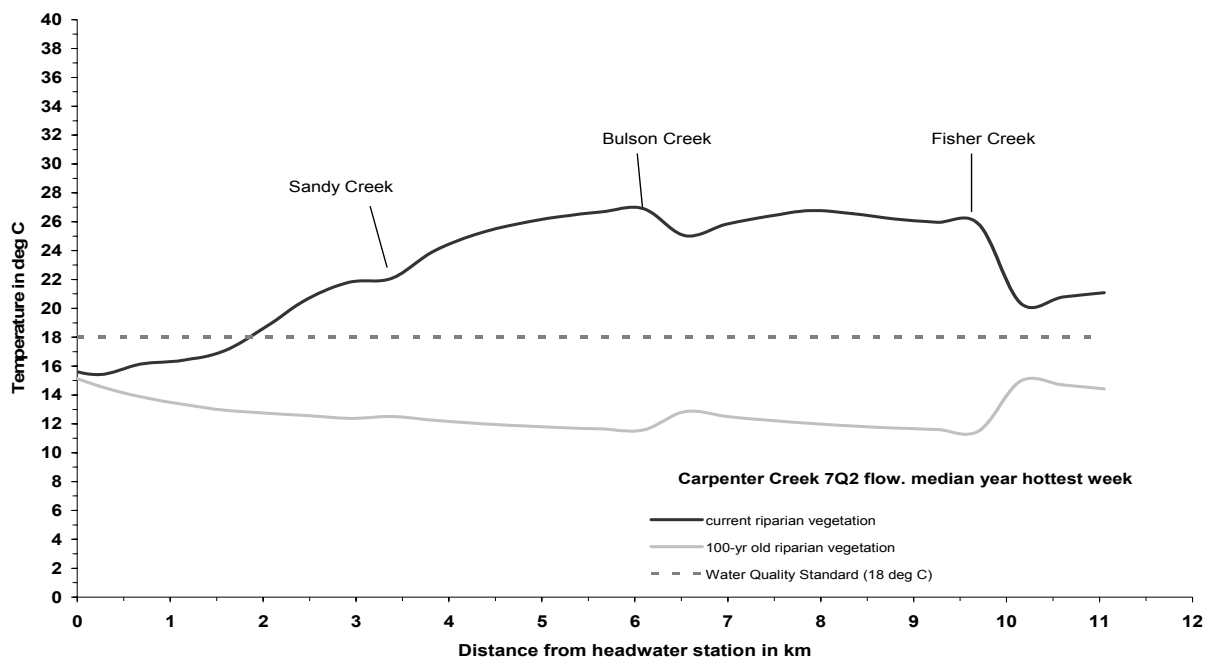


Figure 31. Predicted daily maximum temperature in Carpenter Creek under critical conditions for the TMDL.

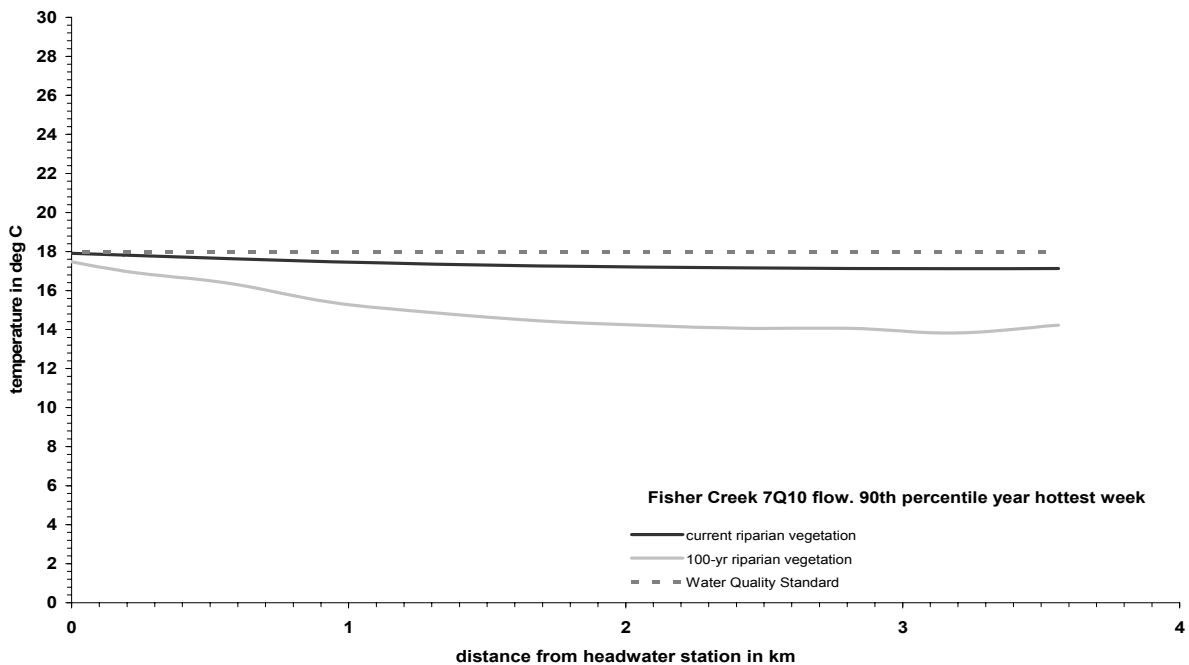
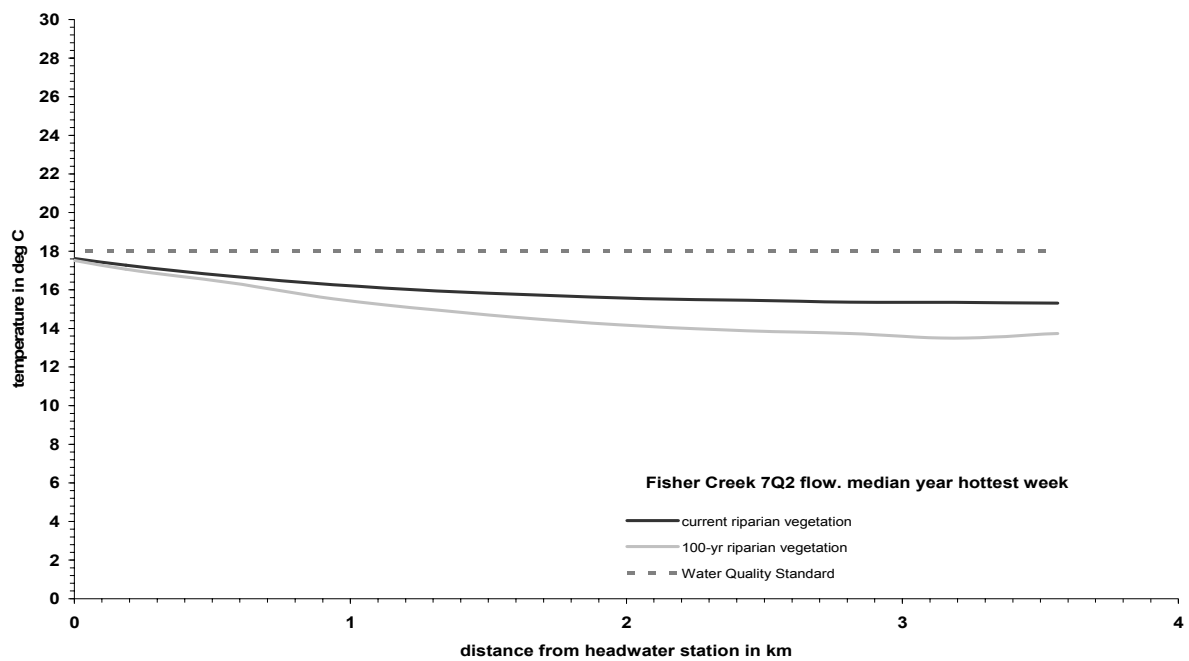


Figure 32. Predicted daily maximum temperature in Fisher Creek under critical conditions for the TMDL.

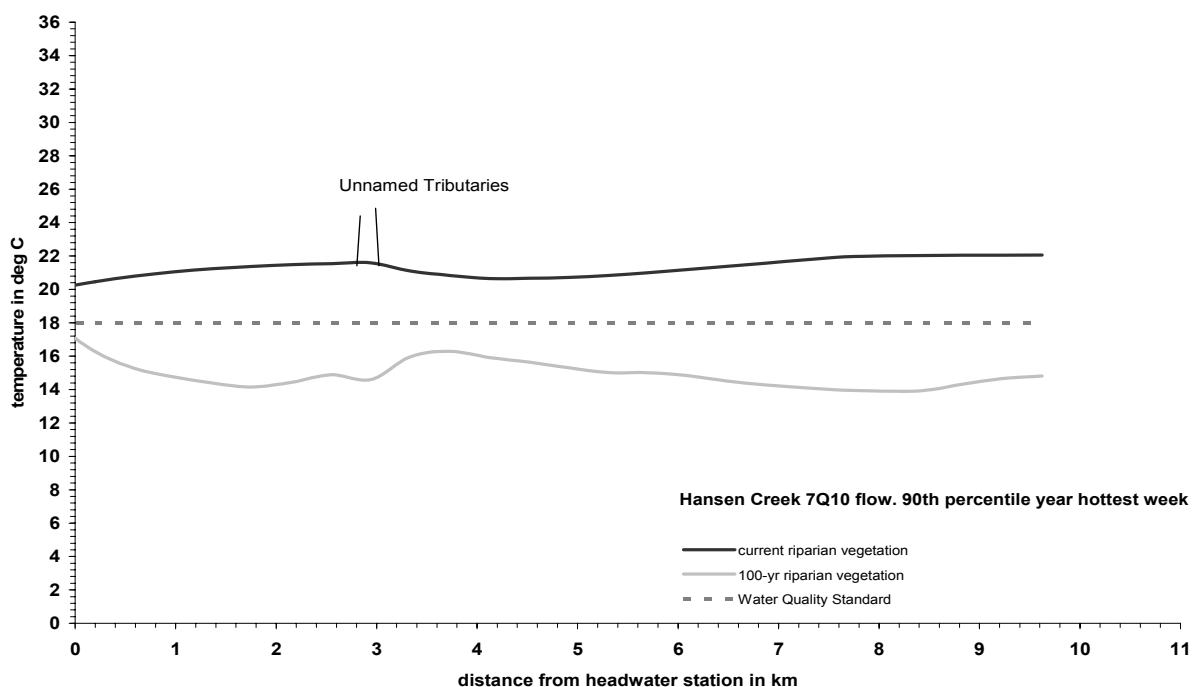
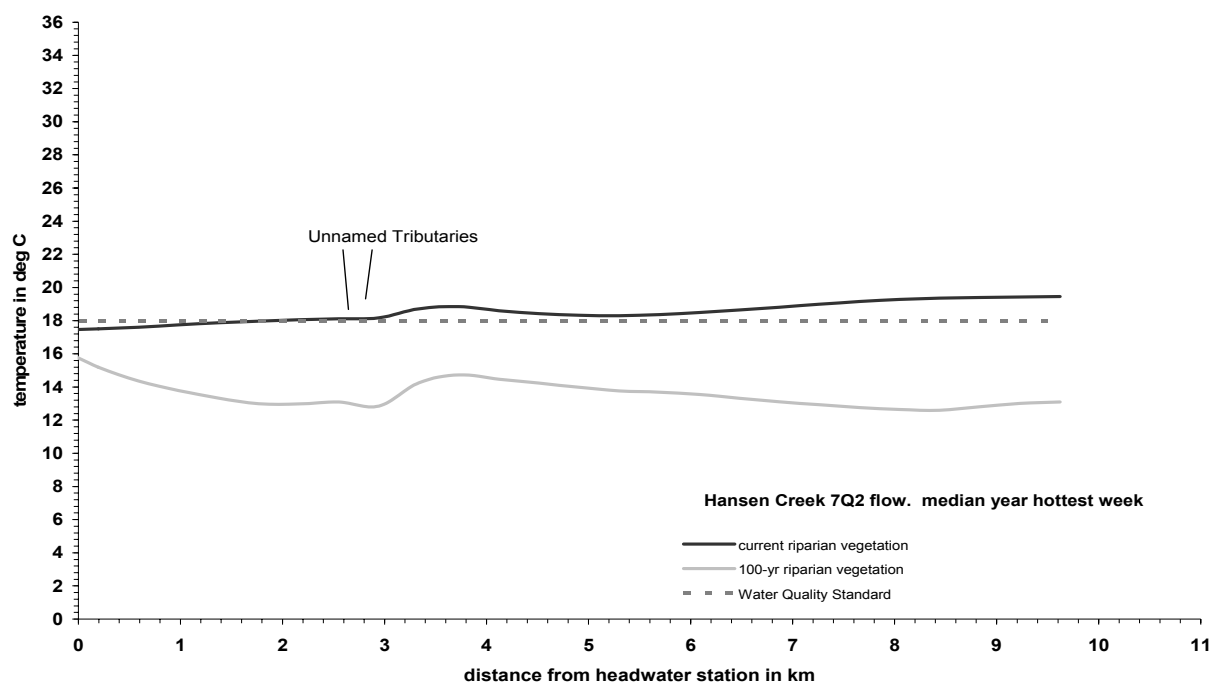


Figure 33. Predicted daily maximum temperature in Hansen Creek under critical conditions for the TMDL.

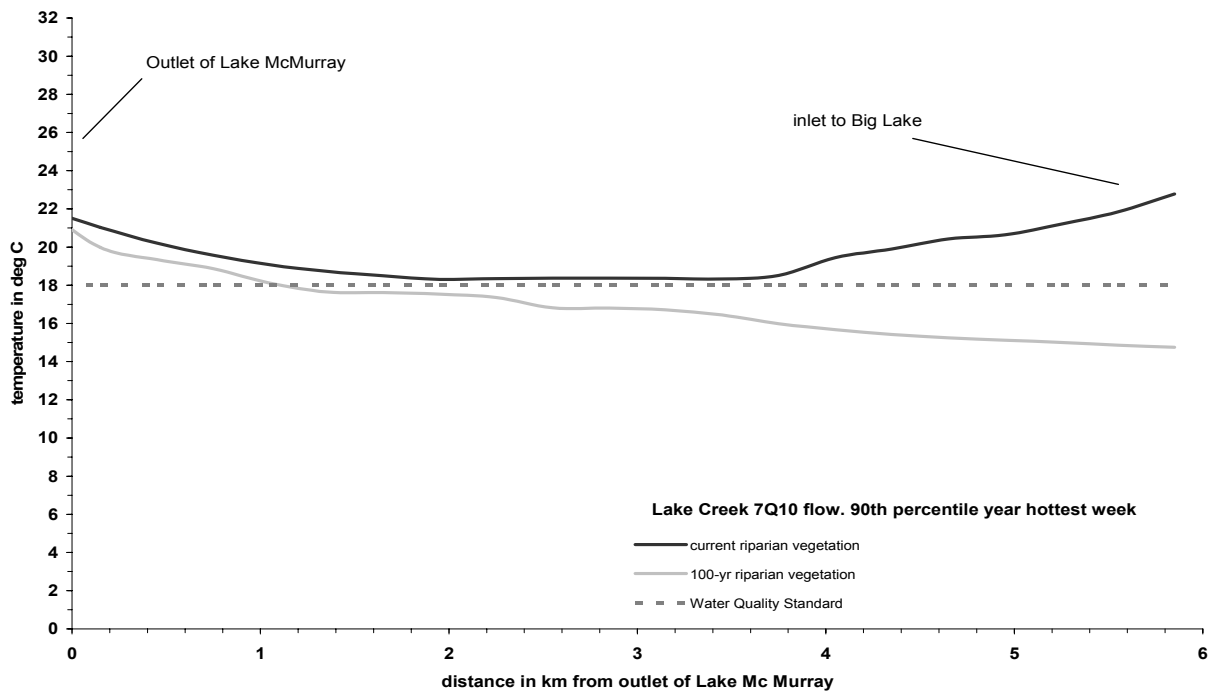
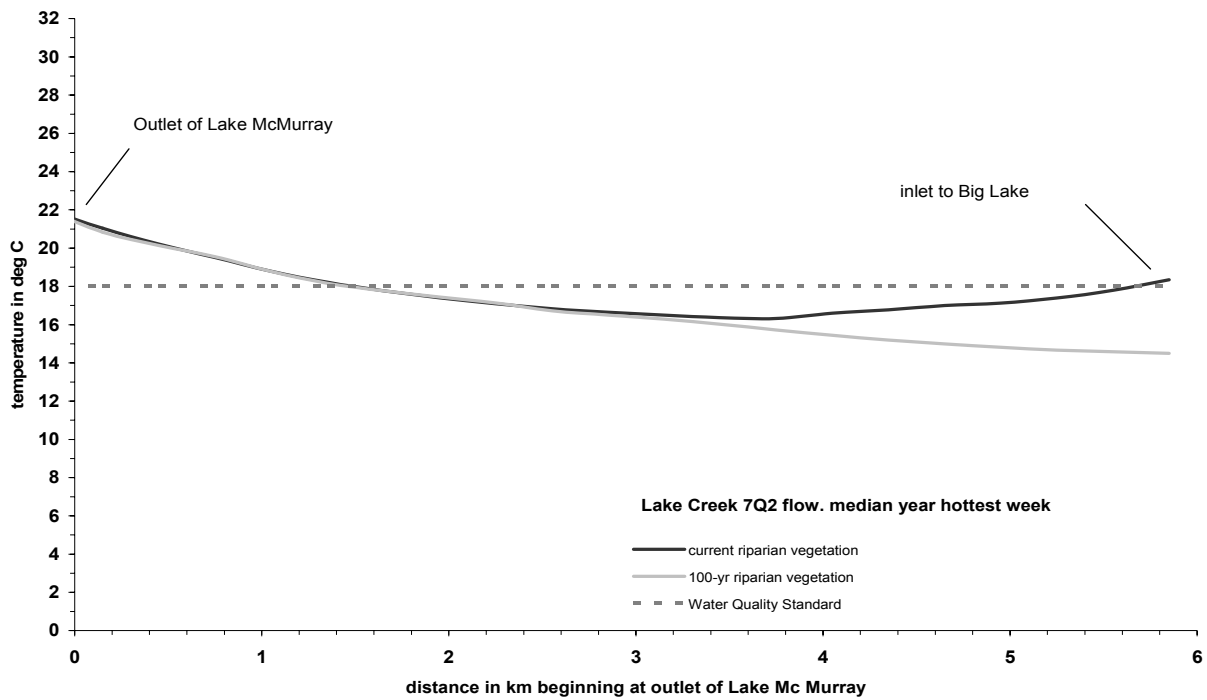


Figure 34. Predicted daily maximum temperature in Lake Creek under critical conditions for the TMDL.

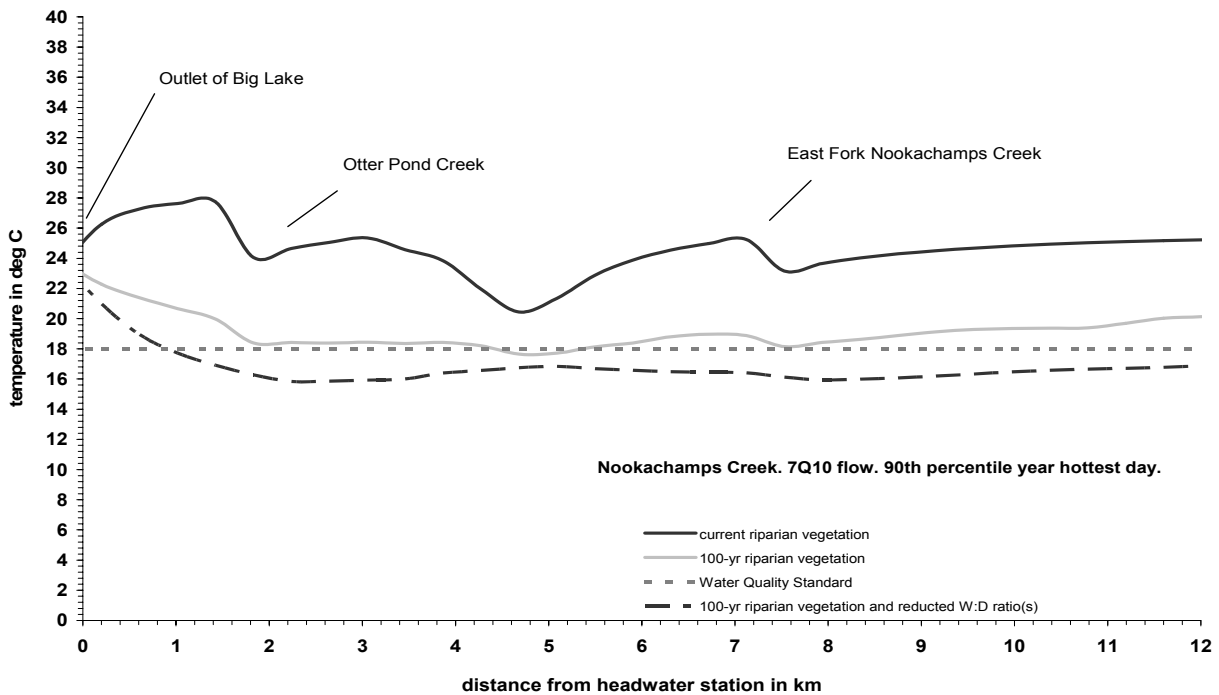
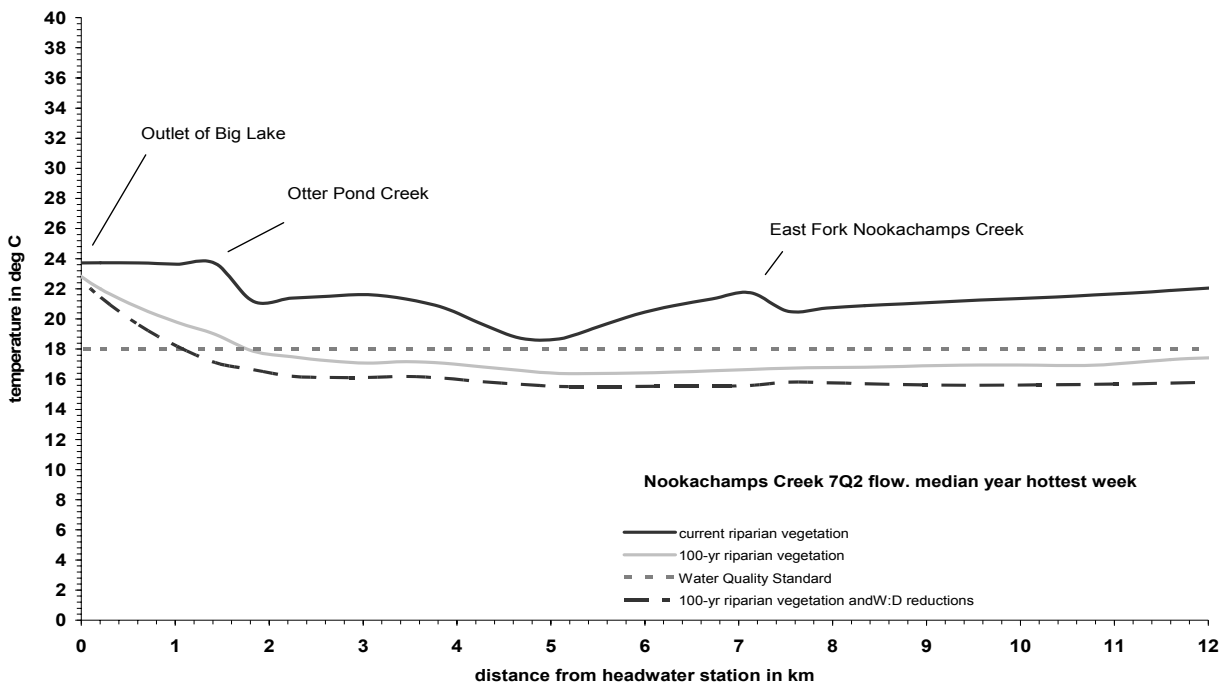


Figure 35. Predicted daily maximum temperature in Nookachamps Creek under critical conditions for the TMDL.

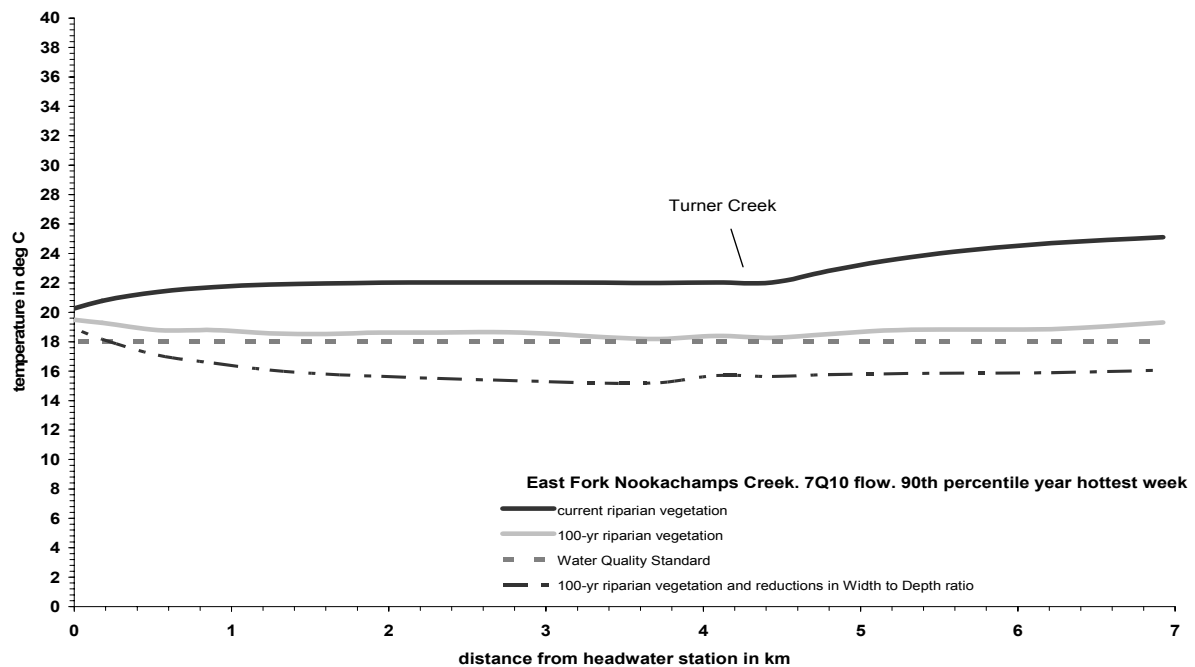
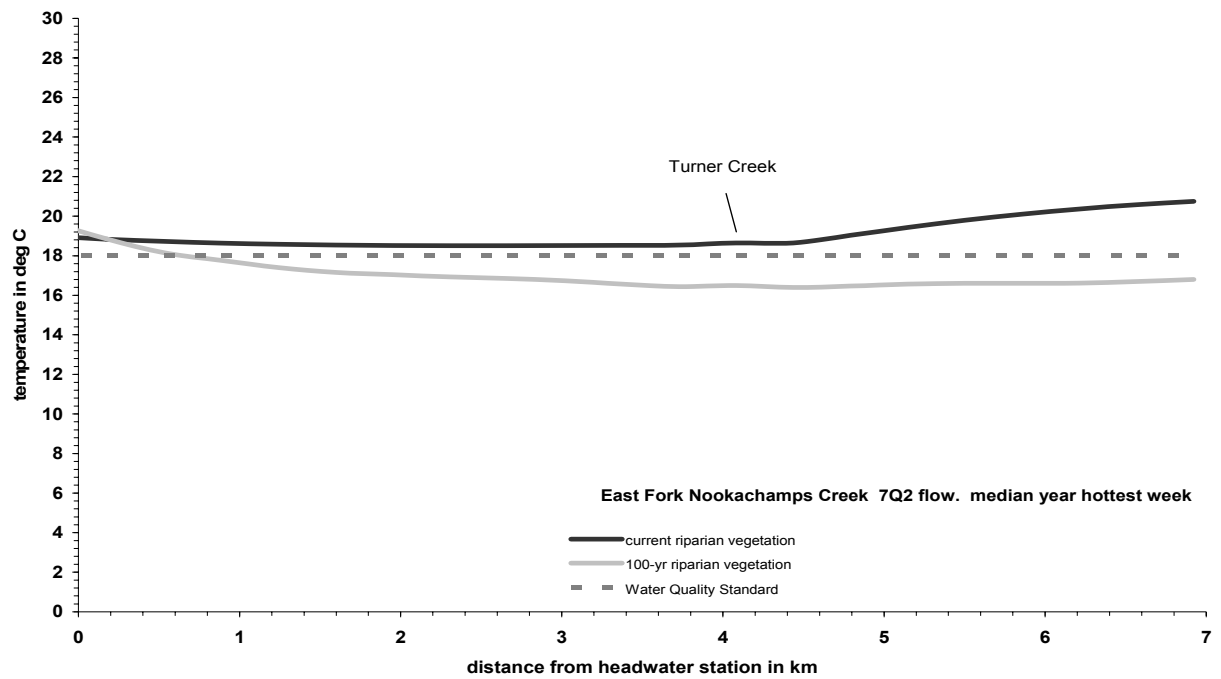


Figure 36. Predicted daily maximum temperature in East Fork Nookachamps Creek under critical conditions for the TMDL.

Load Allocations

The Load Allocations for effective shade in the lower Skagit River study area are as follows:

- For Carpenter Creek, Fisher Creek, Hansen Creek, Lake Creek, Turner Creek, Red Creek, and Otter Pond Creek, the load allocation for effective shade is the effective shade that would result from 100-yr old riparian vegetation. For Nookachamps Creek and East Fork Nookachamps Creek, the load allocation for effective shade is the effective shade that would result from a combination of 100 year old riparian vegetation and reductions in channel width to depth ratios.

Load Allocations for effective shade are quantified in Tables 16-21 for the following modeled reaches of the lower Skagit River study area: Carpenter Creek, Fisher Creek, Hansen Creek, Lake Creek, Nookachamps Creek, and East Fork Nookachamps Creek. The recommended load allocations for effective shade are predicted to result in significant reductions of the flux of solar radiation to streams within the lower Skagit River basin

The potential future vegetation at 100-yrs was assumed to be represented by average tree heights ranging from 28 to 37 meters. Riparian zone widths were based on average tree heights and ranged from 23-28 meters. Canopy densities at these widths were estimated as 75%.

In addition to the load allocations for effective shade, other management activities are recommended for compliance with water quality standards for water temperature, including measures to reduce channel width to depth ratios, restore channel-floodplain connectivity, and promote water use efficiency by encouraging conversion to more efficient irrigation systems, such as drip systems, wherever practical. More information on specific management activities is given in the “Management Recommendation” section of this report.

Table 16. Load allocations for effective shade in Carpenter Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0 (headwater)		
0.45	80.0	85.0
0.90	60.0	85.0
1.35	60.0	85.4
1.80	40.0	83.3
2.26	30.0	88.9
2.71	30.0	92.8
3.16	30.0	92.6
3.61	15.0	93.3
4.06	15.0	93.8
4.51	15.0	92.5
4.96	15.0	92.6
5.41	15.0	93.0
5.86	15.0	93.8
6.31	15.0	92.7
6.77	15.0	92.7
7.22	15.0	93.9
7.67	15.0	93.3
8.12	15.0	92.1
8.57	25.0	91.8
9.02	25.0	91.8
9.47	25.0	91.7
9.92	25.0	91.4
10.37	25.0	91.9
10.82	25.0	92.6
11.28	25.0	90.7

Table 17. Load allocations for effective shade in Fisher Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0 (headwater)		
0.38	80.0	85.0
0.75	80.0	85.2
1.13	80.0	91.8
1.50	80.0	91.1
1.88	80.0	91.9
2.25	80.0	91.6
2.63	80.0	91.6
3.00	80.0	90.6
3.38	80.0	93.2
3.75	80.0	87.4

Table 18. Load allocations for effective shade in Hansen Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0(headwater)		
0.39	60.0	95.3
0.79	60.0	95.2
1.18	60.0	93.4
1.57	60.0	94.0
1.96	60.0	93.7
2.36	60.0	87.6
2.75	60.0	84.0
3.14	60.0	92.1
3.53	60.0	95.6
3.93	60.0	93.8
4.32	60.0	89.8
4.71	50.0	85.8
5.10	50.0	89.2
5.50	50.0	90.6
5.89	50.0	84.9
6.28	50.0	89.0
6.67	50.0	93.5
7.07	50.0	93.4
7.46	50.0	93.3
7.85	50.0	93.4
8.24	50.0	92.1
8.64	50.0	90.4
9.03	50.0	83.6
9.42	50.0	82.3
9.82	50.0	84.1

Table 19. Load allocations for effective shade in Lake Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0 (headwater)		
0.30	75.0	90.6
0.60	75.0	84.0
0.90	75.0	84.0
1.20	75.0	84.0
1.50	75.0	83.8
1.80	75.0	78.6
2.10	75.0	79.0
2.40	75.0	81.0
2.70	75.0	89.6
3.00	75.0	82.1
3.30	75.0	83.5
3.60	75.0	88.1
3.90	70.0	94.4
4.20	50.0	94.4
4.50	53.2	95.2
4.80	47.0	94.8
5.10	50.6	94.7
5.40	38.7	94.9
5.70	35.6	95.9
6.00	19.3	94.8

Table 20. Load allocations for effective shade in Nookachamps Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0 (headwater)		
0.41	30.0	90.0
0.81	30.0	92.3
1.22	30.0	91.2
1.63	30.0	91.7
2.04	30.0	92.8
2.44	30.0	91.5
2.85	30.0	91.5
3.26	30.0	92.0
3.66	50.0	91.7
4.07	50.0	92.9
4.48	75.0	93.0
4.88	82.0	93.0
5.29	40.0	93.0
5.70	35.0	93.0
6.11	35.0	92.2
6.51	35.0	92.2
6.92	35.0	89.8
7.33	35.0	90.9
7.73	35.0	92.5
8.14	35.0	91.0
8.55	35.0	85.9
8.95	35.0	85.9
9.36	35.0	84.0
9.77	35.0	83.5
10.18	35.0	84.3
10.58	35.0	85.5
10.99	35.0	87.2
11.40	35.0	87.7
11.80	35.0	81.5
12.21	35.0	79.1

Table 21. Load allocations for effective shade in East Fork Nookachamps Creek.

Distance in km from headwater station	Current condition average effective shade (percent)	Load Allocation for effective shade on August 12 (percent)
0 (headwater)		
0.36	42.00	88.40
0.71	42.00	91.20
1.07	42.00	86.00
1.42	42.00	87.80
1.78	42.00	86.30
2.13	42.00	84.90
2.49	42.00	85.20
2.84	42.00	85.30
3.20	42.00	85.80
3.55	42.00	86.20
3.91	42.00	83.20
4.26	42.00	80.70
4.62	42.00	82.70
4.97	30.00	80.90
5.33	30.00	82.00
5.68	30.00	81.70
6.04	30.00	81.70
6.39	30.00	81.00
6.75	30.00	79.20
7.10	30.00	78.60

Margin of Safety

The margin of safety accounts for uncertainties regarding pollutant loading and water-body response. In this TMDL, the margin of safety is addressed by using critical climatic conditions in the modeling analysis. The margin of safety in this TMDL is implicit because of the following:

- The 90th percentile of the highest 7-day-averages of daily maximum air temperatures for each year of record at Mount Vernon 3NW was used to develop a reasonable worst case condition for prediction of water temperatures in the lower Skagit River study area. Typical conditions were represented by the median of the highest 7-day-averages of daily maximum air temperatures for each year of record.
- The lowest 7-day average flows during July-August with recurrence intervals of 10 years (7Q10) were used to evaluate reasonable worst-case conditions. Typical conditions were evaluated using the lowest 7-day average flows during July-August with recurrence intervals of 2 years (7Q2).
- Model uncertainty for prediction of water temperature was assessed by estimating the root-mean-square error (RMSE) of model predictions compared with observed temperatures during model validation. The average RMSE for model calibration and verification was 0.44 °C.
- 7Q10 low flow conditions were used when calculating the effective shade and solar fluxes from site potential vegetation at a 100-yr site index.

Management Recommendations

Three specific management recommendations are described below that would result in long-term temperature reductions in streams located within the lower Skagit River basin.

- Riparian zones next to streams should be managed to allow full maturation of vegetation, preferably including native woody species that offer shade protection. Such managed zones would not only provide the temperature benefits associated with direct shading of streams, but also would provide indirect benefits related to microclimate development, source of woody debris, and eventual narrowing and deepening of the stream.

Streams that have large width to depth ratios as a result of erosion and sedimentation should be investigated to determine the causes of erosion and sources of sediment. Sources such as eroding streambanks and poorly managed upland areas should be addressed through appropriate riparian restoration projects and/or improved land management practices.

- Property owners next to streams should be encouraged to reduce water consumption during late-summer low flow conditions, to protect the remaining instream flow.

Instream flows and water withdrawals are managed through regulatory avenues separate from TMDLs. However, stream temperature is related to the amount of instream flow, and increases in flow generally result in decreases in maximum temperatures. Future projects that have the potential to increase groundwater inflows to streams in the watershed should be encouraged and have the potential to decrease stream temperatures. Voluntary retirement or purchase of existing water rights for conversion to instream flow should also be encouraged.

- Stream restoration projects should be undertaken that are likely to result in improved stream connectivity to groundwater, with its moderating influence, and with adjacent floodplain.

Groundwater inflows into the streams could increase if recharge is increased as a result of renewed channel-floodplain connectivity. Since engineered channels reduce the likelihood of flooding, both the amount of time floodwaters spend on the floodplain and the surface area inundated is reduced during average annual high-flow events. This action reduces the opportunity for floodwaters to penetrate the alluvial aquifer and, in turn, decreases baseflow by reducing groundwater discharge during the low flow season (Seiger et al 1998).

Recommendations for Monitoring

To determine the effects of management strategies within the lower Skagit River watershed, regular monitoring is recommended. Continuously recording water temperature monitors should be deployed from July through August to capture the critical conditions. The following streams are suggested for inclusion in a sampling program, or as part of the Skagit County Surface Water Management sampling program:

- Carpenter Creek
- Hansen Creek
- Nookachamps Creek
- Lake Creek
- East Fork Nookachamps Creek
- Red Creek
- Turner Creek
- Otter Pond Creek
- Coal Creek
- Wiseman Creek
- Mannser Creek
- Cumberland Creek
- Day Creek

Shade management practices involve the development of mature riparian vegetation, which requires many years to become established. Interim monitoring of water temperatures during summer is recommended, perhaps at five-year intervals. Interim monitoring of the composition and extent of riparian vegetation is also recommended, for example by using photogrammetry or remote sensing methods.

Methods to measure effective shade at the stream center in various segments for comparison with the load allocations could employ hemispherical photography, angular canopy densiometers, or solar pathfinder instruments.

References Cited

- Bell, M. C. 1986. Fisheries handbook of engineering requirements and biological criteria. U.S. Army, Corps of Engineers, Office of the Chief of Engineers, Fish Passage Development and Evaluation Program, Portland, OR.
- Belt, G.H., J. O'Laughlin, and W.T. Merrill. 1992. Design of Forest Riparian Buffer Strips for the Protection of Water Quality: Analysis of Scientific Literature. Report No. 8. Idaho Forest, Wildlife, and Range Policy Analysis Group, University of Idaho, Moscow, ID.
- Beschta, R.L. and J. Weathered, 1984. A computer model for predicting stream temperatures resulting from the management of streamside vegetation. USDA Forest Service. WSDGAD-00009.
- Beschta, R.L., Bilby, R.E., Brown, G.W., Holtby, L.B., and Hofstra, T.D., 1987. Stream temperature and aquatic habitat: fisheries and forestry interactions. In: Streamside management: forestry and fisher interactions, E.O. Salo and T.W. Cundy, editors, pp 192-232. Proceedings of a conference sponsored by the College of Forest Resources, University of Washington, Seattle WA, Contribution No. 57 – 1987.
- Bjornn, T. C., and D. W. Reiser. 1991. Habitat requirements of salmonids in streams. Pages 83-138 in W. R. Meehan, editor. Influences of forest and rangeland management on salmonid fishes and their habitats. Special Publication 19. American Fisheries Society, Bethesda, MD.
- Bolton, S. and C. Monohan. 2001. A review of the literature and assessment of research needs in agricultural streams in the Pacific Northwest as it pertains to freshwater habitat for salmonids. Prepared for: Snohomish County, King County, Skagit County, and Whatcom County. Prepared by: Center for Streamside Studies, University of Washington. Seattle, WA.
- Boyd, M.S. 1996. Heat source: stream, river, and open channel temperature prediction. Oregon State University. M.S. Thesis. October, 1996.
- Boyd, M. and Park, C., 1998. Sucker-Grayback Total Daily Maximum Load. Oregon Department of Environmental Quality and U.S. Forest Service.
- Brazier, J.R., and Brown, G.W., 1973. Buffer strips for stream temperature control. Res. Pap. 15. Forest Research Laboratory, Oregon State University. 9 p.
- Brett, J. R. 1952. Temperature tolerance in young Pacific salmon, genus *Oncorhynchus*. Journal of the Fisheries Research Board of Canada 9:265-323.
- Broderson, J.M. 1973. Sizing buffer strips to maintain water quality. M.S. Thesis, University of Washington, Seattle, WA.

- Brosofske, K.D., J. Chen, R.J. Naiman, and J.F. Franklin. 1997. Harvesting effects on microclimate gradients from small streams to uplands in western Washington. *Ecol. Appl.* 7(4):1188-1200.
- Brown, G.W. 1972. An improved temperature prediction model for small streams. *Water Resources Research.* 6(4):1133-1139.
- Brown, G.W., G.W. Swank, and J. Rothacher. 1971. Water temperature in the Steamboat drainage. USDA Forest Service Research Paper PNW-119, Portland, OR. 17 p.
- Castelle, A.J. and A.W. Johnson. 2000. Riparian vegetation effectiveness. Technical Bulletin No. 799. National Council for Air and Stream Improvement, Research Triangle Park, NC. [February 2000.
- Brown, G.W. and J.T. Krygier. 1970. Effects of clear-cutting on stream temperature. *Water Resources Research* 6(4):1133-1139.
- Chen, Y.D., 1996. Hydrologic and water quality modeling for aquatic ecosystem protection and restoration in forest watersheds: a case study of stream temperature in the Upper Grande Ronde River, Oregon. PhD dissertation. University of Georgia. Athens, GA.
- Chen, Y.D., Carsel, R.F., McCutcheon, S.C., and Nutter, W.L., 1998. Stream temperature simulation of forested riparian areas: I. watershed-scale model development. *Journal of Environmental Engineering.* April 1998. pp 304-315.
- CH2MHill, 2000. Review of the scientific foundations of the forests and fish plan. Prepared for the Washington Forest Protection Association. <http://www.wfpa.org/>
- Chen, Y.D., Carsel, R.F., McCutcheon, S.C., and Nutter, W.L., 1998. Stream temperature simulation of forested riparian areas: II. model application. *Journal of Environmental Engineering.* April 1998. pp 316-328.
- Chapra, S.C. 2001. Water-Quality Modeling Workshop for TMDLs, Washington State Department of Ecology, Olympia, WA, June 25-28, 2001.
- Chapra, S.C. 1997. Surface water quality modeling. McGraw-Hill Companies, Inc.
- Corbett, E.S. and J.A. Lynch. 1985. Management of streamside zones on municipal watersheds. P. 187-190 In: R.R. Johnson, C.D. Ziebell, D.R. Patton, P.F. Folliott, and R.H. Hamre (eds.). *Riparian ecosystems and their management: reconciling conflicting uses.* First North American Riparian Conference, April 16-18, 1985. Tucson, AZ.
- Connolly, P.J. 2001. Stillaguamish River Watershed Restoration. 1999 Annual Report. Edited by P.J. Connolly, US Geological Survey, Columbia River Research Laboratory, Cook, WA. Prepared for Bonneville Power Administration, Environment, Fish and Wildlife, Portland, OR, Project Number: 1998-019-01.

Dauble, D. 1994. Influence of water use practices on fisheries resources in the Yakima River basin. Northwest Science 68.

Dong, J., J. Chen, K.D. Brosfokske, and R.J. Naiman. 1998. Modelling air temperature gradients across managed small streams in western Washington. Journal of Environmental Management. 53, 309-321.

Ecology. 2001. Upper Humptulips River Temperature Total Maximum Daily Load -- Technical Report. Washington State Department of Ecology. Water Quality Program. Publication number 01-10-056.

Ecology. 2003b. Shade.xls - a tool for estimating shade from riparian vegetation. Washington State Department of Ecology. <http://www.ecy.wa.gov/programs/eap/models/>

Ecology. 2003b. QUAL2Kw.xls - a diurnal model of water quality for steady flow conditions. Washington State Department of Ecology. <http://www.ecy.wa.gov/programs/eap/models/>.

Edinger, J.E., D.K. Brady, and J.C. Geyer. 1974. Heat Exchange and Transport in the Environment, Report No. 14, Electric Power Res. Inst. Pub. No. EA-74-049-00-3, Palo Alto, CA, Nov. 125 pp.

Entranco. 1993. Lower Skagit River Basin Water Quality Study- Final Report. Bellevue, WA.

EPA. 1991. Guidance for Water Quality-based Decisions: The TMDL Process. U.S. Environmental Protection Agency. EPA 440/4-91-001.

EPA. 1998. Report of the Federal Advisory Committee on the Total Maximum Daily Load (TMDL) Program. The National Advisory Council For Environmental Policy and Technology (NACEPT). US Environmental Protection Agency, Office of The Administrator. EPA 100-R-98-006.

Everest, F. H., N. B. Armantrout, S. M. Keller, W. D. Parante, J. R. Sedell, T. E. Nickelson, J. M. Johnston, and G. N. Haugen. 1985. Salmonids. Pages 199-230 in E. R. Brown, editor. Management of wildlife and fish habitats in forests of western Oregon and Washington. Publication R6-F&WL-192-1985. U.S. Department of Agriculture, Forest Service, Pacific Northwest Region, Portland, OR.

Faux, R. 2002. Aerial surveys in the Stillaguamish and Skagit River basins, thermal infrared and color videography. March 16, 2002. Report to: Washington Department of Ecology. Watershed Sciences LLC. Corvallis, OR.

FEMAT (Forest Ecosystem Management Assessment Team). 1993. Forest ecosystem management: an ecological, economic, and social assessment. Report of the Forest Ecosystem Management Assessment Team. U.S. Government Printing Office 1993-793-071. U.S. Government Printing Office for the U.S. Department of Agriculture, Forest Service; U.S. Department of the Interior, Fish and Wildlife Service, Bureau of Land Management, and National Park Service; U.S. Department of Commerce, National Oceanic and Atmospheric

Administration and National Marine Fisheries Service; and the U.S. Environmental Protection Agency.

Franklin, J.F. and C.T. Dyrness. 1973. Natural vegetation of Oregon and Washington. U.S. Forest Service. General technical report PNW-8.

GEI, 2002. Efficacy and economics of riparian buffers on agricultural lands, State of Washington. Prepared for the Washington Hop Growers Association. Prepared by GEI Consultants, Englewood, CO.

Gordon, N.D, T.A. McMahon, and B.L. Finlayson. 1992. Stream Hydrology, An Introduction for Ecologists. Published by John Wiley and Sons.

Gregory, S.V., F.J. Swanson, W.A. McKee and K.W. Cummins. 1991. An ecosystem perspective of riparian zones. *BioScience* 41: 540-551.

Halliday D. and R. Resnick. 1988. Fundamentals of Physics. 3rd edition. John Wiley and Sons, New York. Pp. 472-473.

Hallock, R. J., R. J. Elwell, and D. H. Fry Jr. 1970. Migrations of adult king salmon *Oncorhynchus tshawytscha* in the San Joaquin Delta as demonstrated by the use of sonic tags. Fish Bulletin 151. California Department of Fish and Game, Sacramento, CA.

Hewlett, J.D. and J.C. Fortson. 1983. Stream temperature under an inadequate buffer strip in the southern piedmont. *Water Resources Bulletin* 18(6):983.

Holtby, L.B. 1988. Effects of logging on stream temperatures in Carnation Creek, B.C., and associated impacts on the coho salmon. *Canadian Journal of Fisheries and Aquatic Sciences* 45:502-515.

Hicks, M. 2001. Evaluating standards for protecting aquatic life in Washington's surface water quality standards. Temperature Criteria. Washington State Department of Ecology, Olympia, WA.

Hokanson, K.E.F., C.F. Kleiner and T.W. Thorslund. 1977. Effects of constant temperatures and diel temperature fluctuations on specific growth and mortality rates and yield of juvenile rainbow trout, *Salmo gairdneri*. *J. Fish Res. Bd. Can.*, 34:639-648.

Ice, G., 2001. How direct solar radiation and shade influences temperatures in forest streams and relaxation of changes in stream temperature. In: Cooperative Monitoring, Evaluation, and Research (CMER) workshop: heat transfer processes in forested watershed and their effects on surface water temperature, Lacey, WA, February 2001.

Jezorek, I. and P.J. Connolly. 2001. Stillaguamish River Watershed Project 1999 Annual Report, Report H: Flow, Temperature, and Habitat Conditions in the Stillaguamish River Watershed. USGS Columbia River Research Laboratory. Cook, WA.

- Johnson, A.W. and D. Ryba. 1992. A literature review of recommended buffer widths to maintain various functions of stream riparian areas. King County Surface Water Management Division, Seattle, Washington.
- Jones, J.J., J.P. Lortie and U.D. Pierce, Jr. 1988. The identification and management of significant fish and and wildlife resources in southern coastal Maine. Maine Department of Inland Fisheries and Wildlife, Augusta, Maine.
- Jurajda, P. 1995. Effect of channelization and regulation on fish recruitment in a floodplain river. *Regulated Rivers: Research & Management* 10: 207-215.
- Knutson, K.L. and V.L. Naef. 1997. Management recommendations for Washington's priority riparian habitats. Washington Department of Fish and Wildlife, Olympia, Washington.
- Ledwith, T. 1996. The effects of buffer strip width on air temperature and relative humidity in a stream riparian zone. http://watershed.org/news/sum_96/buffer.html. Watershed Management Council, P.O. Box 1090, Mammoth Lakes, CA 93546
- Leopold, L. 1994. A view of the river. Harvard University Press.
- Levno, A. and J. Rothacher. 1967. Increases in maximum stream temperatures after logging in old growth Douglas-fir watersheds. USDA Forest Service PNW-65, Portland, OR. 12 p.
- Lindeburg, M.R. Civil engineering reference manual. Fifth edition. Professional Publications Inc. Belmont, CA.
- Lynch, J.A., E.S. Corbett, and K. Mussallem. 1985. Best management practices for controlling nonpoint-source pollution on forested watersheds. *Journal of Soil and Water Conservation* 40:164-167.
- Lynch, J.A., G.B. Rishel, and E.S. Corbett. 1984. Thermal alterations of streams draining clearcut watersheds: quantification and biological implications. *Hydrobiologia* 111:161-169.
- Mankowski, J. and S. Landino (2001). *Riparian Ecosystem Literature Citations*.
- Major, R. J., and J. L. Mighell. 1966. Influence of Rocky Reach dam and the temperature of the Okanogan River on the upstream migration of sockeye salmon. U.S. Fish and Wildlife Service Fishery Bulletin 66:131-147.
- Meisner, J. D. 1990. Effect of climatic warming on the southern margins of the native range of brook trout (*Salvelinus fontinalis*). *Canadian Journal of Fisheries and Aquatic Sciences* 47:1065-1070.
- Monan, G. E., J. H. Johnson, and G. F. Esterberg. 1975. Electronic tags and related tracking techniques aid in study of migrating salmon and steelhead trout in the Columbia River basin. *Marine Fisheries Review* 37:9-15.

Murphy, M.L. 1995. Forestry impacts on freshwater habitat of anadromous salmonids in the Pacific Northwest and Alaska—Requirements for protection and restoration. Decision Analysis Series Number 1. USDC, NOAA, National Marine Fisheries Service, Coastal Ocean Program, Juneau, Alaska.

Naiman, R.J., T.J. Beechie, L.E. Benda, D.R. Berg, P.A. Bisson, L.H. MacDonald, M.D. O'Connor, P.L. Olson and E.A. Steel. 1992. Fundamental elements of ecologically healthy watersheds in the Pacific Northwest Coastal Ecoregion. Pp. 127-188 *In* Watershed Management. R.J. Naiman (ed.). Springer-Verlag, NY.

National Research Council. 1996 Upstream: salmon and society in the Pacific Northwest. National Academy Press, Washington, D.C. 452 pp.

Nookachamps Watershed Nonpoint Action Plan. 1995. Skagit County Dept. of Planning and Community Development. Mt. Vernon, WA.

ODEQ (Oregon Department of Environmental Quality). 2000. Umatilla River Basin Total Maximum Daily Load (TMDL) and Water Quality Management Plan (WQMP). Portland, OR. October 2000. <http://www.deq.state.or.us/wq/TMDLs/Umatilla/UmatillaTMDLAppxA-4.pdf>

ODEQ. 2001. Ttools 3.0 User Manual. Oregon Department of Environmental Quality. Portland OR. <http://www.deq.state.or.us/wq/TMDLs/WQAnalTools.htm>

OWEB. 1999. Water quality monitoring technical guidebook: chapter 14, stream shade and canopy cover monitoring methods. Oregon Watershed Enhancement Board. http://www.oweb.state.or.us/pdfs/monitoring_guide/monguide2001_ch14.pdf

Patric, J.H. 1980. Effects of wood products harvest on forest soil and water relations. *Journal of Environmental Quality* 9(1):73-79.

Pelletier, G. and D. Bilhimer. 2001. Stillaguamish River temperature total maximum daily load: quality assurance project plan. Washington State Department of Ecology, Olympia WA.

Pess, G.R., B. Collins, M. Pollock, T. J. Beechie, A. Haas, and S. Grigsby. Historic and current factors that limit coho salmon production in the Stillaguamish River basin, Washington State: Implications for salmonid habitat protection and restoration. Prepared for Snohomish County Department of Public Works and The Stillaguamish Tribe of Indians.

Pitz, C.F. and R.S. Garrigues. Summary of streamflow conditions, September 2000: Fisher Creek and Carpenter Creek basin. Washington State Department of Ecology, Olympia, WA.

Poole, G.C., C.H. Berman. 2000. Pathways of human influence on water temperature dynamics in stream channels. *Environmental Management*.

Quiqley, T.M, R.A. Gravenmier, and R.T. Graham. 2001. The Interior Columbia Basin Ecosystem Management Project (ICBEMP): project data. Station Misc. Portland OR: US Department of Agriculture, Forest Service, Pacific Northwest Research Station.

- Rishel, G.B., J.A. Lynch, and E.S. Corbett. 1982. Seasonal stream temperature changes following forest harvesting. *Journal of Environmental Quality* 11(1):112-116.
- Rosgen, D. 1996. *Applied river morphology*. Wildland Hydrology publishers. Pagosa Springs, CO.
- Steiger, J.M., James and F. Gazelle. 1998. Channelization and consequences on floodplain system functioning on the Garonne River, SW France. *Regulated Rivers: Research and Management* 12: 391-413.
- Skagit County Dept. of Planning and Community Development. 1995. *Nookachamps Watershed Nonpoint Action Plan*.
- Solley, W. B., R.R. Pierce and H.A. Perlman. 1993. Estimated use of water in the United States in 1990. *Geological Survey Circular 1081*, U.S. Department of Interior, 76 pp.
- Spence, B. C., G. A. Lomnický, R. M. Hughes, and R. P. Novitzki. 1996. An ecosystem approach to salmonid conservation. TR-4501-96-6057. ManTech Environmental Research Services Corp., Corvallis, OR.
- Steinblums, I., H. Froehlich and J. Lyons. 1984. Designing stable buffer strips for stream protection. *Journal of Forestry* 821(1): 49-52.
- Swanson, F. J. and G.W. Lienkaemper. 1978. Physical consequences of large organic debris in Pacific Northwest streams. *USDA Forest Service, PNW GTR-69*.
- Swift, L.W. and J.B. Messer. 1971. Forest cuttings raise water temperatures of a small stream in the southern Appalachians. *Journal of Soil and Water Conservation* 26:11-15.
- Theurer, F.D. K.A. Voos, and W.J. Miller. Instream water temperature model, instream flow information paper 16. Western Energy and Land Use Team, Division of Biological Services, Research and Development, US Fish and Wildlife Services. FWS/OBS-84/15.
- Thomann, R.V. and J.A. Mueller. 1987. *Principals of surface water quality modeling and control*. Harper and Row Publishers, New York, NY. 644pp.
- Teti, P., 2001. A new instrument for measuring shade provided by overhead vegetation. Cariboo Forest Region Research Section, British Columbia Ministry of Forests, Extension note No. 34, <http://www.for.gov.bc.ca/cariboo/research/extnotes/extnot34.htm>
- USDA. 1981. *Soil Survey of Skagit County Area, Washington*. 372 pp.
- USFS. 1994. Standards and guidelines for management of habitat for late-successional and old-growth forest related species with the range of the Northern Spotted Owl. *USDA Forest Service, Pacific Northwest Region, Portland, OR*.

USGS. 1997. The ground-water system and ground water quality in western Snohomish County, Washington. US Geological Survey, Water Resources Investigations Report 96-4312, Tacoma, WA.

Ward, J.V. 1998. Riverine landscapes: Biodiversity patterns, disturbance regimes, and aquatic conservation. *Biological Conservation* 83: 269:278.

Wetzel, R. G. 1983. *Limnology*, 2nd edition. Saunders College Publishing, Philadelphia, PA.

Appendices

Appendix A. Instream water temperature standard exceedences and station disposition report for the 2001 lower Skagit River tributaries temperature TMDL

This appendix totals the daily temperature standard exceedences of the maximum daily temperature for each instream tidbit station in this study and includes data from the continuous flow gages (continuous temperatures were reported by the stream hydrology unit) and data from the ambient monitoring stations (continuous instream temperatures using same protocols and type of equipment used in the TMDL study). Station descriptors and any data qualifiers are included in the paragraphs following the total exceedences for each station.

Station 03B01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	9
Max Daily Temperature Threshold of 18 °C	0

The tidbit station on Bulson Creek was located on the east side of Bulson Creek Road. The June storm event washed out the instream tidbit and the data was lost from May 25th through June 21 until I installed the new tidbit. No other problems with this station were encountered for the remainder of the study period.

Station 03C01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	102(104 not tidally corrected)
Max Daily Temperature Threshold of 18 °C	50 (67 not tidally corrected)

This station was located beneath the Pioneer Highway bridge on Fisher Slough. The instream tidbit was definitely affected by tidal exchanges that were regulated by a tide gate about 20 feet directly downstream of the tidbit. There were several times the tidbit was checked and found dry because of a low tide (at which point it was repositioned closer to the bottom of the stream), however it is highly likely that air temperature could have affected the instream during the periods of low tides. Unfortunately, the daytime low tides occurred during the hottest parts of the day (between 11am and 5pm) during the majority of the study period, and this data should be qualified. It is not clear the total exceedences above were all instream temperatures. However, extrapolating the exceedences from the upstream station 03C02 shows that most of the exceedences at this station (03C01) were real, although the temperatures may be higher than actual.

The relative humidity sensor was found vandalized on August 6th and no data was recovered for the period from 6/21-8/6. The air tidbit that recorded all of the other air temperature data seemed to be undisturbed.

Station 03C02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	97
Max Daily Temperature Threshold of 18 °C	69

This station was located beneath the Hwy 534 bridge over Carpenter Creek. This area had some tidal influence acting on it as well, however the low water height was still above the instream tidbit so that it never went dry.

Station 03C03

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	52
Max Daily Temperature Threshold of 18 °C	11

This station was located on Carpenter Creek adjacent to Stackpole Road about 200 feet north of Kanoko Lane. Water movement throughout this reach is sluggish and there were lots of water plants in the stream that added to the reduction in water movement. The air tidbit was only about one foot from the water surface and may have been submerged during some of the major storm events during the study period.

Station 03C04

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	1
Max Daily Temperature Threshold of 18 °C	0

This station was located (with permission) on private property on Little Mountain Road on Carpenter Creek, and was located in a well shaded area. The temperature data does not need any qualifying.

Station 03CL01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	40
Max Daily Temperature Threshold of 18 °C	25

This station was located on the south side of Swan Lake Road near the intersection of Babcock and Mud Lake Roads on an unnamed stream. This seemed to be only an ephemeral stream and it pretty much dried up during the summer. The dry period was discerned from the air and water temperature comparisons as occurring from July 12th until it was recovered in October (at which point it was still dry), and data for that time period was excluded.

Station 03EF01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	51
Max Daily Temperature Threshold of 18 °C	25

This station was located immediately downstream of the Hwy 9 bridge on the East Fork Nookachamps River. The original instream tidbit was anchored to a large piece of woody debris that (unexpectedly) was washed away during the large June storm event. After the instream tidbit was replaced on 7/23 no further problems were encountered.

Station 03EF02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	48
Max Daily Temperature Threshold of 18 °C	15

This station was initially located on the left bank about 20 feet from the Beaver Lake Road bridge on the East Fork Nookachamps River. There was a continuous flow gage operated by Ecology's Stream Hydrology unit also located near the bridge. This station was placed above any influence from the mouth of the unnamed stream for 03U01. The instream tidbit was then moved to the right bank on July 3rd after the download check found the drop in water height had changed the thalweg from the left to right bank. The second location had more vegetative shade cover than the previous location. There does not appear to be any bad data before the probe was moved, and all data was retained.

Station 03F01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	0
Max Daily Temperature Threshold of 18 °C	0

This station was located about 30 feet downstream of the Franklin Road bridge on Fisher Creek. The instream tidbit was well shaded and had no problems with going dry. The air tidbit recorded temperatures much lower than the reference temperatures collected during the download checks. The location of the air tidbit was close to the ground and the placement seems to have resulted in cooler air temperature measurements than what would more likely represent an "average" air temp. for that site.

Station 03F02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	43
Max Daily Temperature Threshold of 18 °C	8

This station was located, with permission, on private property about 500 feet downstream from the crossing with Starbird Road on Fisher Creek. The instream tidbit was well shaded and always submerged, however the creek was found to have stopped almost all surface flow on 9/17 (there was only a small trickle between that would probably be less than 1% of the normal flow) and the instream tidbit was just basically in a large pond. I talked with a person that lives there and they said the creek had been pretty much dried up for a month. Most of the water data during late July through August is qualified.

Station 03H01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	54
Max Daily Temperature Threshold of 18 °C	11

This station was located about 50 feet downstream of the Hoehn Road bridge on Hansen Creek. There seemed to be a lot of bed movement in this location, on July 3rd the instream tidbit was found partially buried with sediment. This was the only time it was found in this condition, and it doesn't seem to have significantly affected temperature measurements during June. Ground temperature was also recorded at this location.

Station 03H02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	19
Max Daily Temperature Threshold of 18 °C	0

This station on Hansen Creek was located about 50 feet upstream of the Hwy 20 bridge crossing. The instream tidbit was missing on August 16th and all data from 7/3-8/16 was lost. All other data for the study period was recovered.

Station 03H03

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	18
Max Daily Temperature Threshold of 18 °C	3

This station was located on Hansen Creek about 300 feet from the crossing with Hansen Creek Road. Everything went well with this station and none of the data needs to be cut or qualified.

Station 03J01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	0
Max Daily Temperature Threshold of 18 °C	0

This station was next to Johnson Creek road only 10 feet from the culvert crossing the road. This reach of streambed is really nothing more than a deep ditch (although the water was shallow). The tidbit was found partially buried with sediment on August 7th, however this does not appear to have negatively influenced the temperature readings. The instream tidbit appears to have been submerged for the entire study period, however the stream surface water flow was not much when I checked it (est. <0.5cfs during download checks).

Station 03N01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	116 (118 not tidally corrected)
Max Daily Temperature Threshold of 18 °C	88 (90 not tidally corrected)

This station was located at the Francis Road crossing of the Nookachamps River about 400 feet from its confluence with the Skagit River. This station was tidally influenced similarly to 03C01. The only time the instream tidbit was found dry was during the station's removal on 10/18. The instream temperatures exceedences were probably real as exhibited by the next station upstream, 03N02, which was not tidally influenced and never went dry but still had exceedences, however the maximum temperatures may not be accurate and should be qualified as such. The air tidbit was close to the ground and appears to have been influenced by cooler ground temperatures.

Station 03N02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	111
Max Daily Temperature Threshold of 18 °C	78

This station was located on the Nookachamps River approximately 150 feet downstream of the Hwy 9 bridge near the Big Rock gas station. This reach was not tidally influenced and at the bottom of a steep box-shaped canyon with lots of vegetative shading along with good topographic shading. There did not appear to be any problems with the instream tidbit, although the location moved downstream about 20 feet to allow for lowering water height. I could not find the air tidbit that was originally installed on 5/22, so another was installed on 8/30 but the previous air temperature data was lost. However, that air tidbit was mistakenly set to record at 1 min intervals so only data from 8/30-9/22 was collected.

Station 03N03

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	133
Max Daily Temperature Threshold of 18 °C	111

This station was located at the crossing of Hwy 9 and the Nookachamps River below Big Lake. The instream temperature of this reach is heavily controlled by Big Lake and is obvious in the thermograph comparison with the air temperature. The instream tidbit was found barely covered with water on 8/15 and was moved to a location directly underneath the Hwy 9 bridge. It is difficult to tell from the temperature data if the instream tidbit was dry at anytime, but it seems that it was wet for the period leading up to it being found on 8/15.

Station 03N04

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	25
Max Daily Temperature Threshold of 18 °C	6

This station was located on the Nookachamps River above Big Lake as it crosses Hwy 9 near Devil's Creek Lane. The instream tidbit was attached to the side of an old piling underneath the bridge. The instream tidbit was submerged during the entire study period, and no data needs to be qualified.

Station 03S01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	0
Max Daily Temperature Threshold of 18 °C	0

This station was located on Sandy Creek about 15 feet upstream from the culvert on Kanoko Lane. The instream tidbit was submerged during the entire study period. No data needs to be qualified.

Station 03T01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	40
Max Daily Temperature Threshold of 18 °C	5

This station was located on Turner Creek about 20 feet downstream of the crossing with Beaver Lake Road. There is no riparian shading along this reach of the creek and it is adjacent to the Beaver Lake Rock and Gravel quarry. The location of the instream tidbit was changed on 7/3 when it was found to be dry, and the new location was about 10 feet upstream from the initial location. It was not possible to discern exactly when it went dry since it started recording data 4 days after it was installed, so I did not include any water temperature data up until it was moved on 7/3. The air tidbit data was corrupt when downloaded on 8/20 and 10/18 so no air temperature data was included after 7/3.

Station 03U01

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	24
Max Daily Temperature Threshold of 18 °C	0

This station was located on an unnamed stream that enters the East Fork Nookachamps just above the bridge where 03EF02 is located. The air temperature information from 03EF02 was used to compare with the instream temperature. The instream tidbit did not appear to go dry at any point during the study period. I would estimate the amount of water this small stream contributes to the East Fork at about 5% of the East Fork during low flow conditions.

Station 03U02

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	57
Max Daily Temperature Threshold of 18 °C	12

This station was located on an unnamed stream on Otter Pond Road approximately 0.5 mile from Hwy 9. The instream tidbit appears to have stayed submerged for the entire study period. Small freshwater lampreys, maybe western brook lamprey, were seen creating little mounds (spawning possibly) at this site during the tidbit installations.

Station 03U03

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	3
Max Daily Temperature Threshold of 18 °C	0

This station was located on an unnamed creek immediately downstream of the culvert crossing Lake Cavanaugh Road approximately 1 mile from Hwy 9. The instream tidbit was downloaded once on 8/15 but was not found when the station was being removed on 10/17. Consequently all instream temperature data during this period of mid-August to mid-October was lost.

Station 03U04

	<u>Total Daily Exceedences</u>
Max Daily Temperature Threshold of 16 °C	97
Max Daily Temperature Threshold of 18 °C	50

This station was located on Red Creek (previously thought to be unnamed) as it crosses the pedestrian trail adjacent to Hwy20. The only point of access to this creek was in an area where the stream was undefined in a muddy grassy area. The instream tidbit was placed in the thalweg of this creek as close to the fence as possible. The grassy area just upstream has a slight impounding effect on the creek but water was moving in the area of the instream tidbit.

Appendix B. Tables.

Table B-1. Riparian codes used in Shade Model Vegetation Classification.

Code	Source	Description	Height (m)	Density (%)	OH (m)
301	DEQ	Water	0.0	0%	0.0
302	DEQ	Pastures/Cultivated Field/lawn	0.5	75%	0.0
304	DEQ	Barren - Rock	0.0	0%	0.0
305	DEQ	Barren - Embankment	0.0	0%	0.0
308	DEQ	Barren - Clearcut	0.0	0%	0.0
309	DEQ	Barren - Soil	0.0	0%	0.0
400	DEQ	Barren - Road	0.0	0%	0.0
401	DEQ	Barren - Forest Road	0.0	0%	0.0
500	DEQ	L. Mixed Con/Hard (50-100% CC)	24.4	75%	2.4
501	DEQ	S. Mixed Con/Hard (50-100% CC)	8.2	60%	1.0
502	ECY	Mixed Forest	45.7	90%	4.6
550	DEQ	L. Mixed Con/Hard (<50% CC)	24.4	25%	2.4
551	DEQ	S. Mixed Con/Hard (<50% CC)	12.2	25%	1.2
555	DEQ	L. Mixed Con/Hard (10% CC)	16.4	10%	2.1
600	DEQ	Large Hardwood	30.0	75%	4.0
601	DEQ	Small Hardwood	12.2	35%	1.2
650	DEQ	Large Hardwood	15.0	30%	1.9
651	DEQ	Small Hardwood	6.2	40%	0.9
652	DEQ	Small Hardwood	15.0	35%	0.9
655	DEQ	Large Hardwood	15.0	10%	1.9
700	DEQ	Large Conifer	30.5	90%	3.1
701	DEQ	Small Conifer	10.2	60%	1.0
750	DEQ	Large Conifer	20.3	30%	2.0
751	DEQ	Small Conifer	10.2	30%	1.0
755	DEQ	Western Juniper	5.4	10%	0.5
800	DEQ	Upland shrubs	4.6	75%	0.5
800	DEQ	Shrubs on wet floodplain	0.8	25%	-0.7
820	ECY	Riparian Shrubs (blackberries)	1.8	75%	0.3
850	DEQ	Upland Shrubs	1.8	25%	0.3
851	DEQ	Shrubs on wet floodplain	1.8	25%	0.3
900	DEQ	Grasses - upland	0.5	75%	0.3
901	DEQ	Grasses - saturated	0.5	75%	0.3
3011	DEQ	Active Channel Bottom	0.0	0%	0.0
3248	DEQ	Development - Residential	6.1	100%	0.0
3249	DEQ	Development - Industrial	9.1	100%	0.0
3252	DEQ	Dam/Wier	0.0	0%	0.0
3255	DEQ	Canal	0.0	0%	0.0
3256	DEQ	Dike	0.0	0%	0.0
1	DEQ	Klamath Marsh Area	0.5	90%	0.3
5555	DEQ	Disturbance	0.0	0%	0.0
4000	DEQ	Upland Shrubs	1.8	80%	0.3
4001	DEQ	Riparian Shrubs	3.2	90%	0.5
5000	DEQ	Upland Grasses	0.5	90%	0.3
5001	DEQ	Sedge/Rush	0.5	90%	0.3
4111	DEQ	Klamath Marsh Area	0.5	90%	0.3
4304	DEQ	Barren - Rock	0.0	0%	0.0
4500	DEQ	L. Mixed Con/Hard (50-100% CC)	16.4	60%	2.1
4550	DEQ	L. Mixed Con/Hard (<50% CC)	16.4	30%	2.1
4600	DEQ	Large Hardwood	12.5	60%	1.9
4650	DEQ	Large Hardwood	12.5	30%	1.9
4700	DEQ	Large Conifer	20.3	60%	2.0
4750	DEQ	Large Conifer	20.3	30%	2.0

Table B-2. Additional riparian codes used for 100-yr old riparian vegetation..

Code	Source	Description	Height (m)	Density (%)	OH (m)
67	Site index	67-Douglas fir & Red alder	33.3	85%	3.0
98	Site index	98-Red alder, Western red cedar	27.4	75%	3.0
136	Site index	136-Red alder	24.4	75%	3.0
123	Site index	123- Western red cedar, Douglas fir, Red alder	25.9	75%	3.0
125	Site index	Douglas fir, Red alder	31.4	75%	3.0
124	Site index	Douglas fir, Red alder	31.4	75%	3.0
17	Site index	Douglas fir, Red alder	28.0	75%	3.0
114	Site index	Red alder, Western red cedar	25.9	72%	3.0
157	Site index	Douglas fir, Red alder	36.5	75%	3.0
136	Site index	Red alder, Western red cedar	24.4	75%	3.0
92	Site index	Douglas fir, Red alder	35.6	75%	3.0
56	Site index	Douglas fir, Red alder	34.1	75%	3.0
34	Site index	Douglas fir, Red alder	35.2	75%	3.0
11	Site index	Red alder	25.9	75%	3.0
101	Site index	Red alder	24.4	75%	3.0
145	Site index	Red alder, Western red cedar	36.6	80%	3.0
101	Site index	Douglas fir, Red alder	36.6	80%	3.0
56	Site index	Douglas fir, Red alder	34.1	80%	3.0
101	Site index	Red alder, Western red cedar	36.6	80%	3.0
123	Site index	Red alder, Douglas fir, Western red cedar	36.6	80%	3.0
118	Site index	Douglas fir, Red alder	37.1	80%	3.0
89	Site index	Douglas fir and Red alder	35.2	80%	3.0
34	Site index	Douglas fir and Red alder	35.2	80%	3.0
101	Site index	Red alder	36.6	80%	3.0
136	Site index	Red alder and Western red cedar	36.6	80%	3.0
56	Site index	Douglas fir and Red alder	34.1	80%	3.0

ECY- Washington State Department of Ecology

DEQ- Oregon Department of Environmental Quality

Site Index- A designation of the quality of a forest site (typically based on soil type) and based on the height of the dominant stand at an arbitrary age, In this case, representing the total height of leading trees at 100 years of age.

Table B-3. 7Q2 and 7Q10 low flow model inputs for discharge, width, depth, and velocity

Carpenter Creek- 7Q2					Hansen Creek- 7Q2				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03C04	0.0195	3.12	0.037	0.091	03H03	0.029	2.22	0.027	0.152
03C03	0.0195	3.17	0.043	0.122	03H02	0.064	2.91	0.052	0.182
03C02	0.0195	3.29	0.07	0.305	03H01	0.038	3.23	0.067	0.182
03C01	0.1082	3.35	0.079	0.427					
Carpenter Creek- 7Q10					Hansen Creek- 7Q10				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03C04	0.0065	3.05	0.028	0.031	03H03	0.011	1.72	0.012	0.12
03C03	0.0065	3.09	0.03	0.061	03H02	0.025	2.26	0.028	0.152
03C02	0.0065	3.2	0.049	0.152	03H01	0.013	2.5	0.037	0.152
03C01	0.0361	3.23	0.058	0.213					
Fisher Creek- 7Q2					Lake Creek- 7Q2				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03F02	0.0184	1.71	0.091	0.091	03N04	0.034	3.53	0.085	0.085
03F01	0.0184	1.78	0.122	0.091					
Fisher Creek- 7Q10					Lake Creek- 7Q10				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03F02	0.0061	1.39	0.07	0.061	03N04	0.011	2.61	0.064	0.052
03F01	0.0061	1.43	0.073	0.061					
Nookachamps Creek- 7Q2					EF Nookachamps Creek- 7Q2				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03N03	0.048	4.57	0.113	0.128	03EF02	0.0433	4.37	0.116	0.128
03N02	0.101	4.88	0.119	0.143	03EF01	0.1033	5.00	0.137	0.158
03N01	0.204	6.35	0.155	0.216					
Nookachamps Creek- 7Q10					EF Nookachamps Creek- 7Q10				
Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)	Station	Q (cms)	Width (m)	Depth (m)	Velocity (m/s)
03N03	0.016	3.39	0.082	0.08	03EF02	0.016	3.31	0.082	0.08
03N02	0.034	3.61	0.088	0.088	03EF01	0.034	3.77	0.098	0.1
03N01	0.068	4.7	0.116	0.134					

Table B-4. Summary of flow measurements in the lower Skagit River study area.

Station	Date	Stream Name	Wetted Width in ft	Average Depth in ft	Average Velocity (fps)	Discharge in cfs
03B01	8/7/2001	Bulson Creek	6.60	0.24	0.29	0.46
03B01	8/15/2001	Bulson Cr at Bulson Rd	7.10	0.24	0.24	0.40
03C01	5/23/2001	Carpenter Cr near mouth	14.60	0.36	1.24	6.57
03C02	7/3/2001	Carpenter Creek	13.80	0.34	1.00	4.69
03C02	8/6/2001	Carpenter Creek	11.30	0.23	0.50	1.30
03C02	8/15/2001	Carpenter Cr at SR534	9.60	0.08	0.21	0.17
03C02	9/19/2001	Carpenter Cr @ Hwy 534	10.70	0.18	0.35	0.68
03C02	10/19/2001	Carpenter Cr blw Bulson Cr	17.50	0.60	0.78	8.22
03C04	5/23/2001	Carpenter Cr Headwater	10.73	0.21	1.38	3.12
03C04	7/23/2001	Carpenter Cr Headwater	10.50	0.07	0.33	0.24
03C04	8/15/2001	Carpenter Cr at Little Mtn Rd	10.10	0.07	0.22	0.16
03C04	9/19/2001	Carpenter Cr @ Headwater	10.10	0.11	0.07	0.07
03C04	10/19/2001	Carpenter Cr Headwater	11.00	0.32	0.98	3.45
03EF01	5/22/2001	E Fork Nookachamps	37.60	1.20	1.87	84.34
03EF01	7/23/2001	E.F. Nookachamps)@ Hwy9	22.90	0.73	0.50	8.29
03EF01	8/15/2001	E. F. Nookachamps at SR9	13.10	0.26	1.41	4.81
03EF01	8/21/2001	E. Fork Nookachamps	19.60	0.63	0.32	3.99
03EF01	9/5/2001	E Fork Nookachamps	22.33	0.60	0.67	8.99
03EF01	10/18/2001	E Fork Nookachamps mouth	25.10	0.84	1.36	28.63
03EF02	8/20/2001	E. Fork Nookachamps	38.40	0.34	0.17	2.18
03F01	5/23/2001	Fisher near mouth	8.20	0.57	0.96	4.46
03F01	6/21/2001	Fisher Cr near mouth	7.90	0.76	0.59	3.57
03F01	8/6/2001	Fisher Cr @ Franklin Rd	7.80	0.56	0.15	0.65
03F01	8/15/2001	Fisher Cr at Franklin Rd	13.00	0.12	0.28	0.42
03F01	9/17/2001	Fisher Cr @ Franklin Rd	10.07	0.20	0.27	0.53
03F01	10/19/2001	Fisher Cr near mouth	8.40	0.58	1.18	5.80
03F02	8/15/2001	Fisher Cr at Starbird Rd	13.50	0.39	0.00	0.00
03H01	5/21/2001	Hansen Cr near mouth	22.60	1.04	1.14	26.71
03H01	8/15/2001	Hansen Cr at Hoehn Rd	17.40	0.11	0.61	1.18
03H01	8/16/2001	Hansen Cr @ Hoehn Rd	7.40	0.30	0.60	1.31
03H01	9/20/2001	Hansen Creek	9.08	0.33	0.42	1.27
03H01	10/18/2001	Hansen Cr near mouth	12.55	0.93	0.57	6.67
03H02	8/15/2001	Hansen Cr at SR20	17.50	0.16	0.53	1.50
03H02	8/16/2001	Hansen Creek	12.80	0.30	0.59	3.55
03H03	8/16/2001	Hansen Creek Headwater	6.48	0.22	0.69	0.98
03J01	8/7/2001	Johnson Creek	4.00	0.02	0.06	0.01
03J01	8/15/2001	Johnson Cr at Johnson Rd	4.50	0.02	0.01	0.00
03N01f	7/3/2001	Nookachamps @ Swan Rd	56.35	1.53	0.38	32.51
03N01F	8/15/2001	Nookachamps at Swan Rd	28.65	0.52	1.26	18.81
03N01f	8/31/2001	Nookachamps	32.80	0.81	0.41	10.96
03N01f	9/17/2001	Nookachamps mouth flow site	28.35	0.54	0.39	6.03
03N01f	10/18/2001	Nookachamps mouth flow site	49.09	0.98	1.09	52.67
03N02	8/30/2001	Nookachamps @ Hwy9 Intersection	18.63	0.39	0.16	1.13
03N03	8/15/2001	Nookachamps blw Big Lake	9.10	0.19	0.33	0.58
03N03	8/21/2001	Nookachamps blw Big lake	9.15	0.18	0.51	0.86
03N04	5/22/2001	Nookachamps Headwater	20.60	0.29	1.34	8.11
03N04	7/23/2001	Nookachamps	17.50	0.40	0.16	1.14
03N04	8/15/2001	Nookachamps abv Big Lake	4.32	0.12	0.75	0.39
03N04	8/21/2001	Nookachamps abv Big lake	17.80	0.41	0.10	0.70
03N04	9/5/2001	Nookachamps abv Big lake	17.40	0.39	0.11	0.76
03N04	10/19/2001	Nookachamps Headwater	18.50	0.71	0.89	12.01
03S01	8/7/2001	Sandy Creek	5.10	0.17	0.09	0.08
03S01	8/15/2001	Sandy Cr at Kanoko Ln	4.70	0.14	0.11	0.07
03T01	8/15/2001	Turner Cr @ Beaver Lake Rd	2.50	0.14	0.60	0.20
03T01	8/20/2001	Turner Creek	2.40	0.15	0.54	0.19